



8885 Lundy's Lane, Niagara Falls Transportation Impact Study Update

Paradigm Transportation Solutions Limited

January 2024

Project Number

220571

8885 Lundy's Lane, Niagara Falls Transportation Impact Study Update

January 2024

Client

Linda Ford
M5V Developments
501 Queen Street West,
Toronto, Ontario, M5V 2B4,

Consultant Project Team

Stew Elkins, B.E.S., MITE
Adam J. Makarewicz, C.E.T., MITE
Erica Bayley, P.Eng.

Disclaimer

This document has been prepared for the titled project or named part thereof (the "project") and except for approval and commenting municipalities and agencies in their review and approval of this project, should not be relied upon or used for any other project without an independent check being carried out as to its suitability and prior written authorization of Paradigm Transportation Solutions Limited being obtained. Paradigm Transportation Solutions Limited accepts no responsibility or liability for the consequence of this document being used for a purpose other than the project for which it was commissioned. Any person using or relying on the document for such other purpose agrees and will by such use or reliance be taken to confirm their agreement to indemnify Paradigm Transportation Solutions Limited for all loss or damage resulting there from. Paradigm Transportation Solutions Limited accepts no responsibility or liability for this document to any party other than the person by whom it was commissioned and the approval and commenting municipalities and agencies for the project.

To the extent that this report is based on information supplied by other parties, Paradigm Transportation Solutions Limited accepts no liability for any loss or damage suffered by the client, whether through contract or tort, stemming from any conclusions based on data supplied by parties other than Paradigm Transportation Solutions Limited and used by Paradigm Transportation Solutions Limited in preparing this rep

Paradigm Transportation Solutions Limited

5A-105 Pinebush Road
Cambridge ON N1R 8J8
p: 905.381.2229
www.ptsl.com

Executive Summary

Content

Paradigm Transportation Solutions Limited (Paradigm) was retained to conduct this Transportation Impact Study (TIS) for a residential development located on the northeast corner of Lundy's Lane and Garner Road in the City of Niagara Falls, Ontario.

This study aims to determine the impacts of the development traffic on the surrounding road network and identify any improvements necessary to accommodate this traffic.

Conclusions

This study evaluated the impacts of background traffic growth and the proposed development of 192 residential units and 14,364 square feet of commercial space. Full build-out is expected at or before 2025 for this report.

A new driveway connection proposes access to the Development through Garner Road. The connection is located at the northern terminus of the property. The proposed new Site Driveway will be designed with adequate width to provide for reasonable entry and exit from the development and accommodate emergency response vehicles; the proposed locations afford safe sight lines for all turning movements and approaches.

The development is projected to generate approximately 108-171 new vehicle trips during the weekday AM and PM peak hours.

Detailed traffic analysis was conducted for each study area intersection under existing traffic conditions and 2025 and 2030 background and total traffic conditions. Based on traffic data and analyses completed, the study area's intersections presently operate at a level of service (LOS) C or better during the weekday peak hours. LOS D or better is generally considered a well-functioning intersection in urban environments. With additional trips generated by the development, the impact on the study area's intersections is expected to be minimal as the intersections are forecast to continue to operate at LOS D or better.

The exception is the westbound left turn movement at the intersection of Lundy's Lane and Kalar Road. Increased delay is projected during the weekday PM peak hour under the 2030 Background and Total horizon caused by increased opposing volumes. However, it is recognized that the left-turn volume will not build a significant queue that would require a storage extension.

The analysis has further determined that an auxiliary left turn lane is not warranted under 2030 Total Horizon along Garner Road at the Site Driveway.



Additionally, an auxiliary right turn lane is not recommended as it would offer no tangible benefits in traffic operations.

Overall, the study finds that development-generated traffic should not significantly impact traffic operations within the study area and that the existing transportation infrastructure in the area can adequately accommodate the traffic volumes projected to be generated by the proposed development.

Recommendations

Based on the findings of this study, it is recommended that:

- ▶ That the Region and City monitor the future traffic volumes at the intersection of Lundy's Lane with Garner Road and Kalar Road and adjust signal timings as needed to correspond to changing traffic volumes; and
- ▶ The development implements a Transportation Demand Management program that will include the following at a minimum:
 - Transportation Information Package
 - Unbundled Parking
 - Bicycle Parking supply



Contents

1	Introduction	1
1.1	Overview.....	1
1.2	Purpose and Scope	1
1.3	Study Area.....	1
2	Existing Conditions.....	3
2.1	Roadway Characteristics	3
2.2	Transit Network.....	5
2.3	Pedestrian and Cycling Environment.....	7
2.4	Traffic Volumes.....	7
3	Development Concept.....	10
3.1	Development Description.....	10
3.2	Access and Circulation Review	10
3.3	Development Trip Generation.....	12
3.4	Development Trip Distribution and Assignment	12
4	Evaluation of Future Traffic Conditions.....	15
4.1	Traffic Forecasts.....	15
4.1.1	Background Projections	15
4.1.2	Total Projections	15
5	Operational Analysis.....	24
5.1	Level of Service Criteria	24
5.2	Intersection Capacity Analysis	25
5.2.1	Garner Road at Beaverdam Road.....	25
5.2.2	Lundy's Lane at Garner Road	25
5.2.3	Lundy's Lane at Kalar Road	25
5.2.4	Garner Road at Site Driveway	25
6	Mitigation Measures	28
6.1	Left Turn Lanes.....	28
6.2	Right Turn Lane	29
6.3	Sight Distance Evaluation	29
7	Transportation Demand Management	30
7.1	Proposed Strategies.....	30
7.1.1	Transportation Information.....	30
7.1.2	Unbundled Parking	30
7.1.3	Bicycle Parking	31



8 Conclusions..... 32

8.1 Conclusions 32

8.2 Recommendations..... 33

Appendices

Appendix A Pre-Study Consultation

Appendix B Traffic Data

Appendix C AutoTURN Analysis

Appendix D Operations Reports

Appendix E Left-Turn Lane Nomographs



Figures

Figure 1.1:	Location of Subject Site	2
Figure 2.1:	Existing Lane Configuration & Traffic Control.....	4
Figure 2.2:	Transit Network	6
Figure 2.3A:	Existing Traffic Volumes – AM Peak Hour.....	8
Figure 2.3B:	Existing Traffic Volumes – PM Peak Hour	9
Figure 3.1:	Site Concept Plan.....	11
Figure 3.2A:	Estimated Site-Generated Traffic – AM Peak Hour	13
Figure 3.2B:	Estimated Site-Generated Traffic – PM Peak Hour	14
Figure 4.1A:	Background Traffic (2025) – AM Peak Hour	16
Figure 4.1B:	Background Traffic (2025) – PM Peak Hour.....	17
Figure 4.2A:	Background Traffic (2030) – AM Peak Hour	18
Figure 4.2B:	Background Traffic (2030) – PM Peak Hour.....	19
Figure 4.3A:	Total Traffic (2025) – AM Peak Hour.....	20
Figure 4.3B:	Total Traffic (2025) – PM Peak Hour.....	21
Figure 4.4A:	Total Traffic (2030) – AM Peak Hour.....	22
Figure 4.4B:	Total Traffic (2030) – PM Peak Hour.....	23

Tables

Table 3.1:	Trip Generation	12
Table 3.2:	Trip Distribution	12
Table 5.1A:	Weekday AM Peak Hour Operations	26
Table 5.1B:	Weekday PM Peak Hour Operations	27
Table 6.1:	Left-Turn Lane Analysis (2030)	28
Table 6.2:	Sight Distance	29



1 Introduction

1.1 Overview

Paradigm Transportation Solutions Limited (Paradigm) was retained to conduct this Transportation Impact Study (TIS) for a residential development located on the northeast corner of Lundy's Lane and Garner Road in the City of Niagara Falls, Ontario.

Figure 1.1 illustrates the location of the subject site.

1.2 Purpose and Scope

This study aims to determine the impacts of the development traffic on the surrounding road network and identify any improvements necessary to accommodate the increase in traffic generated by this development. The scope of this study is to:

- ▶ Forecast traffic from the proposed development utilizing trip generation rates from the Institute of Transportation Engineers (ITE) Trip Generation and assignment to the surrounding road network;
- ▶ Assess the impact of existing and future traffic conditions with and without the proposed Development (2025 and 2030); and
- ▶ Recommend any improvements required to alleviate any operational or safety concerns (if required).


1.3 Study Area

Based on a review of the proposed development's anticipated trip generation and trip distribution, a study area was established through consultation with the Region of Niagara and City of Niagara Falls. The project study area includes the following intersections:

- ▶ Garner Road at Lundy's Lane (signalized);
- ▶ Garner Road at Kalar Road (signalized);
- ▶ Garner Road at Beaverdams Road (unsignalized); and

Appendix A contains the pre-study consultation material with the Region of Niagara and the City of Niagara Falls.



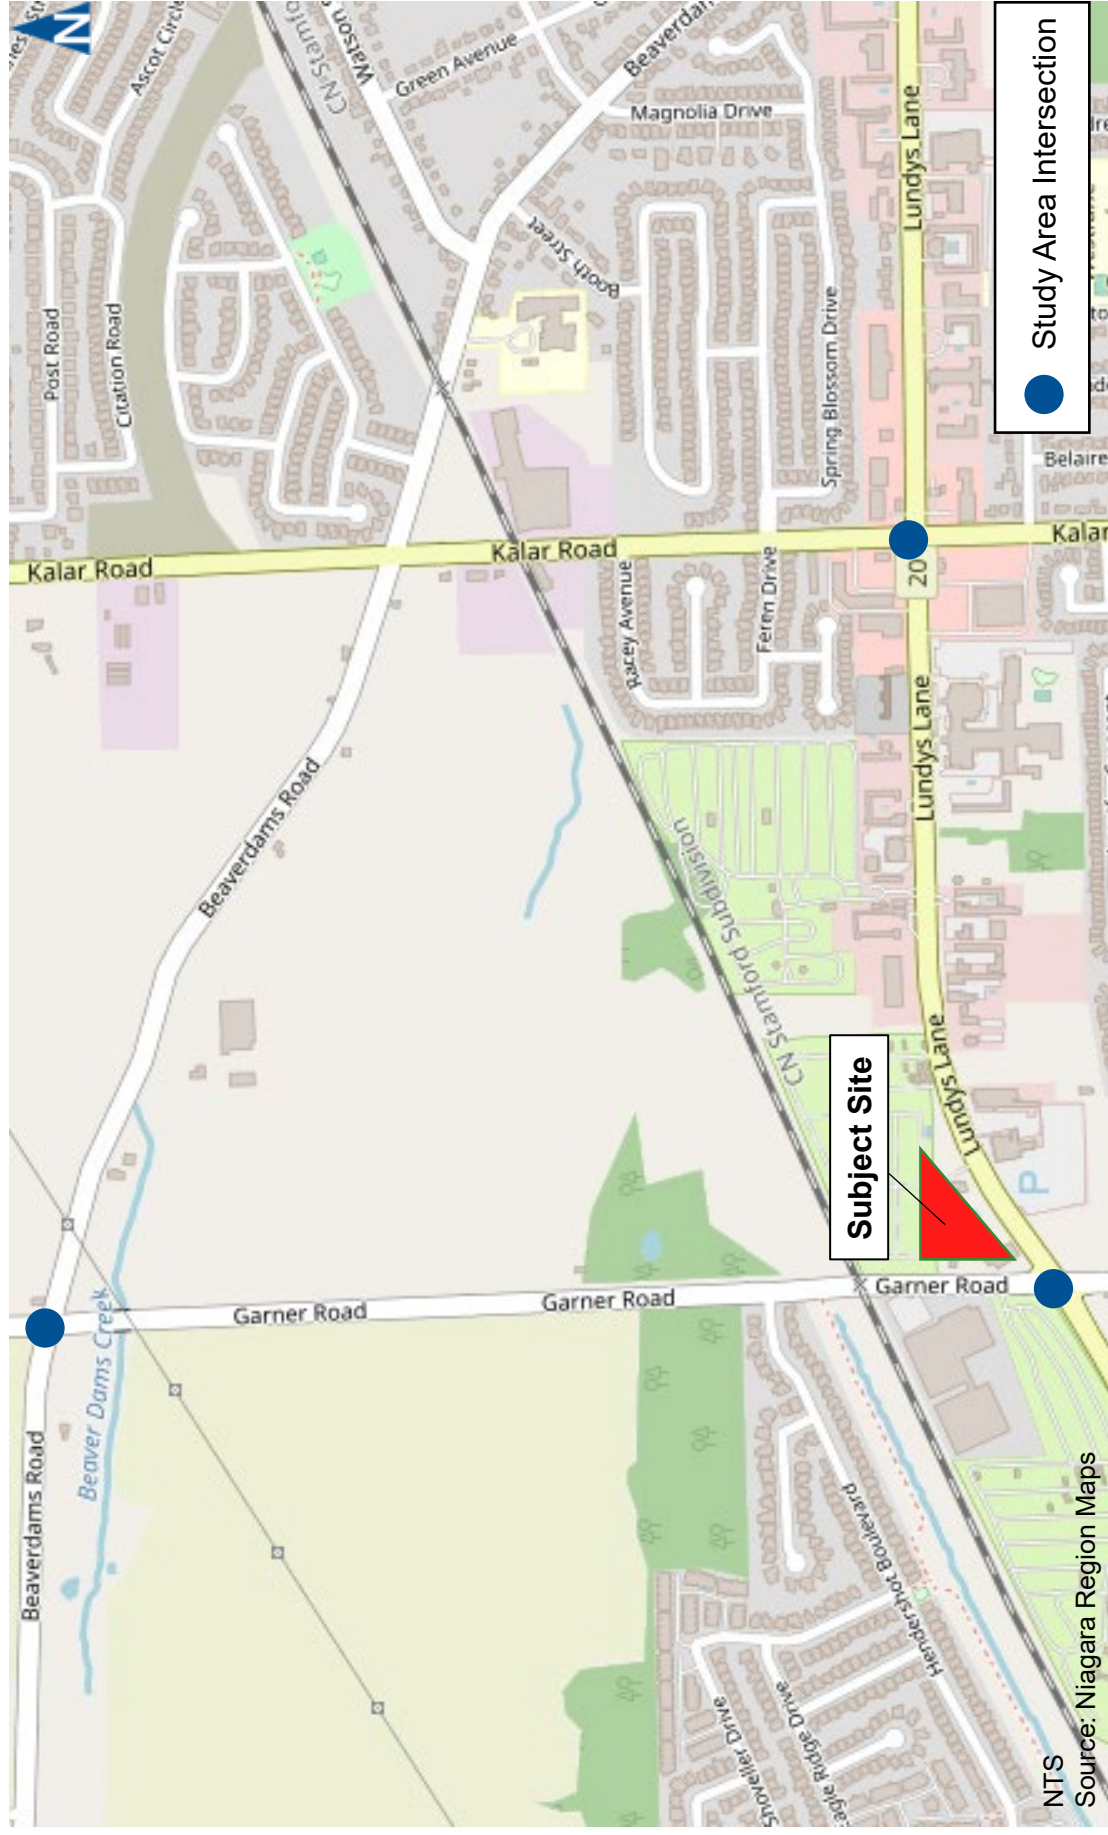

Study Area Intersection

Subject Site

NTS
Source: Niagara Region Maps



Subject Site Location

Figure 1.1

2 Existing Conditions

The existing conditions evaluation consisted of an inventory of the traffic control, roadway and intersection geometry in the study area and the collection of peak period traffic volumes.


2.1 Roadway Characteristics

The main roadways near the subject site considered in assessing the traffic impacts of the development include:

- ▶ **Garner Road** is a north-south arterial road under the City of Niagara Falls jurisdiction. The road has two travel lanes with variable shoulder widths through a rural cross-section south of Lundy's Lane. North of Lundy's Lane, an urban cross-section is provided with a sidewalk on the west side of the road. The posted speed limit on Garner Road is 60 km/h.
- ▶ **Regional Road 20 (Lundy's Lane)** is an east-west regional arterial roadway¹. The road has a four-lane cross-section east and a two-lane cross-section west of Garner Road. Sidewalks are provided on both sides of the road, east of Garner Road. The posted speed limit is 60 km/h, west of Garner Road and 50 km/h east of Garner Road.
- ▶ **Kalar Road** is a two-lane arterial road running north-south under the City of Niagara Falls jurisdiction. The road has a four-lane cross-section south and a two-lane cross-section north of Lundy's Lane. The posted speed limit on Kalar Road is 50 km/h. It is understood that the City of Niagara Falls is planning to upgrade Kalar Road to a four-lane urban cross-section with on-street cycling lanes from Lundy's Lane to Beaverdam Road. The reconstruction of Kalar Road however has not been scheduled.
- ▶ **Beaverdams Road** is an east-west arterial roadway under the City of Niagara Falls jurisdiction. The road has a two-lane cross-section with variable shoulder widths through a rural cross-section. East of Kalar Road, a sidewalk is provided on the north side. The posted speed limit on Beaverdams Road is 60 km/h.

Figure 2.1 illustrates the lane configurations and traffic control at the study area intersections.



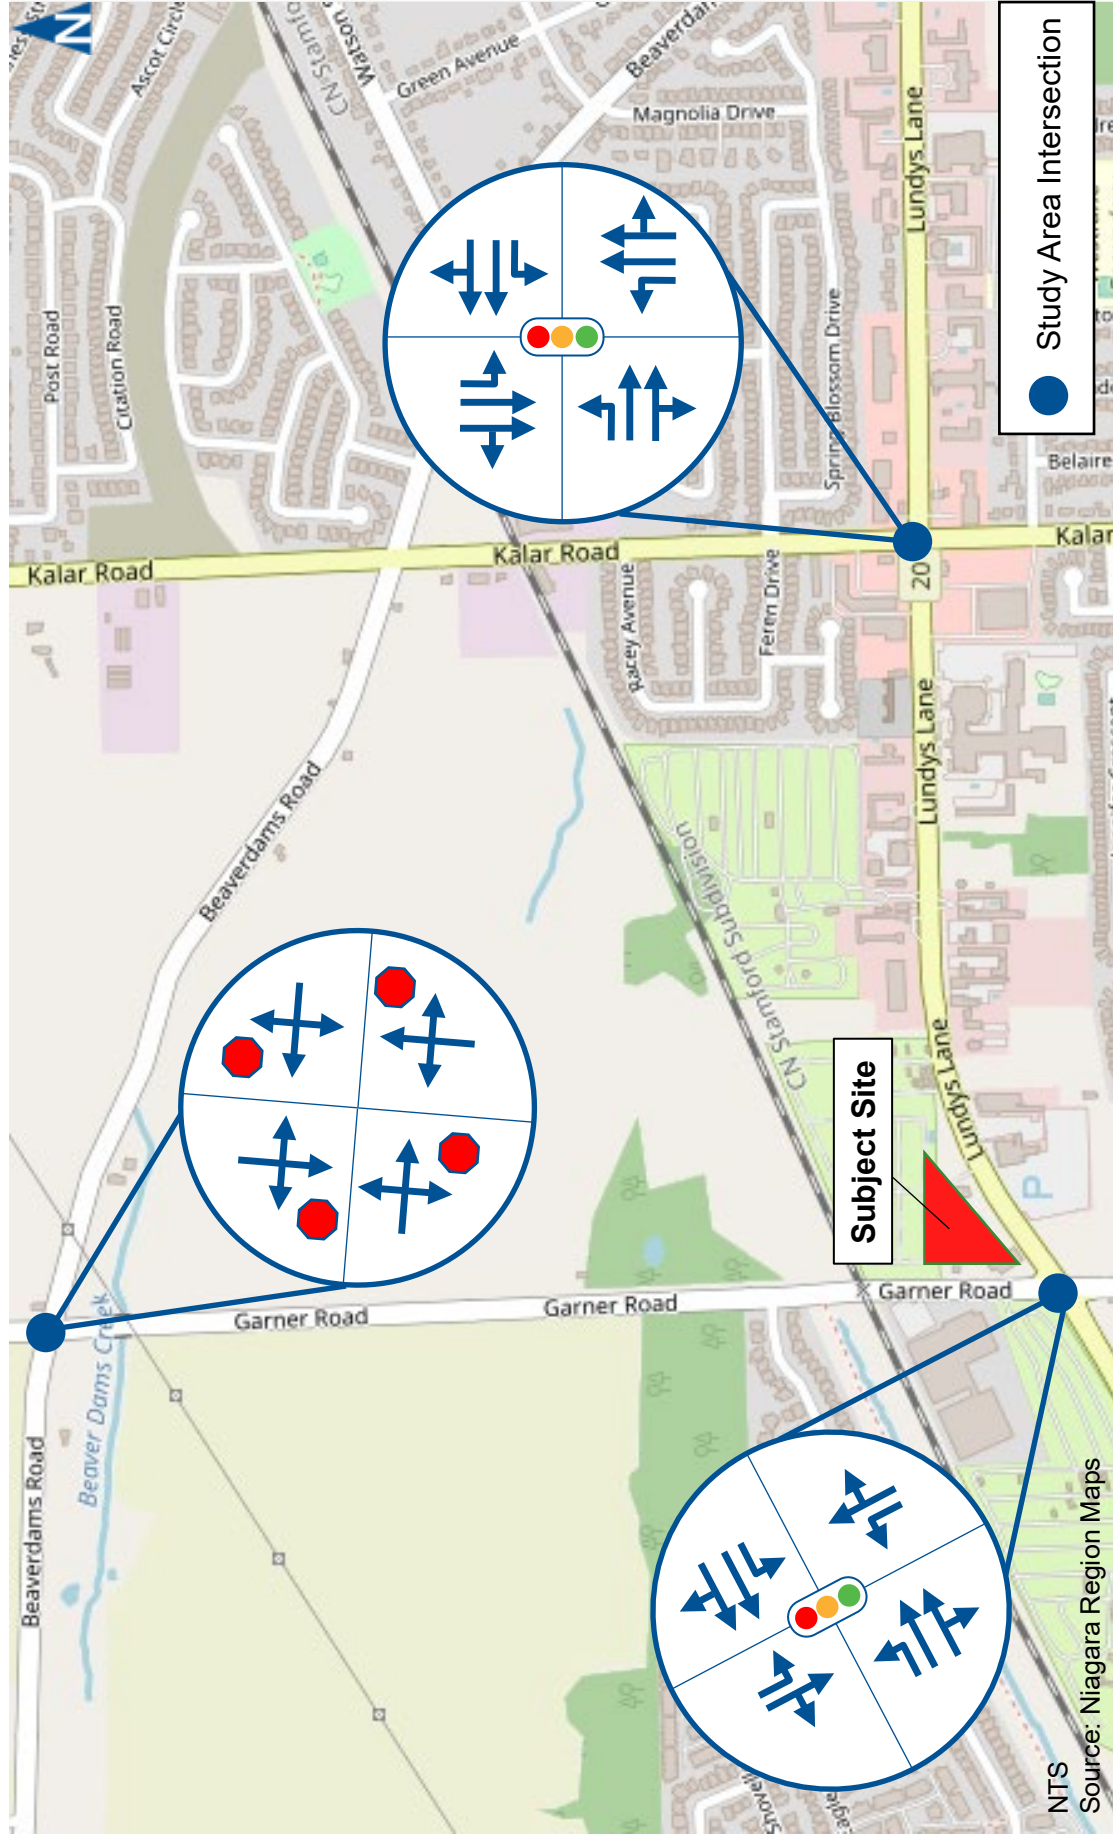

2.2 Transit Network


Transit service in Niagara Falls is provided by Niagara Region Transit (NRT). NRT is the result of an effort from Niagara Region and the 12 local municipalities to connect all of Niagara by combining the existing Niagara Region Transit, Niagara Falls Transit, St. Catharines Transit, Welland Transit and Fort Erie Transit systems into one transit operator that began on January 1, 2023.

NRT operates local transit routes within the city as well as regional service between various municipalities. The following routes, which provide connections with proximity to the subject site are as follows:

- ▶ **WEGO Red Line** operates along Lundy's Lane/Ferry Street to the Table Rock Welcome Centre. Headways range between 30 to 60 minutes. Service is provided seven days a week from approximately 6:00 AM to 10:00 PM Sunday to Thursday and 6:00 AM to 12:30 AM Friday and Saturday.

Figure 2.2 illustrates the existing public transit network within the study area. The closest bus stops are approximately 150 metres east of Garner Road.



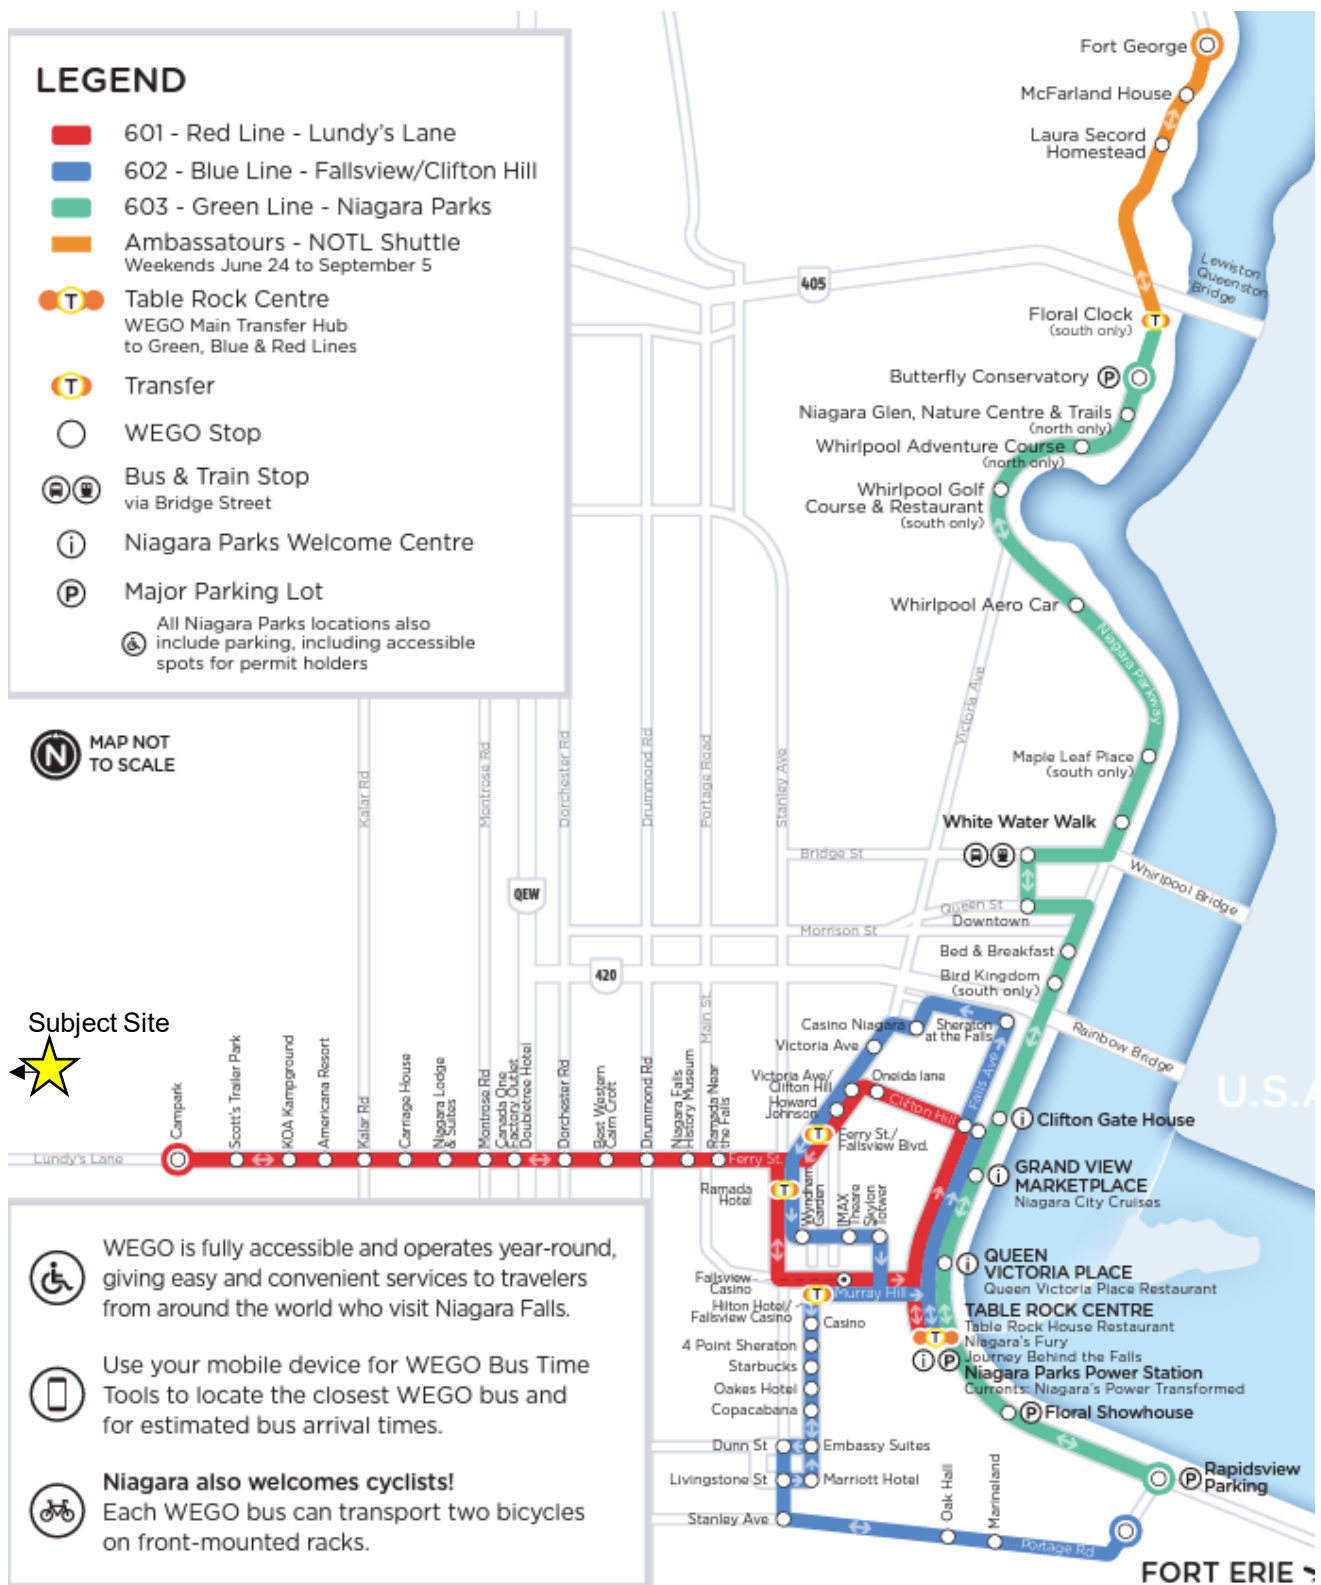

2.3 Pedestrian and Cycling Environment

Pedestrian infrastructure typically consists of sidewalks or multi-use paths parallel to the roadway. Cycling infrastructure typically consists of on-street and off-street facilities. On-street facilities comprise cycling lanes, signed cycling routes, and paved shoulders. Off-street facilities are in the form of multi-use or informal trails.


Pedestrian infrastructure within the study area consists of sidewalks on both sides of Lundy's Lane (east of Garner Road) and a pedestrian sidewalk on the west side of Garner Road (north of Lundy's Lane). There are no cycling facilities within the study area.


2.4 Traffic Volumes

Turning Movement Counts (TMC) are used to assess intersection operations and quantify vehicle movement. The traffic counts are usually collected during peak periods at an intersection to complete the level of service analysis. Existing traffic counts at an intersection or road section form the foundation for analysis.

Paradigm completed traffic counts in October 2022 at the study area intersections. **Figure 2.2** illustrates the existing peak-hour traffic. **Appendix B** contains the turning movement data.



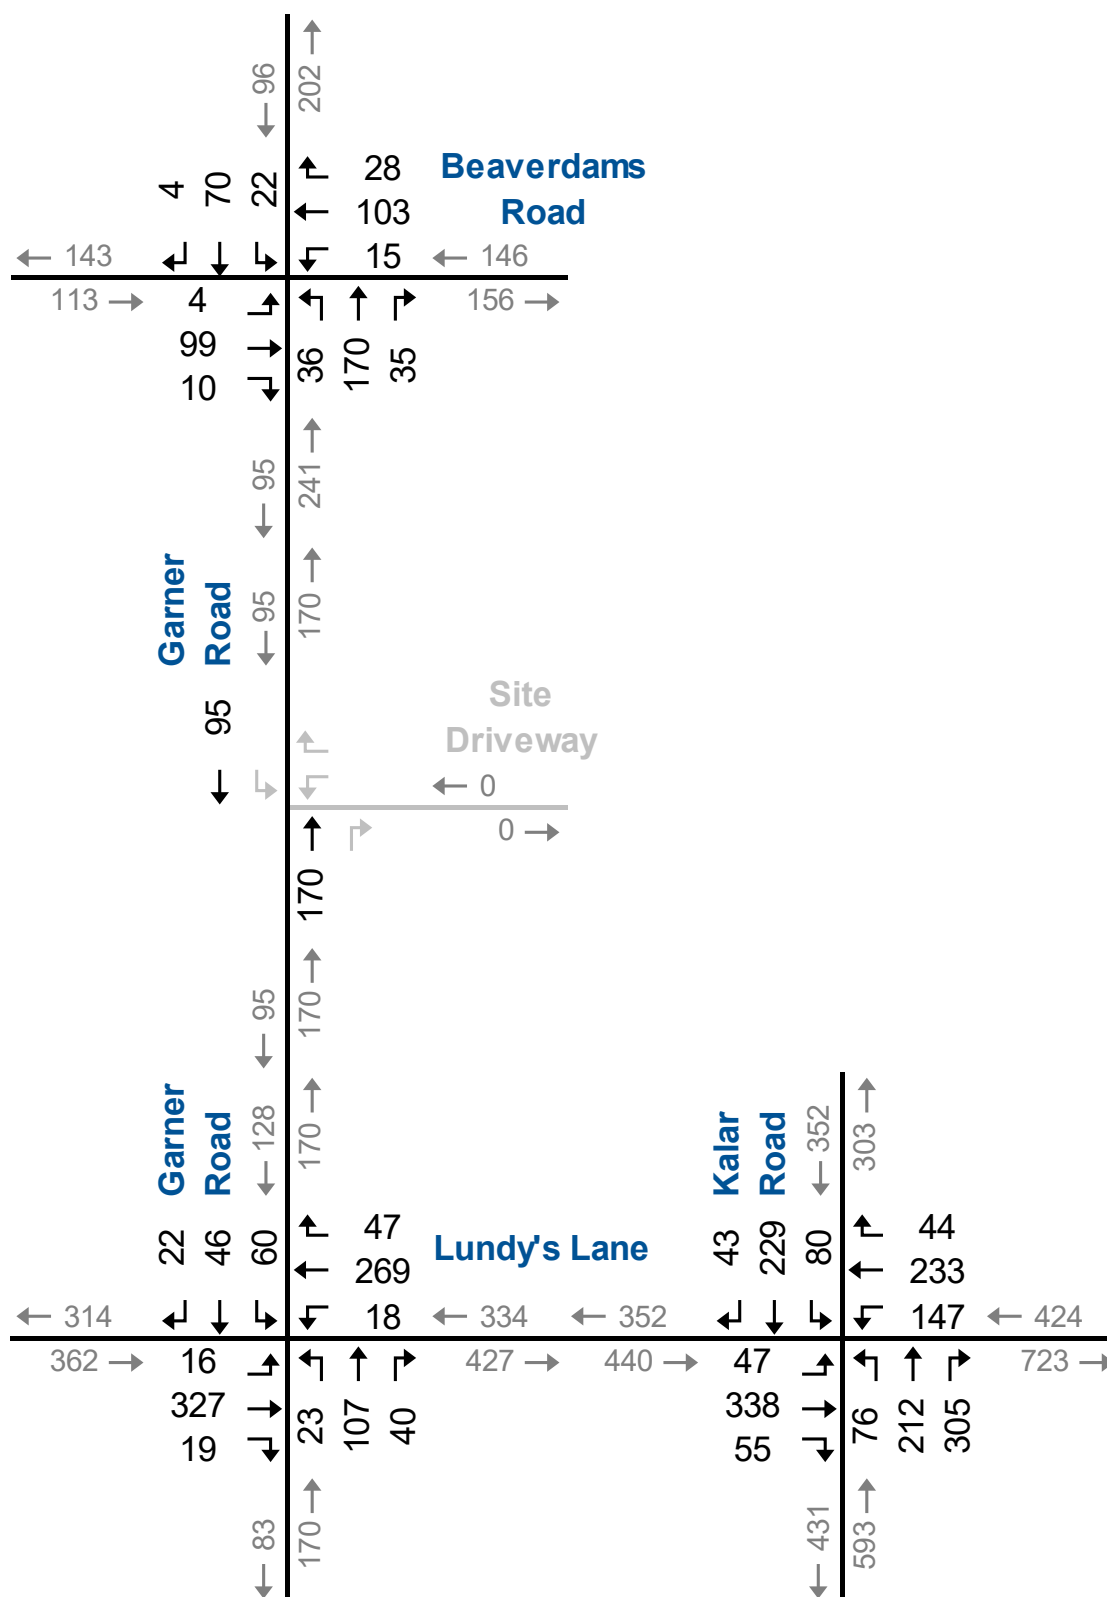

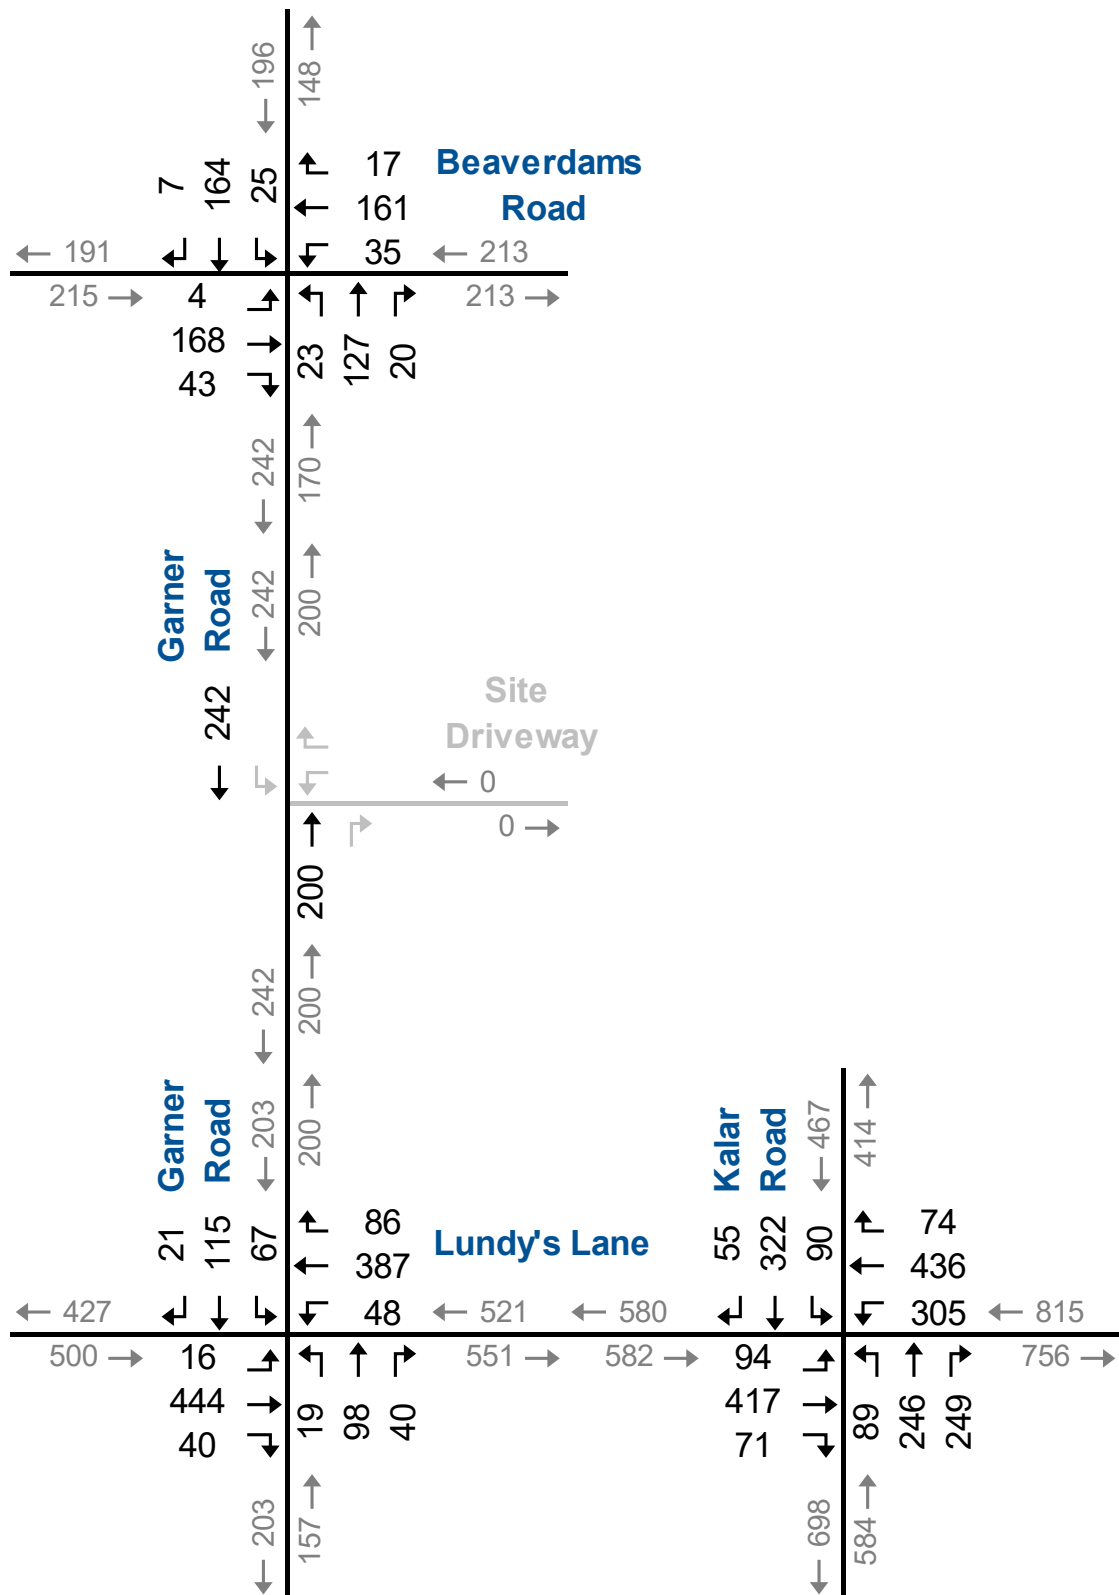

3 Development Concept

3.1 Development Description

The proposed development is located on a 0.95-hectare parcel of land within the northeast corner of Lundy's Lane and Garner Road. The preliminary concept plan indicates that the development will comprise 192 residential units and 14,364 square feet of commercial space. Full build-out is expected at or before 2025.

A driveway connection is proposed to Garner Road, located approximately 120 metres north of the Lundy's Lane and Garner Road intersection (centreline to centreline)

Figure 3.1 illustrates the conceptual site plan of the development.

3.2 Access and Circulation Review

A swept path analysis was conducted for the proposed internal driveway network.

The vehicle movements were examined using a CAD base file of the development plan dated 27 June 2023. The swept path analysis examined the on-site maneuverability of typical design vehicles expected to utilize the site: Heavy Single Unit (HSU), Fire Truck, Medium Single Unit (MSU) and Garbage Truck.

Appendix C provides the vehicle manoeuvring analysis, as well as the profile and dimensions of the design vehicles.

The AutoTURN analyses indicate that the large design vehicles do not have any difficulty entering the development through the proposed driveway connection to Garner Road or circumnavigating the internal roadway. The AutoTURN swept path analysis confirms the design vehicles will function adequately.





3.3 Development Trip Generation

The Institute of Transportation Engineers (ITE) Trip Generation Manual¹ was used to estimate the peak-hour traffic volumes this development will generate. Land Use Codes LUC 221 (Multi-Family Housing Mid-Rise) and LUC 822 (Strip Retail <40k) were utilized. The estimated total trip generation is displayed in **Table 3.1**, which indicates 108-171 trips are forecast to be generated during the weekday AM and PM peak hours, respectively.

TABLE 3.1: TRIP GENERATION

Land Use Code	GFA (sq. ft.)	Units	Trips	AM Peak Hour				PM Peak Hour			
				Rate	In	Out	Total	Rate	In	Out	Total
221 - Multi-Family Housing Mid Rise (Units)	-	194	Total	Eqn. ^a	17	57	74	Eqn. ^b	46	30	76
822 - Strip Retail (<40k) (GFA)	14,364	-	Total	2.36	20	14	34	6.59	47	48	95
Total Trip Generation			Total		37	71	108		93	78	171

$$^aT = 0.44(X) - 11.61$$

$$^bT = 0.39(X) + 0.34$$

3.4 Development Trip Distribution and Assignment

The trip distribution for the site was developed based on the existing link volumes at the external limits of the study area. **Table 3.2** summarizes the estimated trip distribution for the development.


TABLE 3.2: TRIP DISTRIBUTION


Direction (To/From)	Travel Route	%
North	Garner Road	9%
South	Garner Road	9%
East	Beaverdams Road	10%
	Lundy's Lane	39%
West	Lundy's Lane	23%
	Beaverdams Road	10%
Total		100%

The site traffic was assigned to the adjacent road network using trip generation and distribution. **Figure 3.2** illustrates the weekday AM and PM peak hour vehicle trips estimated to be generated by the subject site.

¹ Trip Generation Manual 11th Edition Institute of Transportation Engineers
Washington DC



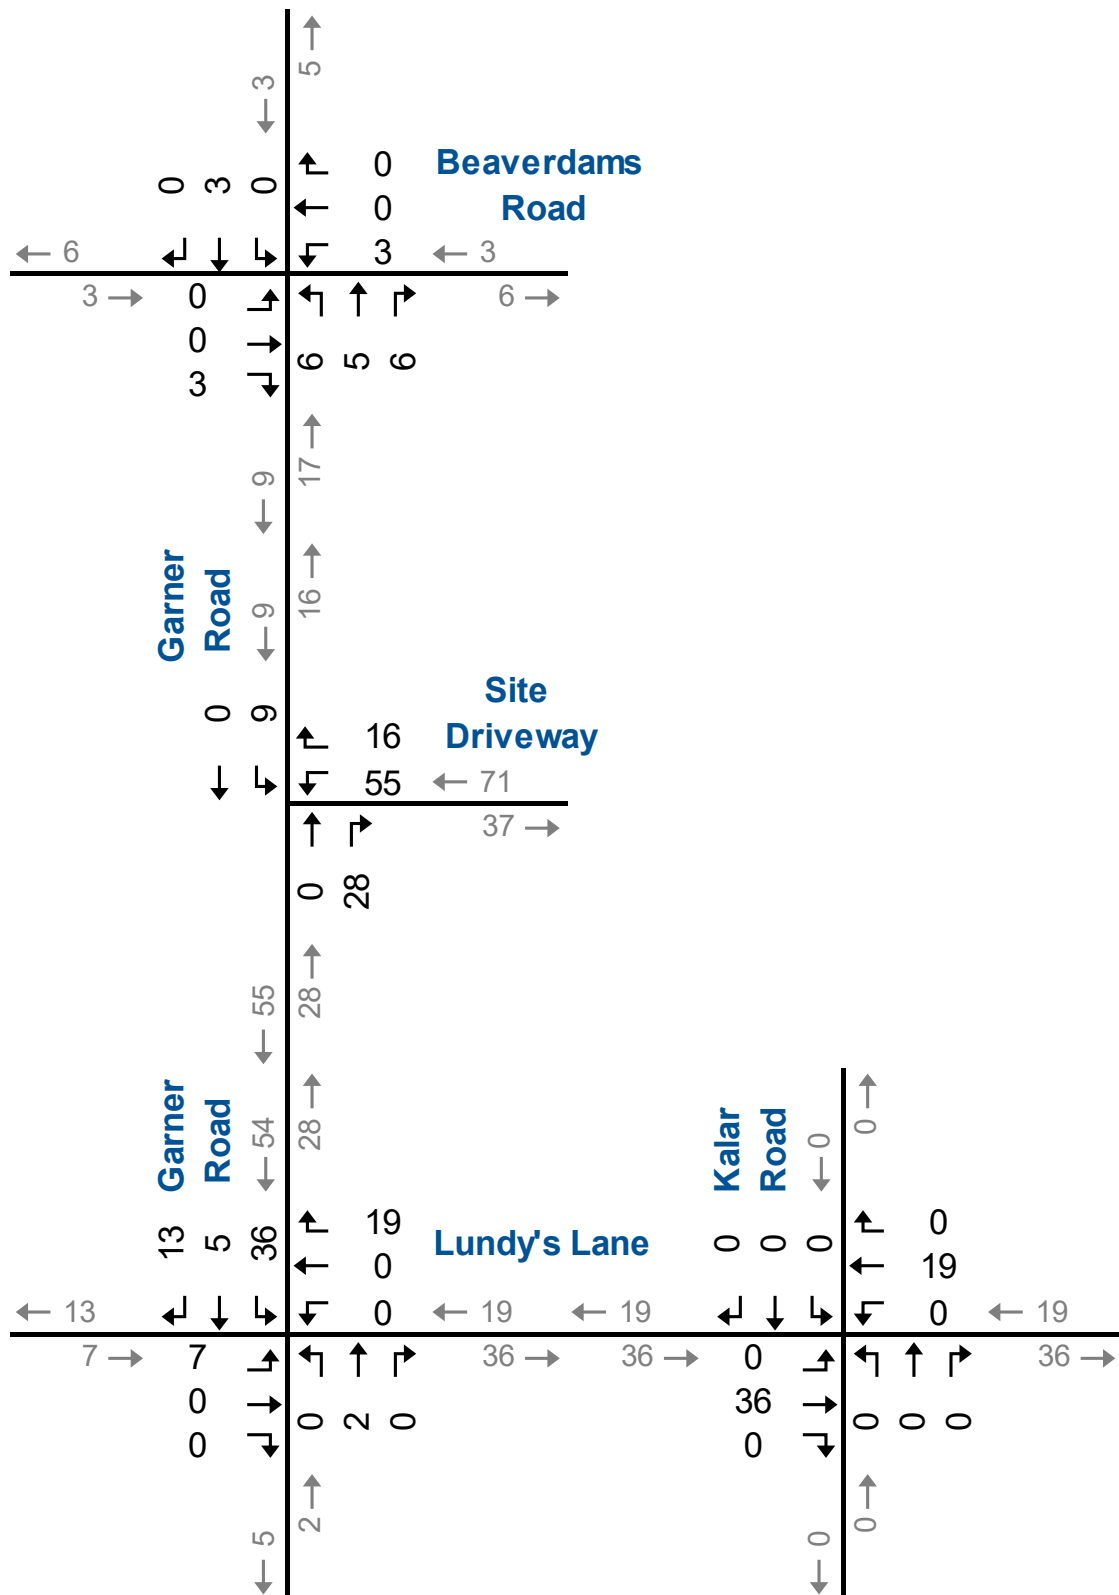

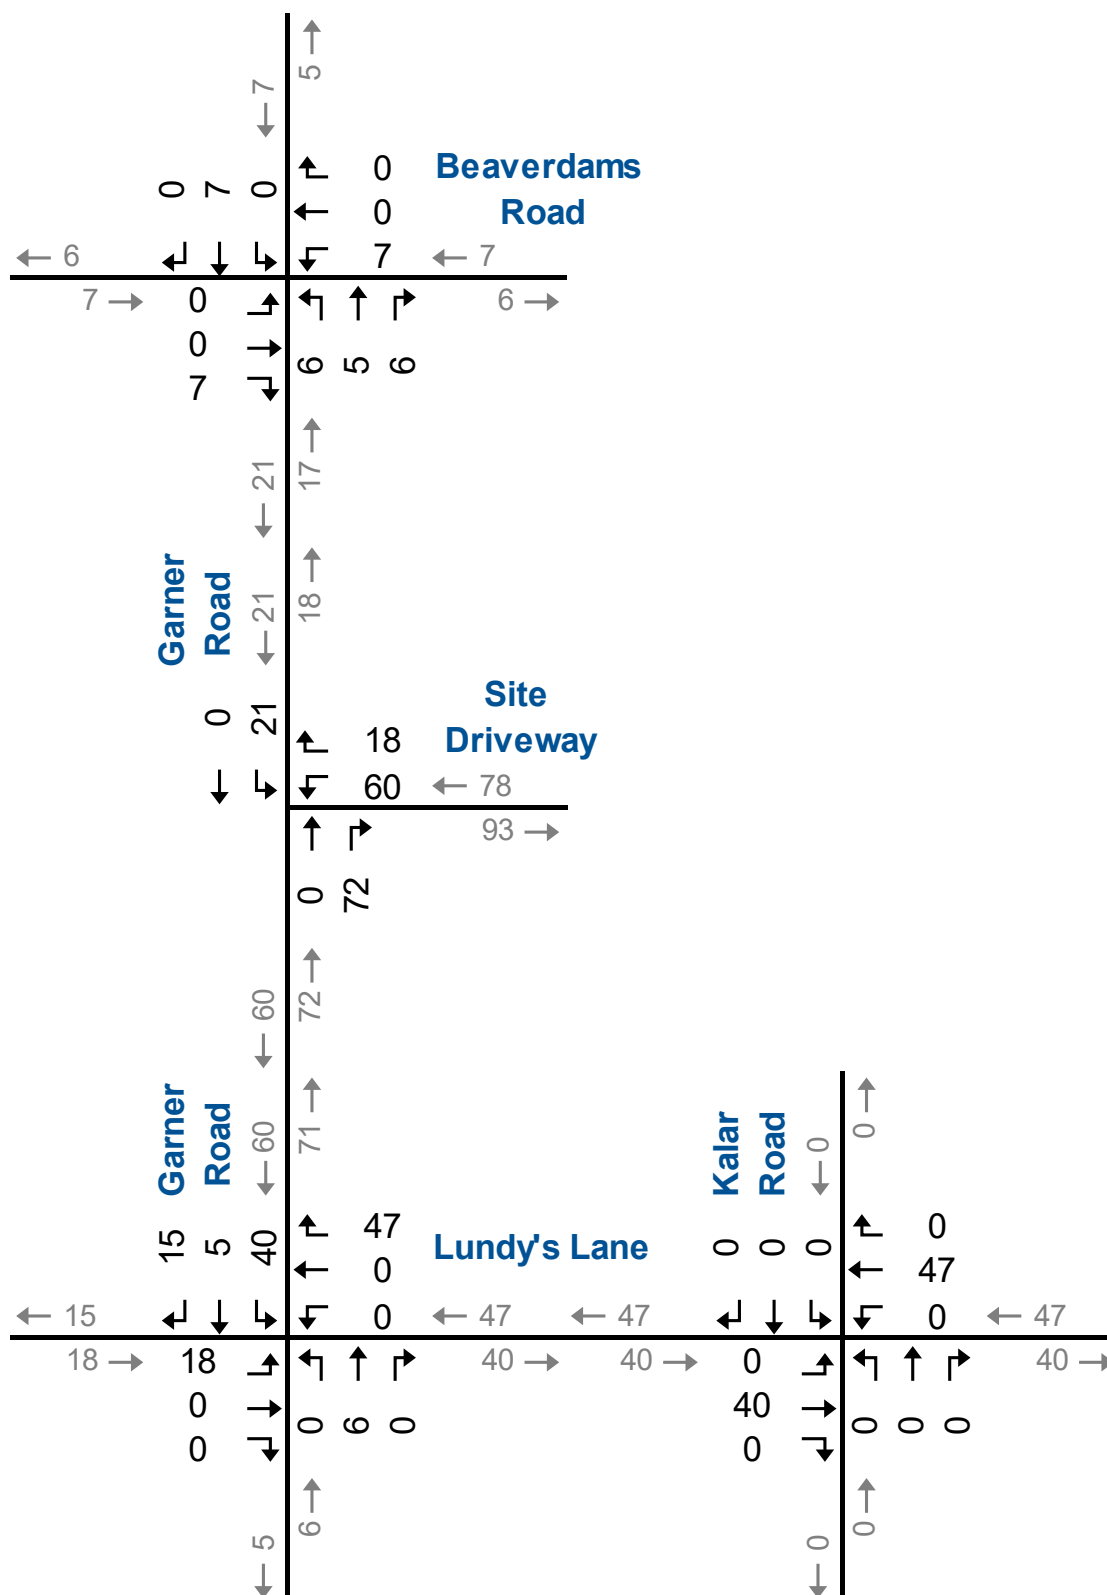

4 Evaluation of Future Traffic Conditions

The assessment of the future conditions in this section includes the following components necessary to assess the traffic implications on the adjacent road network:

- ▶ Future background traffic estimates;
- ▶ Level of service analysis for background traffic (pre-development);
- ▶ Future total traffic estimates; and
- ▶ Level of service analysis for total traffic (post-development).

4.1 Traffic Forecasts

To be consistent with the Region's Traffic Impact Study Guidelines and the pre-study consultation, the build-out year and five years after build-out have been used for forecasting and analysis.

The future background traffic volumes have been estimated by applying a growth rate of 2.0% compounded per annum to the existing traffic volumes. The Town provided this growth rate during the pre-study consultation.


4.1.1 Background Projections


The weekday AM and PM peak hour background traffic volumes for the 2025 and 2030 horizon are illustrated in **Figures 4.1 and 4.2**.


4.1.2 Total Projections


The projected site-generated traffic volumes were added to the Background projections to develop the Total traffic volumes. The weekday AM and PM peak hour Total traffic volumes for the 2025 and 2030 horizon are illustrated in **Figures 4.3 and 4.4**.




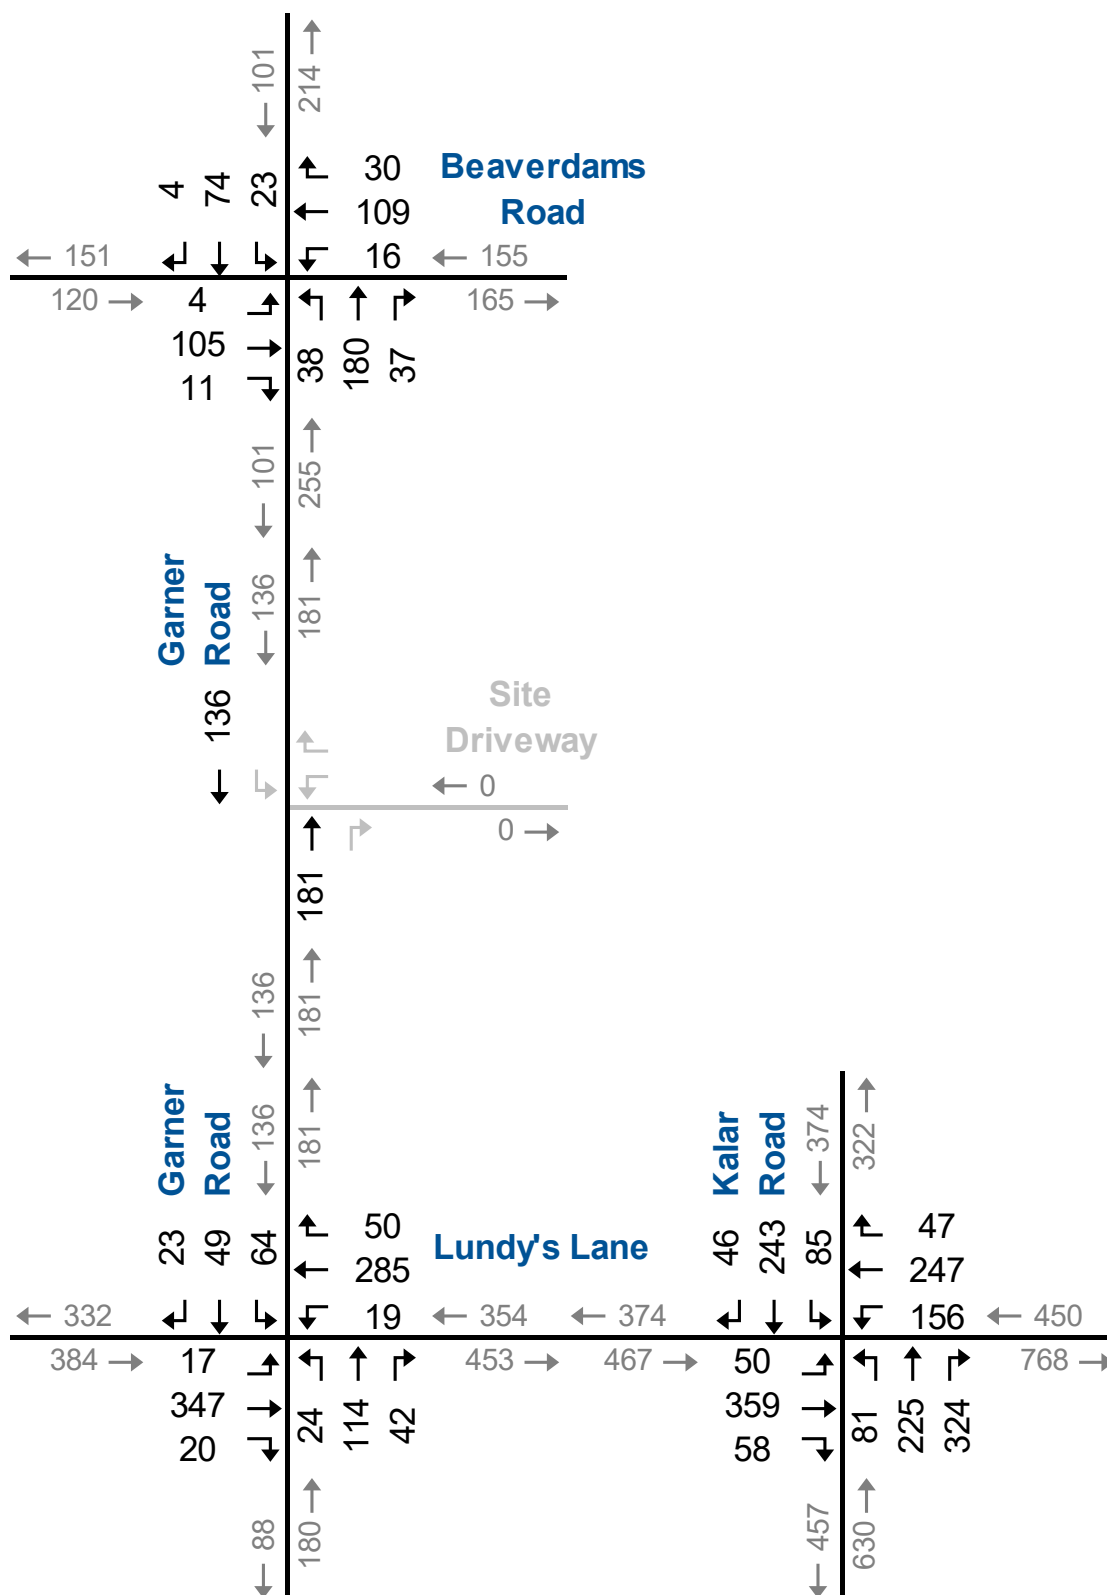


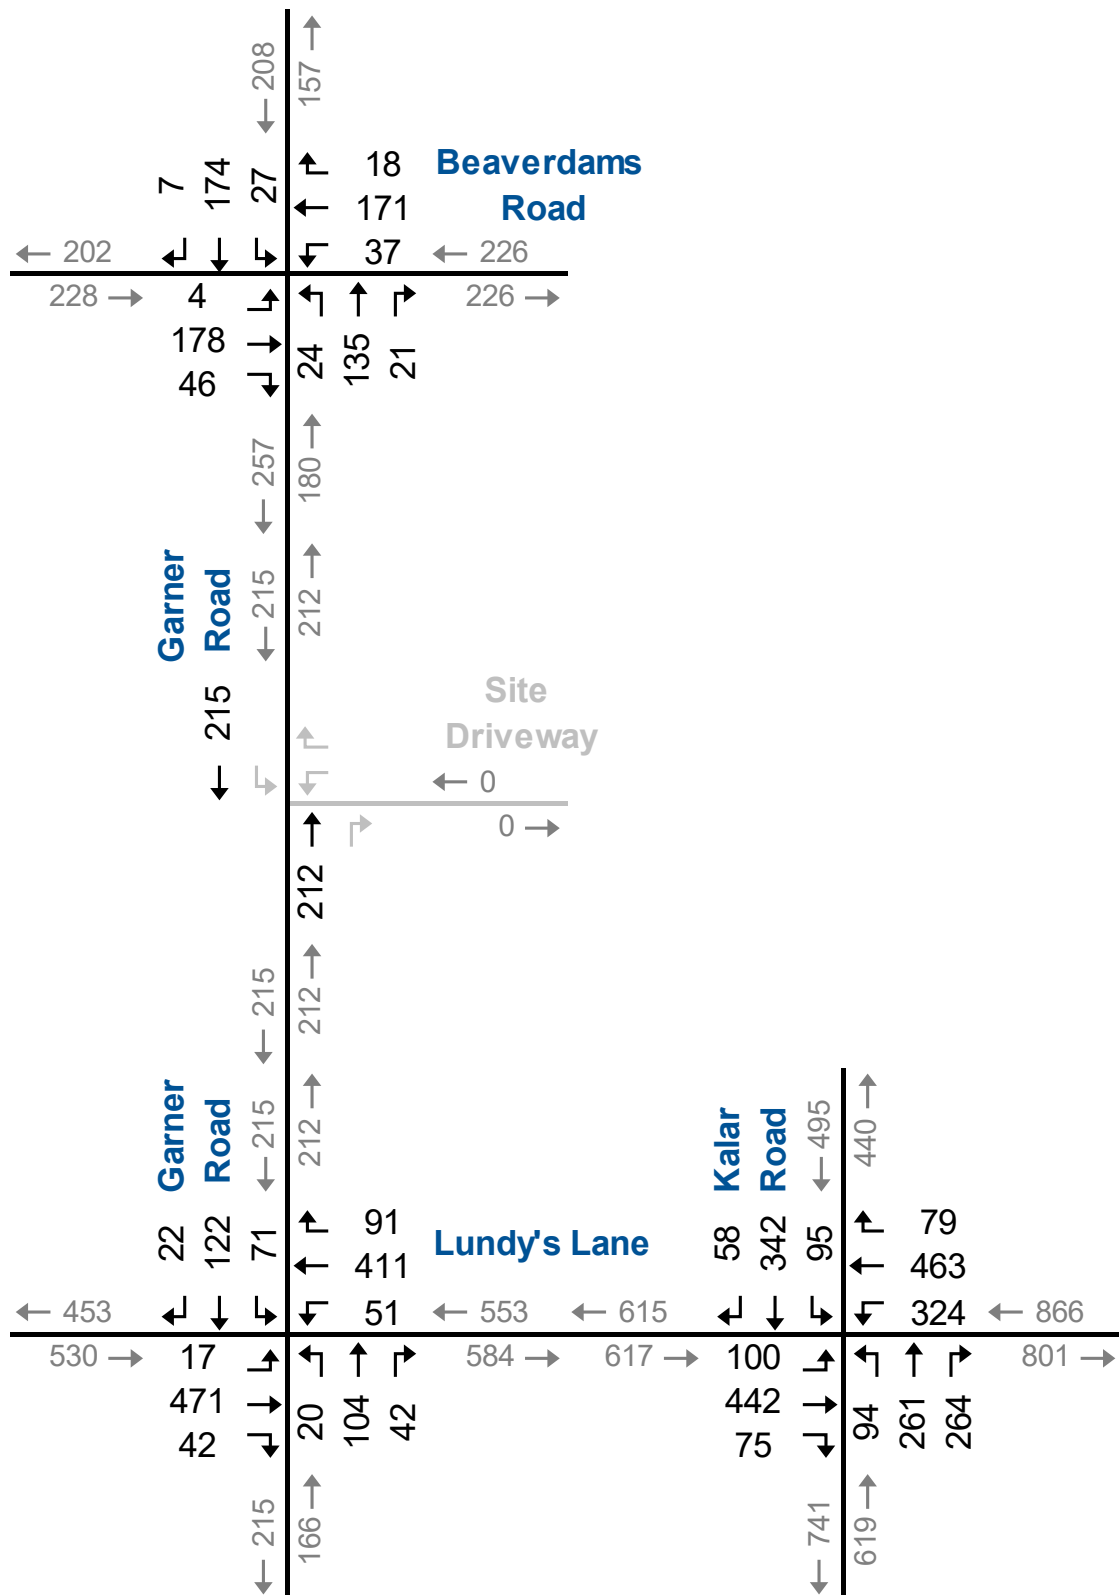


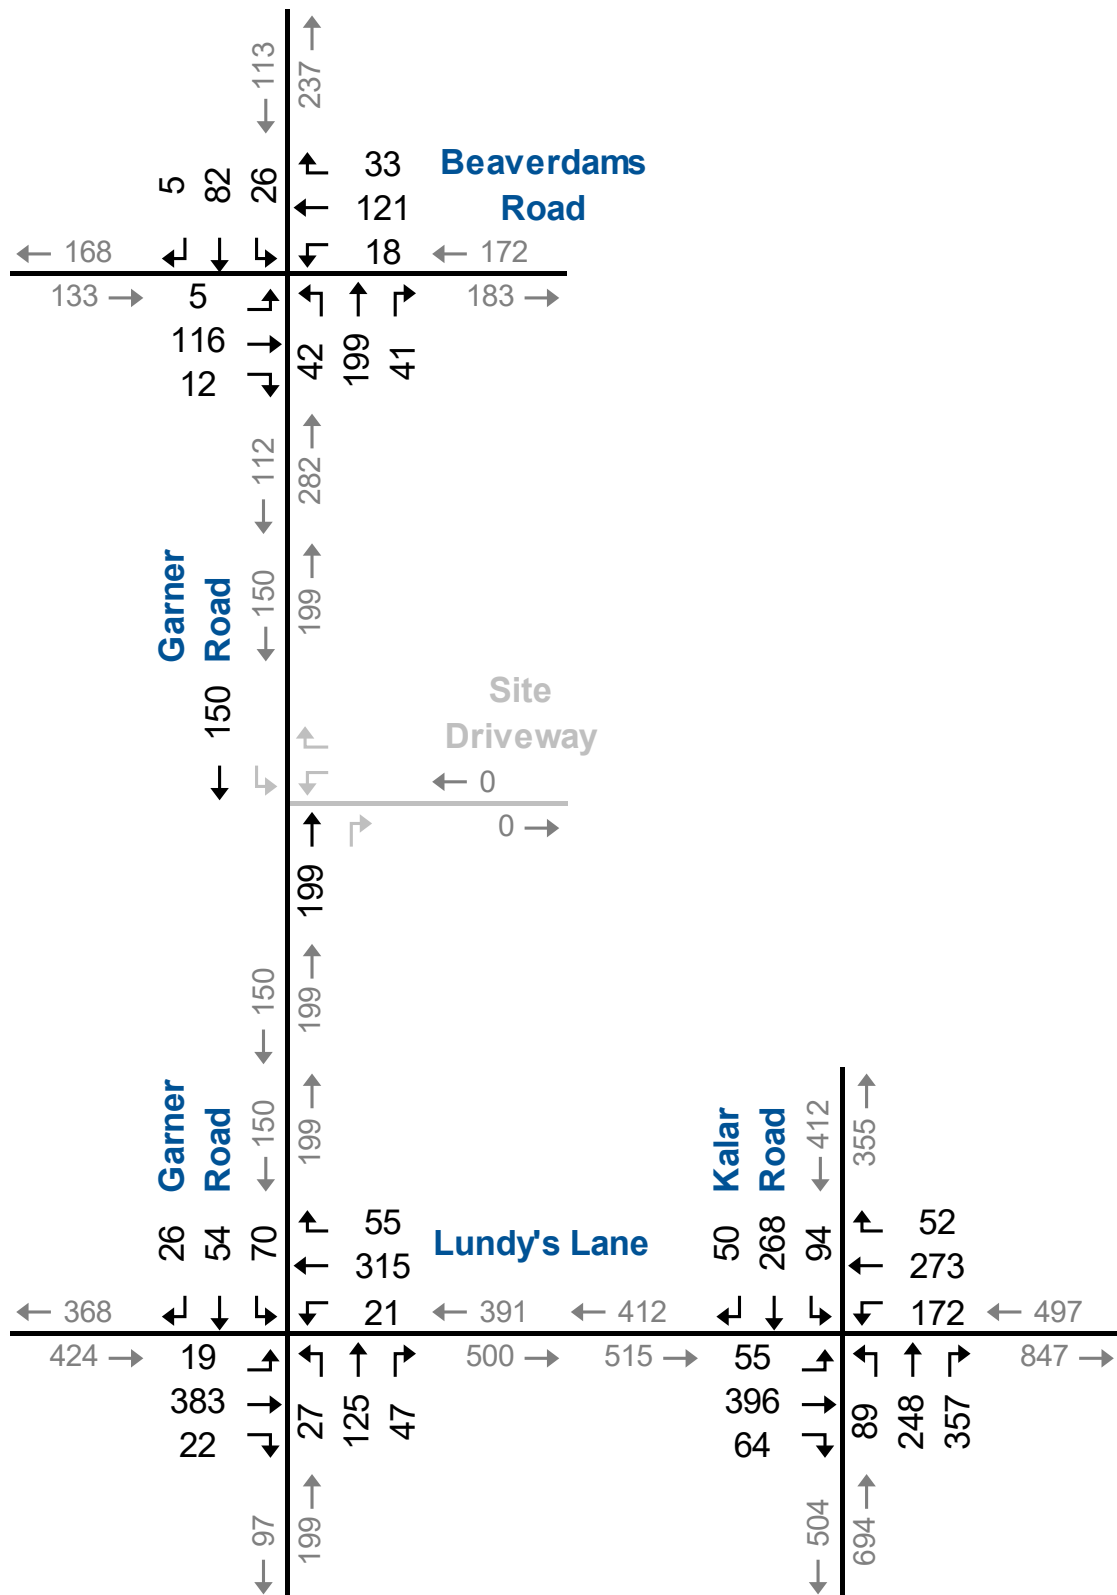


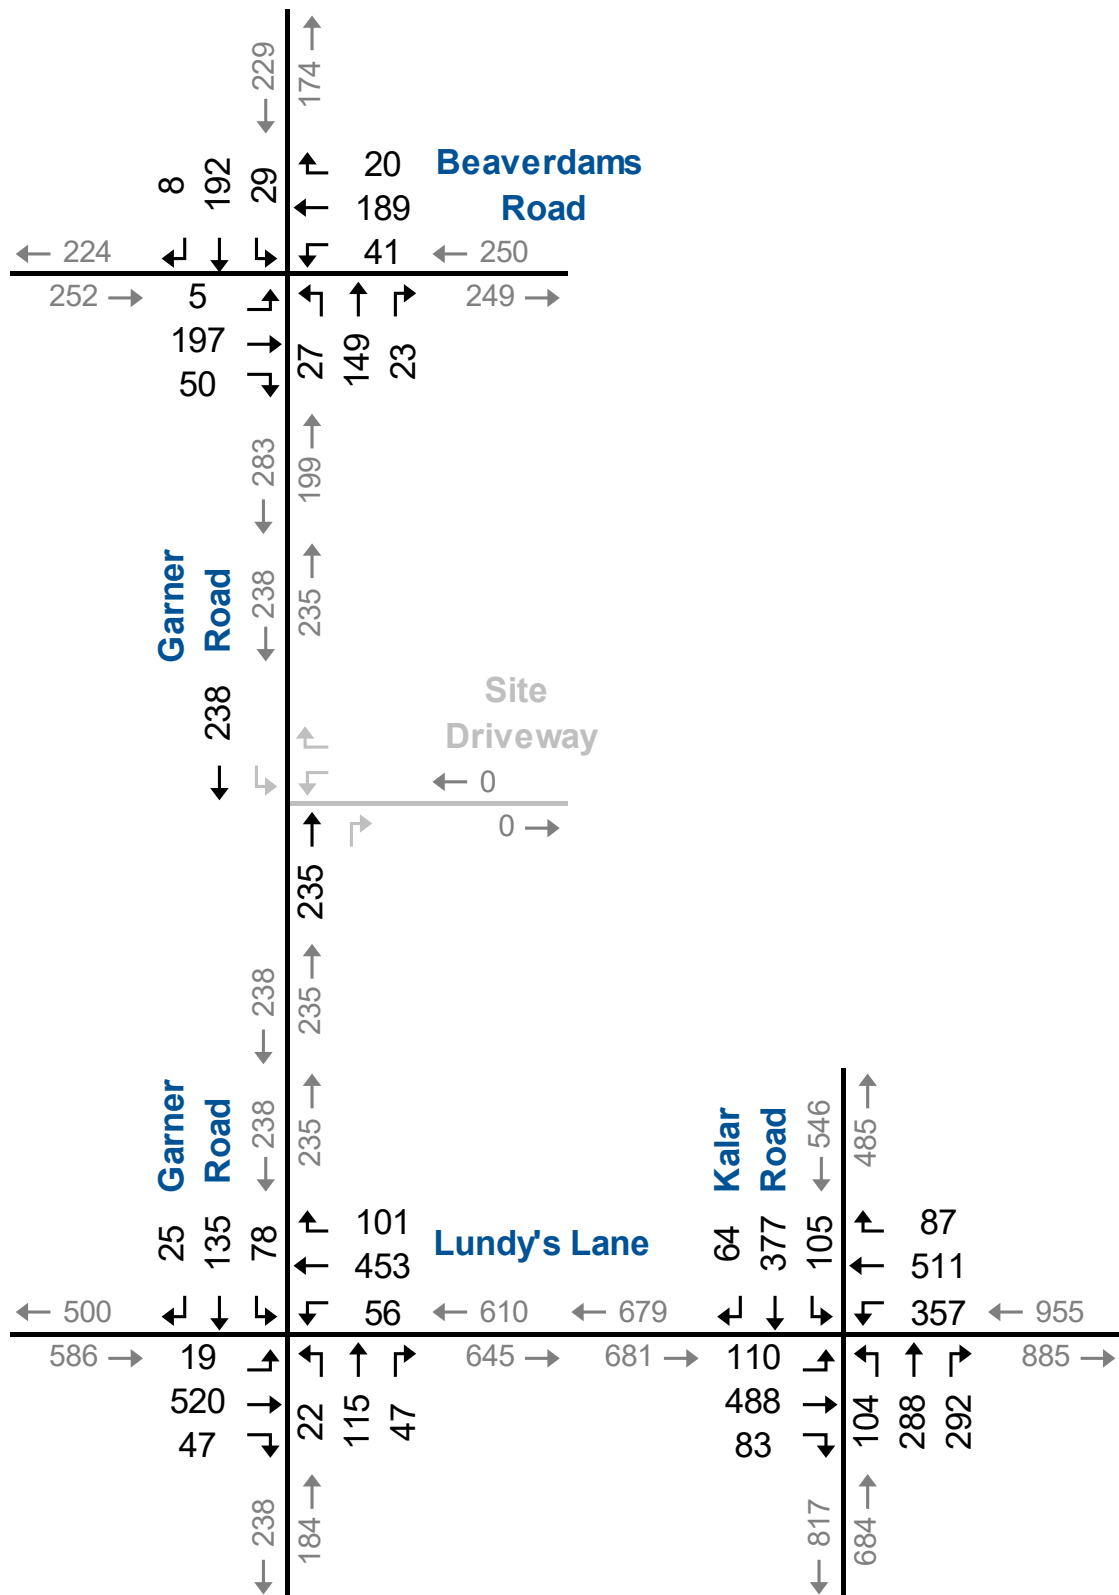

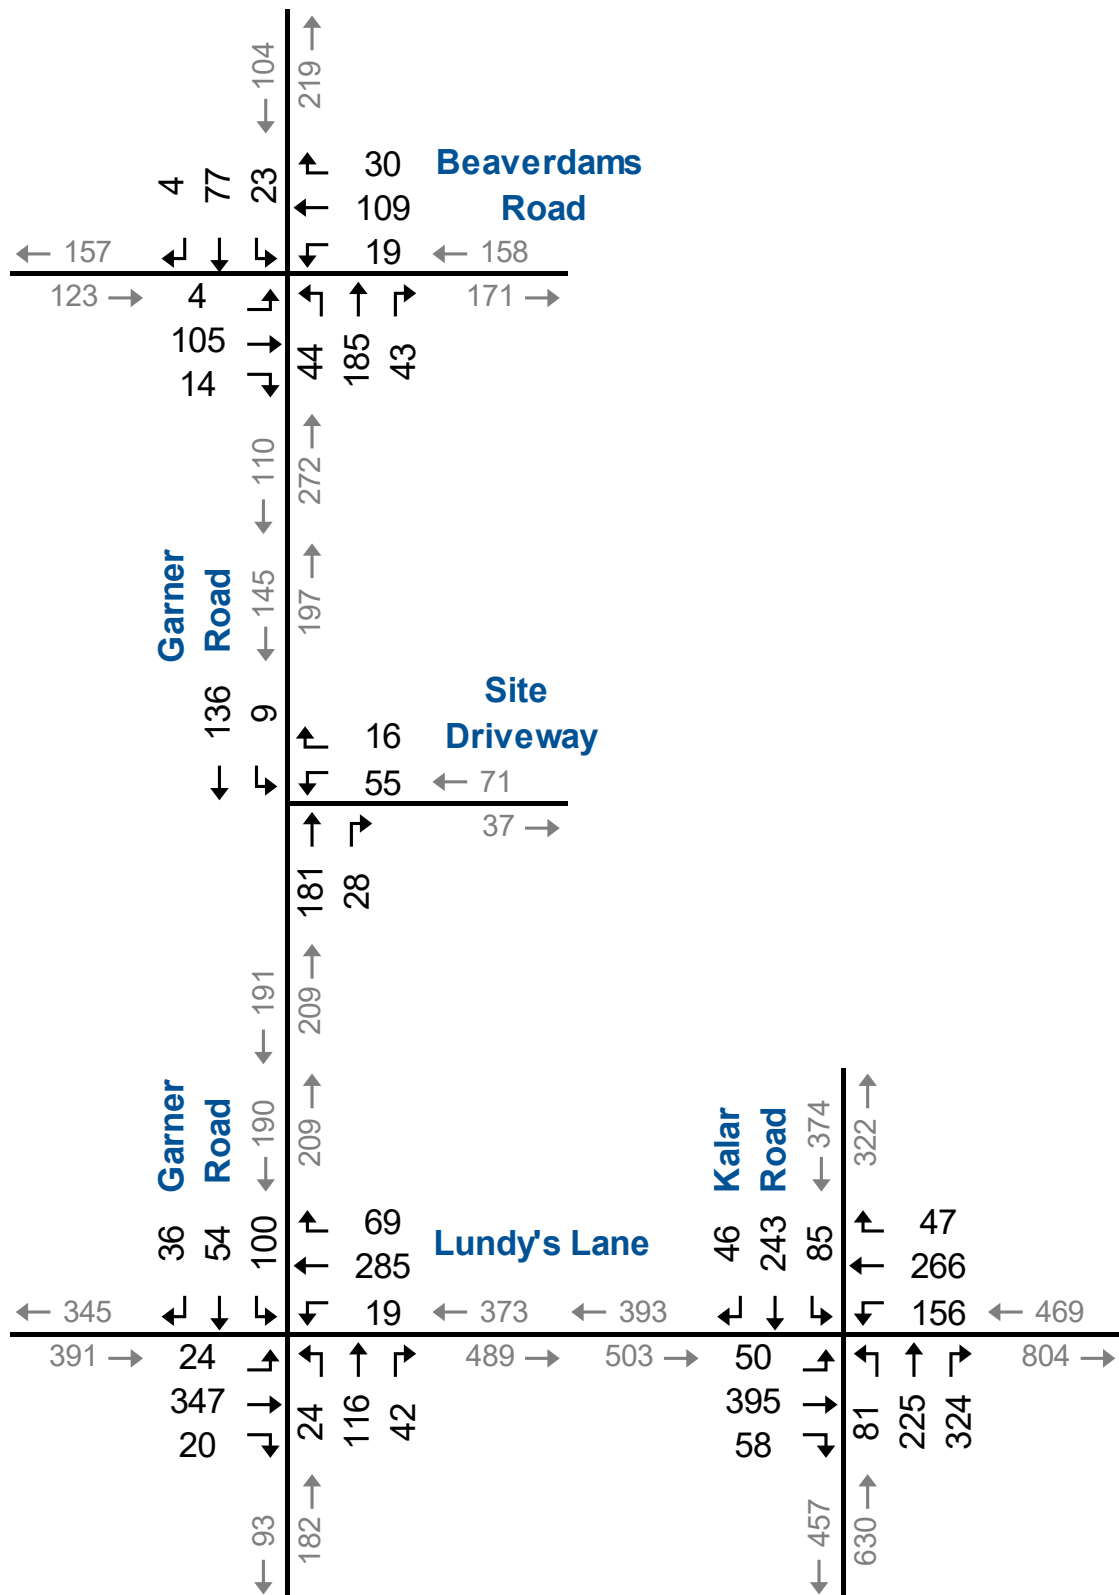

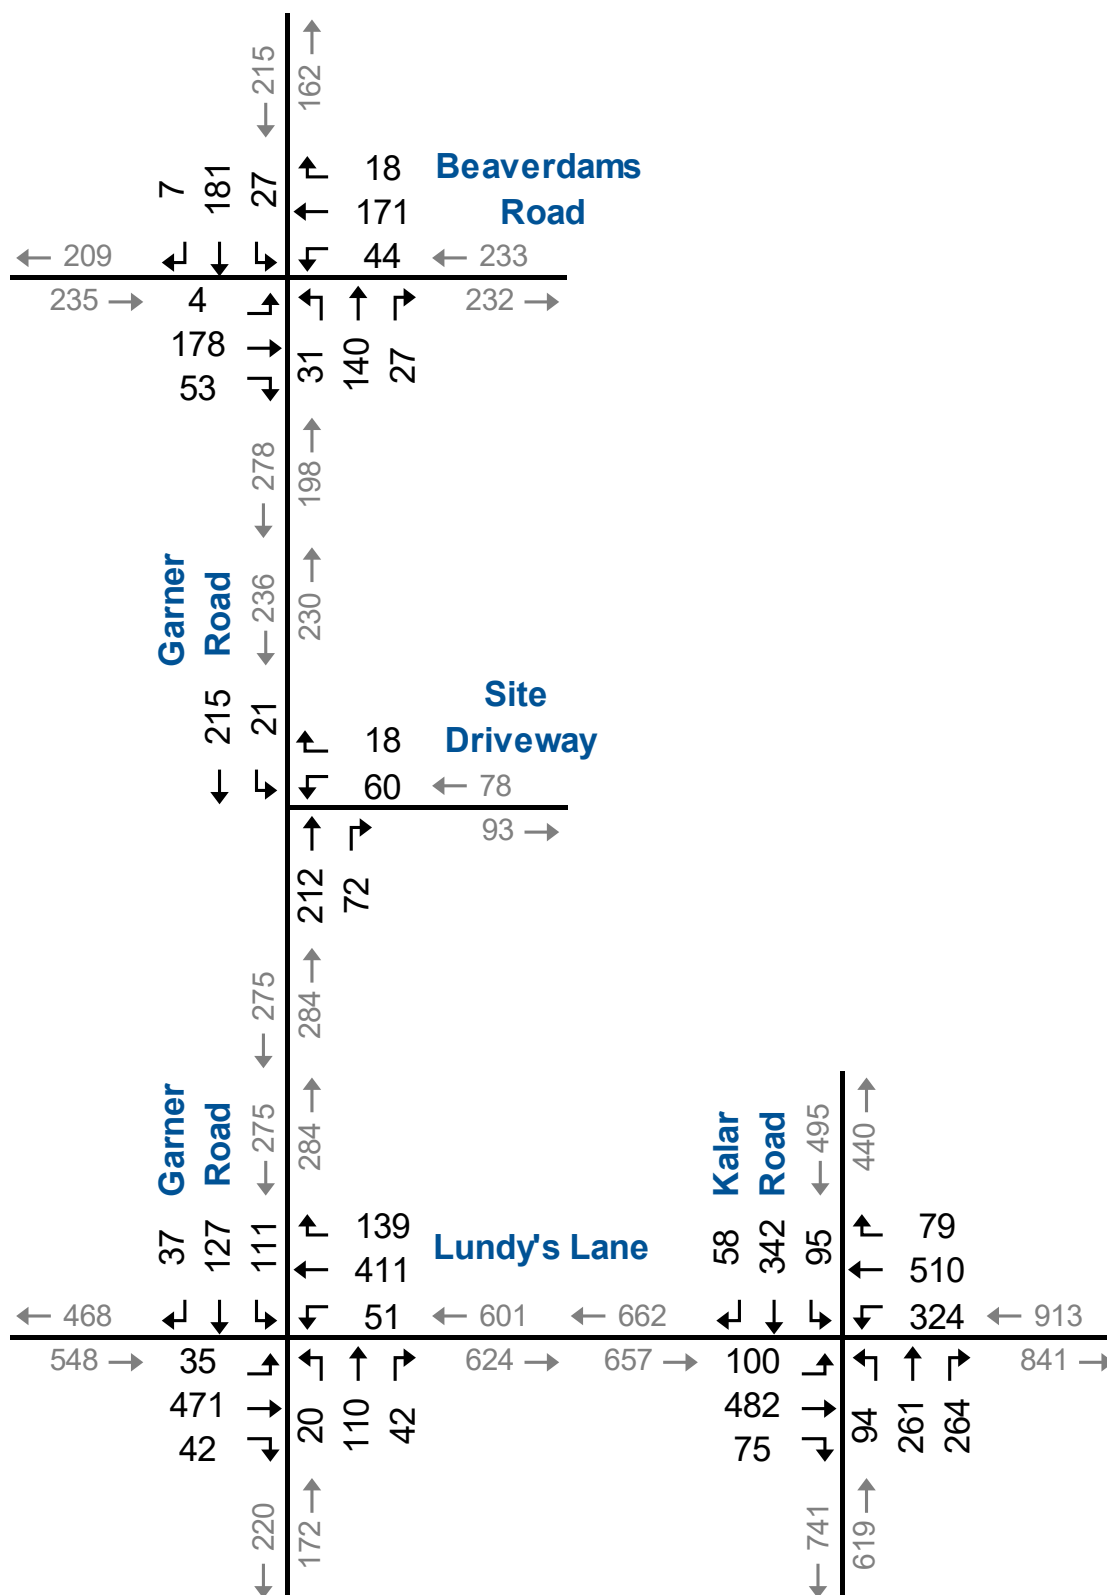

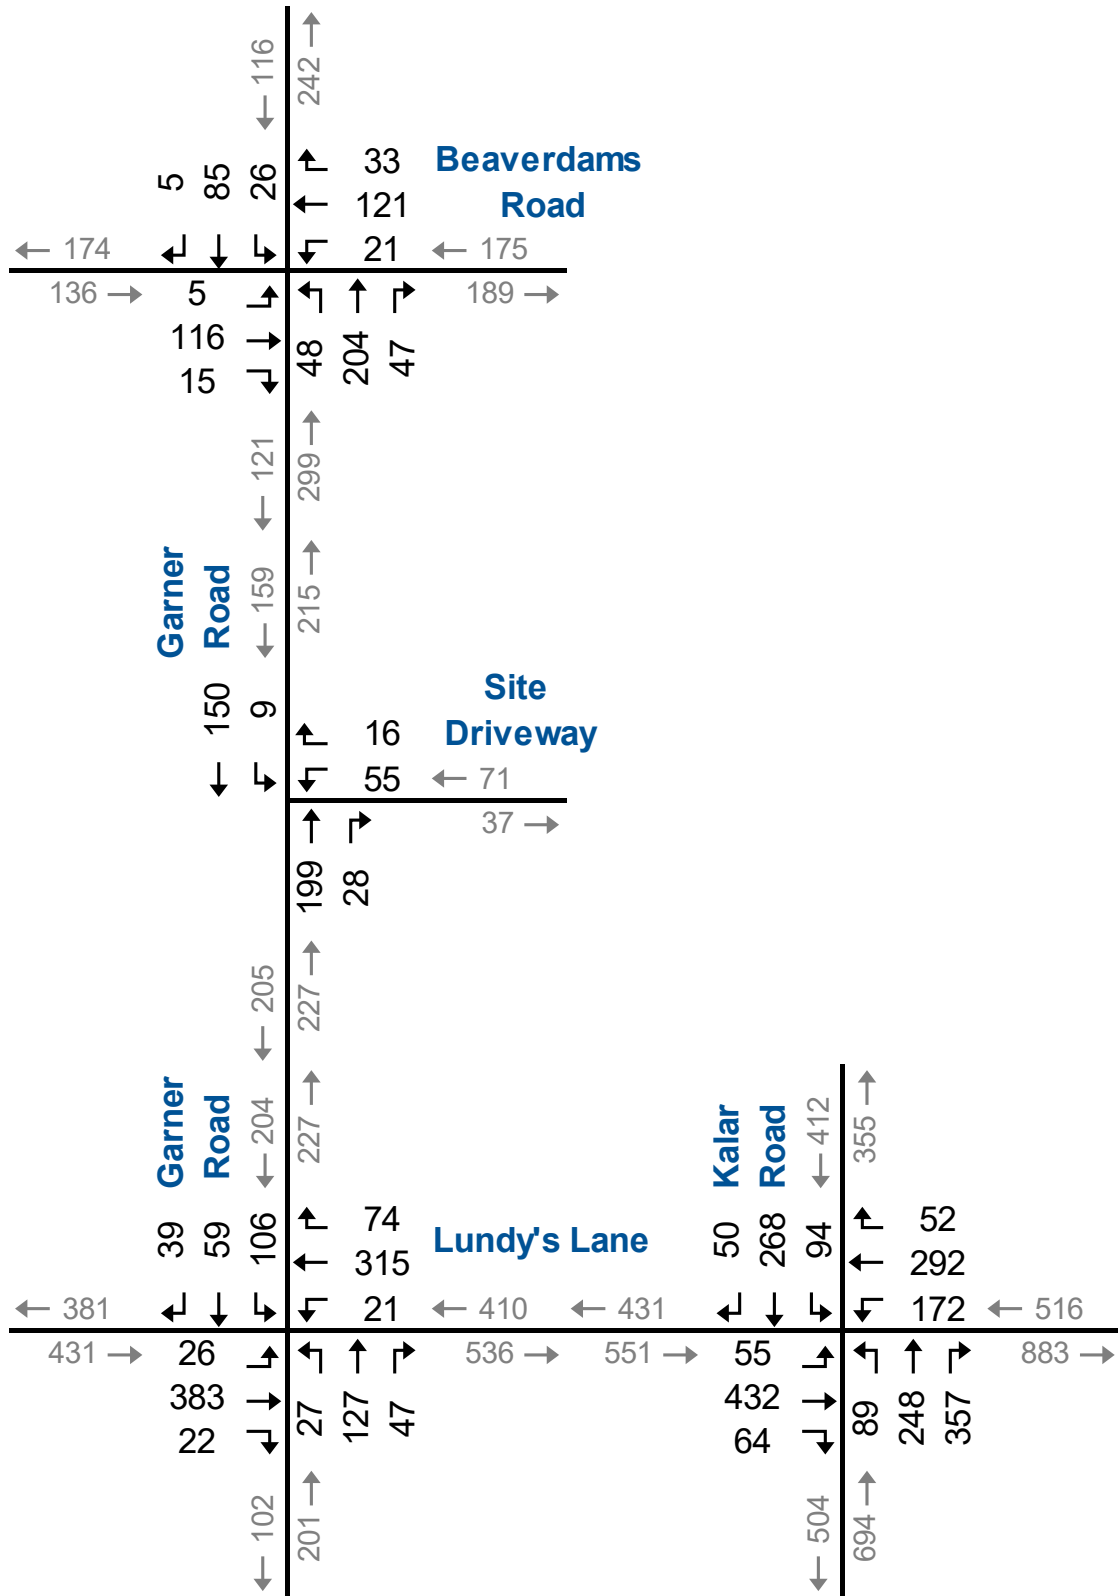

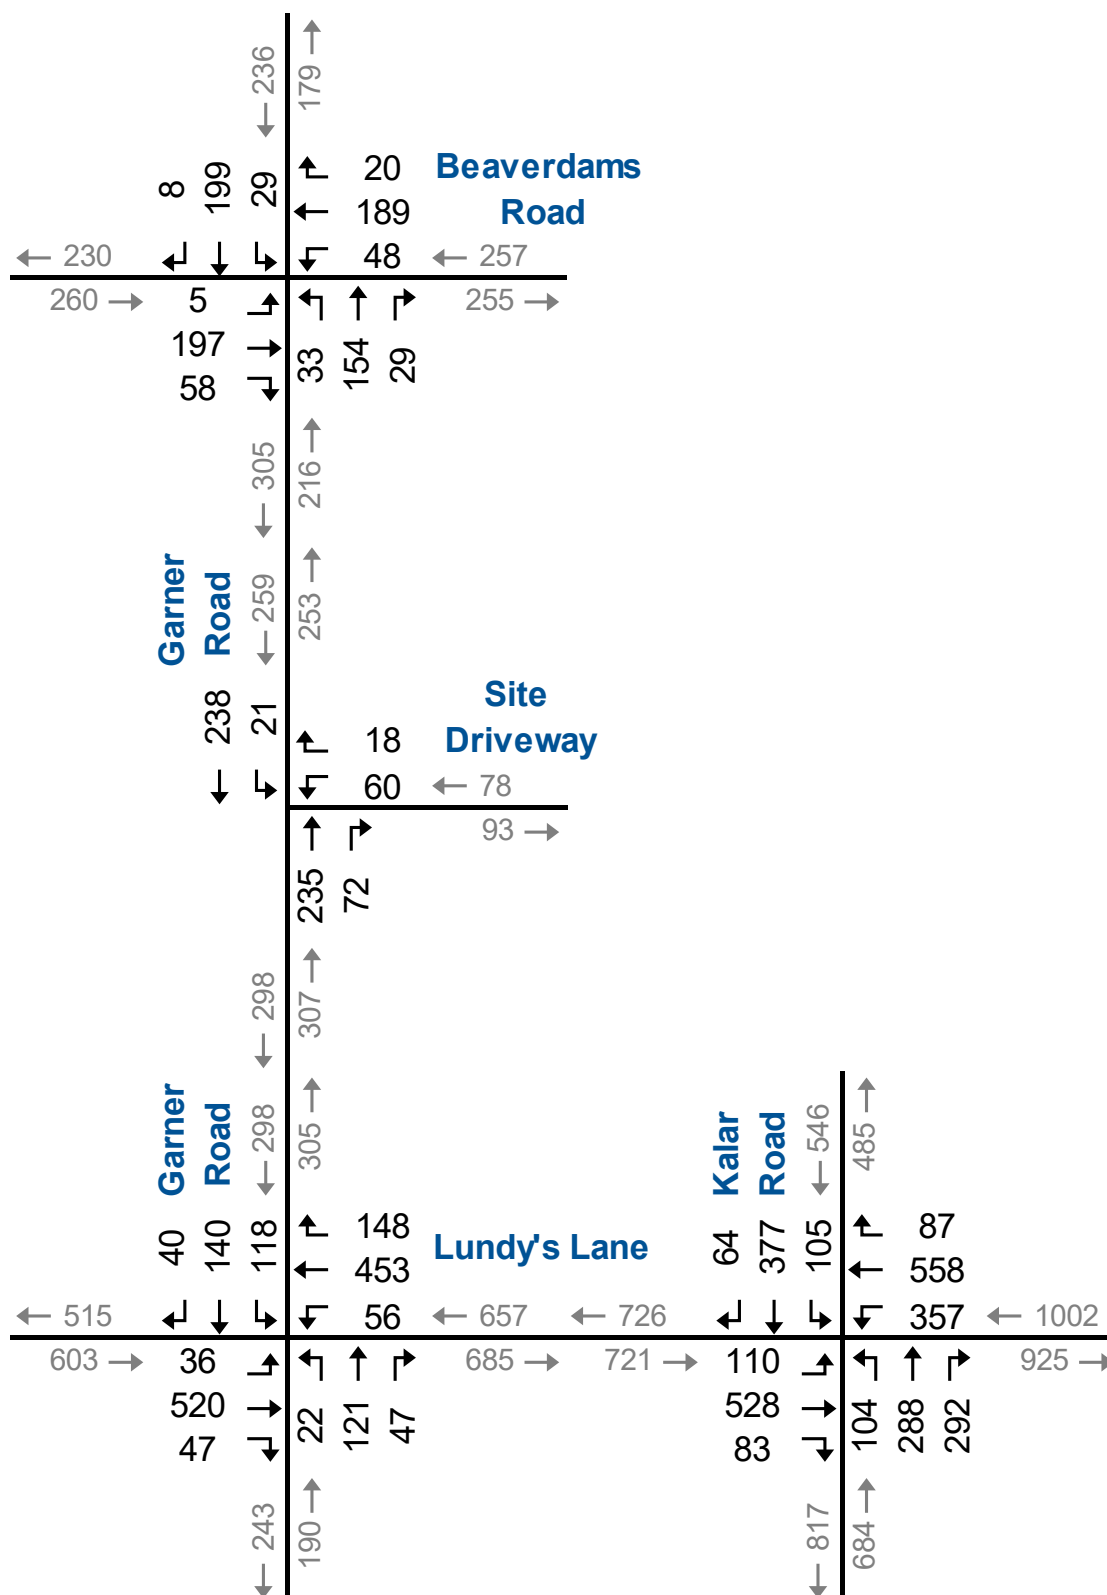

5 Operational Analysis

Measuring existing traffic volumes and projecting future traffic volumes quantifies traffic within the study area. To assess the quality of flow, roadway capacity analysis was conducted with respect to base year conditions and projected background and total conditions. The capacity analysis indicates how well the roadway facilities serve the traffic demands. Calculated levels of service classify roadway operating conditions.

5.1 Level of Service Criteria

Level of service (LOS) denotes the different operating conditions on a given roadway segment under various traffic volume loads. It is a qualitative measure that indexes the operational qualities of a roadway segment or an intersection with designations ranging from LOS A to F, with LOS A representing the best operating conditions and LOS F representing the worst operating conditions.

For unsignalized intersections, the analysis assumes that traffic on the mainline is not affected by the traffic on the side streets. The level of service is only determined for left turns from the main road and all movements from the minor street. Unsignalized intersections use conservative analysis parameters, such as high critical gaps. A "critical gap" is defined as the minimum time, in seconds, between successive major stream vehicles in which a minor-street vehicle can make a maneuver.

Actual field observations indicate that drivers on minor streets generally accept smaller gaps in traffic than those used in the analysis procedures and therefore experience less delay than reported by the analysis software. Consequently, the analysis results overstate the actual delays experienced in the field. For this reason, the results of the unsignalized intersection analyses should be considered conservative.



5.2 Intersection Capacity Analysis

The evaluation criteria for analyzing signalized and unsignalized intersections are based on the 2000 Highway Capacity Manual (HCM).² utilizing Synchro 11.

Table 5.1 summarizes the capacity analyses for the study area intersections for the base year and the 2030 future horizon years for the weekday AM, PM and Saturday peak hours, respectively. **Appendix D** includes the capacity analysis results.

5.2.1 Garner Road at Beaverdam Road

The all-way stop intersection currently operates at LOS B or better for all approaches during the weekday peak hours. With build-out of the proposed development, the intersection is expected to continue to operate at acceptable operations (i.e. LOC C or better).

5.2.2 Lundy's Lane at Garner Road

Individual movements at the signalized intersection presently operate at LOS C or better. Similar levels of operation are expected under future Background and Total traffic conditions with only a negligible increase in delay resulting from site-generated traffic volumes.

5.2.3 Lundy's Lane at Kalar Road

Individual movements at the signalized intersection presently operate at LOS D or better. Under 2030 Background and Total traffic conditions, the westbound left-turn movement is projected to operate at LOS E with a v/c ratio approaching 1.00 during the weekday PM peak hour.

The westbound left turn movement is projected to experience higher delays during the weekday PM peak hour caused by increased opposing volumes. However, it is recognized that the left-turn volume will not build a significant queue that would require a storage extension.

5.2.4 Garner Road at Site Driveway

As described previously, a single new all-turn driveway is proposed to provide access to the Development through Garner Road. Under future conditions with the full build-out of the development, the Site Driveway is expected to operate at LOS B or better during the critical peak hours studied.

² Transportation Research Board, Highway Capacity Manual, Washington, D.C. 2003.



TABLE 5.1A: WEEKDAY AM PEAK HOUR OPERATIONS

Analysis Period	Intersection	Control Type	Scenario	MOE	Direction / Movement / Approach																	
					Eastbound				Westbound				Northbound				Southbound				OVERALL	
					Left	Through	Right	Approach	Left	Through	Right	Approach	Left	Through	Right	Approach	Left	Through	Right	Approach		
AM Peak Hour	Beaversdam Road & Garner Road	AWSC	Existing	LOS Delay D/U 95th	< 10 >	A 0.21 >	A 10	< 10 >	A 0.23 >	A 10	< 11 >	B 0.41 >	B 11	< 9 >	A 0.17 >	A 9	B 10					
			2025 Background	LOS Delay D/U 95th	< 10 >	A 0.23 >	A 10	< 10 >	B 0.44 >	B 12	< 10 >	A 0.19 >	A 10	B 11								
			2025 Total	LOS Delay D/U 95th	< 10 >	A 0.24 >	B 10	< 10 >	B 0.26 >	B 10	< 13 >	B 0.48 >	B 13	< 10 >	A 0.20 >	A 10	B 11					
			2030 Background	LOS Delay D/U 95th	< 13 >	A 0.45 >	B 13	< 11 >	A 0.31 >	B 11	< 15 >	C 0.54 >	C 15	< 11 >	B 0.24 >	B 11	B 13					
			2030 Total	LOS Delay D/U 95th	< 11 >	A 0.28 >	B 11	< 11 >	A 0.30 >	B 11	< 14 >	C 0.54 >	B 14	< 10 >	A 0.23 >	B 10	B 12					
	Lundy's Lane & Garner Road	TCS	Existing	LOS Delay V/C 95th	B 18 0.14 5	C 20 0.54 29	> > >	C 20	B 19 0.23 5	B 20 0.50 26	> > >	B 20	A 7 0.05 4	A 7 0.18 16	> > >	A 7	A 7 0.13 9	A 7 0.09 8	> > >	A 7	B 16 0.28	
			2025 Background	LOS Delay V/C 95th	B 18 0.15 5	C 20 0.57 31	> > >	C 20	B 19 0.24 5	B 20 0.53 28	> > >	B 20	A 7 0.05 4	A 8 0.19 18	> > >	A 7	A 7 0.14 10	A 7 0.09 8	> > >	A 7	B 16 0.30	
			2025 Total	LOS Delay V/C 95th	B 19 0.21 7	C 20 0.57 31	> > >	C 20	B 19 0.24 5	B 20 0.54 28	> > >	C 20	A 7 0.05 4	A 8 0.19 18	> > >	A 7	A 8 0.22 15	A 7 0.11 9	> > >	A 8	B 16 0.32	
			2030 Background	LOS Delay V/C 95th	B 18 0.16 6	C 21 0.60 34	> > >	C 21	B 19 0.27 5	B 20 0.56 30	> > >	C 20	A 7 0.06 5	A 8 0.22 20	> > >	A 8	A 8 0.16 11	A 7 0.10 10	> > >	A 8	B 17 0.33	
			2030 Total	LOS Delay V/C 95th	B 19 0.23 8	C 21 0.60 34	> > >	C 21	B 19 0.27 5	B 20 0.57 31	> > >	C 20	A 7 0.06 5	A 8 0.22 21	> > >	A 8	A 9 0.24 16	A 7 0.12 10	> > >	A 8	B 16 0.35	
	Lundy's Lane & Kalar Road	TCS	Existing	LOS Delay V/C 95th	C 24 0.19 13	D 35 0.68 59	> > >	C 34	C 21 0.54 33	C 26 0.40 37	> > >	C 24	< 16 0.19 19	< 23 0.43 44	> > >	C 22	B 16 0.33 19	B 21 0.28 36	> > >	B 20	C 25 0.50	
			2025 Background	LOS Delay V/C 95th	C 25 0.20 14	D 36 0.71 64	> > >	D 36	C 23 0.58 35	C 27 0.42 40	> > >	C 26	< 17 0.21 20	< 26 0.48 51	> > >	C 24	B 16 0.35 20	C 22 0.29 40	> > >	C 20	C 27 0.55	
			2025 Total	LOS Delay V/C 95th	C 25 0.20 13	D 36 0.73 70	> > >	D 36	C 23 0.60 35	C 27 0.43 42	> > >	C 26	< 17 0.21 21	< 26 0.49 52	> > >	C 25	B 16 0.36 21	B 22 0.30 41	> > >	C 21	C 27 0.56	
			2030 Background	LOS Delay V/C 95th	C 26 0.22 15	D 37 0.74 72	> > >	D 37	C 24 0.64 38	C 27 0.44 44	> > >	C 26	< 18 0.24 23	< 29 0.56 63	> > >	C 27	B 18 0.43 24	C 24 0.33 47	> > >	C 22	C 28 0.61	
			2030 Total	LOS Delay V/C 95th	C 25 0.22 14	D 38 0.76 78	> > >	D 38	C 25 0.66 38	C 27 0.45 46	> > >	C 26	< 19 0.24 24	< 30 0.57 65	> > >	C 28	B 19 0.44 25	C 24 0.34 48	> > >	C 23	C 29 0.63	
	Site Driveway & Garner Road	TWSC	2025 Total	LOS Delay V/C 95th	< 11 >	A 0.12 >	A 11	< 11 >	B 0.12 >	B 11	< 0 >	A 0.13 >	A 0	< 1 >	A 0.01 >	A 1	A 2					
			2030 Total	LOS Delay V/C 95th	< 12 >	A 0.12 >	A 12	< 12 >	B 0.12 >	B 12	< 0 >	A 0.14 >	A 0	< 1 >	A 0.01 >	A 1	A 2					

MOE - Measure of Effectiveness
TCS - Traffic Control Signal
TWSC - Two-Way Stop Control
AWSC - All-Way Stop Control

LOS - Level of Service
D/U - Degree Utilization
V/C - Volume to Capacity Ratio
95th - 95th Percentile Queue Length

Ex. - Existing Storage (m)
Avail. - Available Storage (m)
> - Shared Right-Turn Lane
< - Shared Left-Turn Lane



TABLE 5.1B: WEEKDAY PM PEAK HOUR OPERATIONS

Analysis Period	Intersection	Control Type	Scenario	MOE	Direction / Movement / Approach																	
					Eastbound				Westbound				Northbound				Southbound				OVERALL	
					Left	Through	Right	Approach	Left	Through	Right	Approach	Left	Through	Right	Approach	Left	Through	Right	Approach		
AM Peak Hour	Beaversdam Road & Garner Road	AWSC	Existing	LOS Delay D/U 95th	< 13	B 0.40	> 13	< 13	B 0.43	> 13	< 12	B 0.36	> 12	< 13	B 0.44	> 13	< 13	B 0.44	> 13	< 13	B 0.44	> 13
			2025 Background	LOS Delay D/U 95th	< 14	B 0.45	> 14	< 14	B 0.47	> 14	< 13	B 0.39	> 13	< 15	B 0.49	> 15	< 15	B 0.49	> 15	< 15	B 0.49	> 15
			2025 Total	LOS Delay D/U 95th	< 15	B 0.47	> 15	< 16	B 0.50	> 16	< 14	B 0.44	> 14	< 16	B 0.52	> 16	< 16	B 0.52	> 16	< 16	B 0.52	> 16
			2030 Background	LOS Delay D/U 95th	< 17	C 0.53	> 17	< 18	C 0.56	> 18	< 15	C 0.47	> 15	< 18	C 0.58	> 18	< 18	C 0.58	> 18	< 18	C 0.58	> 18
			2030 Total	LOS Delay D/U 95th	< 18	C 0.57	> 18	< 20	C 0.60	> 20	< 17	C 0.53	> 17	< 20	C 0.62	> 20	< 20	C 0.62	> 20	< 20	C 0.62	> 20
	Lundy's Lane & Garner Road	TCS	Existing	LOS Delay V/C 95th	B 18 0.15 5	C 21 0.64 38	> 21	B 19 0.32 13	C 22 0.65 39	> 22	A 7 0.04 5	A 8 0.19 18	> 8	A 8 0.13 12	A 8 0.20 19	> 8	A 8 0.13 12	A 8 0.20 19	> 8	A 8 0.13 12	A 8 0.20 19	
			2025 Background	LOS Delay V/C 95th	B 18 0.16 5	C 21 0.65 41	> 21	B 19 0.35 13	C 22 0.67 42	> 22	A 8 0.04 5	A 9 0.20 20	> 9	A 9 0.15 13	A 9 0.21 21	> 9	A 9 0.15 13	A 9 0.21 21	> 9	A 9 0.15 13	A 9 0.21 21	
			2025 Total	LOS Delay V/C 95th	B 19 0.38 10	C 21 0.63 41	> 21	B 19 0.34 13	C 22 0.69 43	> 22	A 8 0.05 5	A 9 0.21 22	> 9	A 10 0.23 24	A 10 0.25 24	> 10	A 10 0.23 24	A 10 0.25 24	> 10	A 10 0.23 24	A 10 0.25 24	
			2030 Background	LOS Delay V/C 95th	B 17 0.19 6	C 21 0.68 45	> 21	B 19 0.41 15	C 22 0.70 47	> 22	A 8 0.05 6	A 10 0.23 23	> 10	A 9 0.17 15	A 10 0.24 24	> 9	A 10 0.17 15	A 10 0.24 24	> 10	A 10 0.17 15	A 10 0.24 24	
			2030 Total	LOS Delay V/C 95th	B 20 0.42 10	C 21 0.65 45	> 21	B 19 0.39 14	C 22 0.71 49	> 22	A 9 0.05 6	A 10 0.24 26	> 10	A 11 0.26 23	A 11 0.28 29	> 11	A 11 0.26 23	A 11 0.28 29	> 11	A 11 0.26 23	A 11 0.28 29	
	Lundy's Lane & Kalar Road	TCS	Existing	LOS Delay V/C 95th	C 27 0.42 20	D 43 0.78 81	> 43	D 38 0.86 70	C 31 0.60 72	> 31	< 20 0.36 24	C 30 0.43 54	> 30	< 21 0.32 26	C 31 0.45 63	> 31	< 21 0.32 26	C 31 0.45 63	> 31	< 21 0.32 26	C 31 0.45 63	
			2025 Background	LOS Delay V/C 95th	C 27 0.44 22	D 43 0.80 86	> 43	D 44 0.90 81	C 31 0.61 78	> 31	< 22 0.40 26	C 32 0.47 61	> 32	< 23 0.35 28	C 33 0.49 69	> 33	< 23 0.35 28	C 33 0.49 69	> 33	< 23 0.35 28	C 33 0.49 69	
			2025 Total	LOS Delay V/C 95th	C 27 0.45 21	D 43 0.82 93	> 43	D 48 0.92 88	C 31 0.64 86	> 31	< 23 0.41 27	C 33 0.48 63	> 33	< 24 0.37 29	C 34 0.50 70	> 34	< 24 0.37 29	C 34 0.50 70	> 34	< 24 0.37 29	C 34 0.50 70	
			2030 Background	LOS Delay V/C 95th	C 28 0.49 23	D 43 0.83 96	> 43	D 63 0.98 117	C 31 0.63 88	> 31	< 25 0.50 30	C 37 0.57 73	> 37	< 26 0.45 32	C 38 0.58 78	> 38	< 26 0.45 32	C 38 0.58 78	> 38	< 26 0.45 32	C 38 0.58 78	
			2030 Total	LOS Delay V/C 95th	C 28 0.50 23	D 43 0.85 104	> 43	D 68 0.99 126	C 31 0.65 98	> 31	< 27 0.51 30	C 39 0.58 73	> 39	< 27 0.46 32	C 40 0.59 78	> 40	< 27 0.46 32	C 40 0.59 78	> 40	< 27 0.46 32	C 40 0.59 78	
	Site Driveway & Garner Road	TWSC	2025 Total	LOS Delay V/C 95th	< 13	< 0.16	> 13	< 13	< 0.16	> 13	- 0	- 0.18	> 0	< 1	< 0.02	> 1	< 1	< 0.02	> 1	< 1	< 0.02	> 1
			2030 Total	LOS Delay V/C 95th	< 14	< 0.17	> 14	< 14	< 0.17	> 14	- 0	- 0.20	> 0	< 1	< 0.02	> 1	< 1	< 0.02	> 1	< 1	< 0.02	> 1

MOE - Measure of Effectiveness
TCS - Traffic Control Signal
TWSC - Two-Way Stop Control
AWSC - All-Way Stop Control

LOS - Level of Service
D/U - Degree Utilization
V/C - Volume to Capacity Ratio
95th - 95th Percentile Queue Length

Ex. - Existing Storage (m)
Avail. - Available Storage (m)
> - Shared Right-Turn Lane
< - Shared Left-Turn Lane



6 Mitigation Measures

As summarized in the analysis tables in the previous chapter, the study area intersections are not projected to experience any operational deficiencies. The analysis also concludes that the development would have minimal impact on study area traffic conditions.

This chapter summarizes the results of the investigation to identify if improvement measures are required to accommodate the impacts of the proposed development.

6.1 Left Turn Lanes

The proposed driveway connection was assessed to determine whether future traffic volumes warrant a left-turn lane along the major roadway.

The left-turn lane warrants follow the Ministry of Transportation's (MTO) Geometric Design Standards³ requirements. A design speed of 20 kilometres per hour over the posted and assumed speed limit had been utilized. **Table 6.1** summarizes the results of the left-turn lane warrant analyses. The percentages of left-turning vehicles in the approaching volume were rounded to the nearest 5 percent, as nomographs are only provided for 5 percent increments. **Appendix E** contains the nomographs. The following is noted:

- ▶ A southbound left turn lane at Garner Road and the Site Driveway is not warranted under the 2030 Total conditions.

TABLE 6.1: LEFT-TURN LANE ANALYSIS (2030)

Garner Road at Site Driveway		
Approach Direction Design Speed	Southbound 80 km/h	
Peak Hour	AM	PM
Advancing Volume	159	259
Opposing Volumes	227	307
Left Turning Traffic	9	21
% of Left Turning Traffic	5.7%	8.1%
Figure Used*	9A-14 (10%)	9A-14 (10%)
Warranted	No	No
Storage Length Required	N/A	N/A

Based on MTO Design Supplement for TAC Geometric Design Guide for Canadian Road - June 2017

³ MTO Design Supplement for TAC Geometric Design Guide for Canadian Road, 2017



6.2 Right Turn Lane

The proposed driveway connection to Garner Road was assessed to determine if the projected traffic volumes warrant the installation of a right-turn lane along the major roadway.

Although right turns are generally made more efficiently than left turn movements, exclusive right turn lanes are often provided for many of the same reasons left turn lanes are provided.

MTO guidelines (Geometric Design Standards for Ontario Highways) note that right-turn lanes or tapers may be considered where right-turn volumes exceed 60 vehicles per hour (vph) and where right-turning vehicles create a hazard or reduce capacity at the intersection. The forecast right turn movement at Garner Road and the Site Driveway indicates a right turn movement of 28 vehicles during the weekday AM peak hour and 72 vehicles during the weekday PM peak hour.

However, if right-turn lanes were implemented at these intersections, the change in the level of service for the affected traffic would be negligible as it currently operates at LOS A. As no significant operational benefits are expected with implementing separate right turn lanes, a northbound right turn lane along Garner Road at the Site Driveway is not recommended.

6.3 Sight Distance Evaluation

Paradigm conducted a sight distance evaluation for the proposed roadway connections to Garner Road following the Transportation Association of Canada (TAC) guidelines.

Paradigm generally utilizes a design speed of 20 km/h over the posted speed to provide a conservative analysis in rural environments. The sight distance analysis was based on this assumption along Garner Road.

Table 6.2 shows the available stopping sight distance from the north and south of the Site Driveway. The measurements indicate that the proposed Site Driveway is adequately spaced from a sight-distance perspective.

TABLE 6.2: SIGHT DISTANCE

Location	SSD (metres)	
	Required ^a	Measured ^b
Garner Road at Site Driveway		
To/From the North	130	130+
To/From the South	130	130+

^a Based on guidelines established in the Geometric Design Guide for Canadian Roads, Transportation Association of Canada (TAC), 2017 for the operating speed of 80

^b Field measurements taken by Paradigm

+ Field measurement exceeds what listed



7 Transportation Demand Management

Based on best practices and policy objectives, there is merit for a further reduction through a Transportation Demand Management (TDM) program.

A Transportation Demand Management (TDM) plan aims to reduce the development's overall traffic and parking impacts by implementing strategies to affect the demand side of the transportation equation. TDM strategies include incentives and disincentives that increase people's likelihood of changing travel behaviour. Strategies include financial incentives, time incentives, new or enhanced commuter services, information dissemination, and alternative marketing services.

The TDM plan has been formulated to extend reasonable and practical strategies that encourage residents and visitors to take alternative modes of transportation. The strategies identified are expected to improve transportation access and connectivity within the development and reset of the study area.

7.1 Proposed Strategies

The development will implement the proposed strategies identified herein to reduce the number of auto-trips made to/from the Development:

7.1.1 Transportation Information

The Applicant will develop marketing/informational materials as part of their initial scope of work. Information on transportation options and links to the appropriate website should be conveyed to all prospective residents as a component of a resident welcome packet.

Available information should include schedules for local and regional transit services, bicycle and trail networks and the location of retail and recreational establishments.

7.1.2 Unbundled Parking

Implementing a paid-parking operation is one of the most effective TDM strategies for encouraging alternative travel habits. Occupants are not forced to pay for parking they do not need and allow consumers to adjust their parking supply to reflect their needs. To further encourage residents of the apartment building to utilize sustainable travel modes, the development will enable residents to opt out of purchasing their parking space, providing a discount on the purchase price.

The development will consider the use of unbundled parking. This is an essential factor as residents are notified at the project's onset that parking is proposed to be provided as an additional cost instead of the price to rent a unit. If residents are significantly considering changing their travel behaviour, the cost of renting a parking space could contribute to this change.



7.1.3 Bicycle Parking

The Applicant will promote travel to the site by biking by providing convenient bicycle amenities. It is unclear at this time how many bicycle spaces are proposed; however, based on best practices should include a minimum of 0.50 long-term and 0.05 short-term spaces per unit.



8 Conclusions

8.1 Conclusions

This study evaluated the impacts of background traffic growth and the proposed development of 192 residential units and 14,364 square feet of commercial space. Full build-out is expected at or before 2025 for this report.

A new driveway connection proposes access to the Development through Garner Road. The connection is located at the northern terminus of the property. The proposed new Site Driveway will be designed with adequate width to provide for reasonable entry and exit from the development and accommodate emergency response vehicles; the proposed locations afford safe sight lines for all turning movements and approaches.

The development is projected to generate approximately 108-171 new vehicle trips during the weekday AM and PM peak hours.

Detailed traffic analysis was conducted for each study area intersection under existing traffic conditions and 2025 and 2030 background and total traffic conditions. Based on traffic data and analyses completed, the study area's intersections presently operate at a level of service (LOS) C or better during the weekday peak hours. LOS D or better is generally considered a well-functioning intersection in urban environments. With additional trips generated by the development, the impact on the study area's intersections is expected to be minimal as the intersections are forecast to continue to operate at LOS D or better.

The exception is the westbound left turn movement at the intersection of Lundy's Lane and Kalar Road. Increased delay is projected during the weekday PM peak hour under the 2030 Background and Total horizon caused by increased opposing volumes. However, it is recognized that the left-turn volume will not build a significant queue that would require a storage extension.

The analysis has further determined that an auxiliary left turn lane is not warranted under 2030 Total Horizon along Garner Road at the Site Driveway. Additionally, an auxiliary right turn lane is not recommended as it would offer no tangible benefits in traffic operations.

Overall, the study finds that development-generated traffic should not significantly impact traffic operations within the study area and that the existing transportation infrastructure in the area can adequately accommodate the traffic volumes projected to be generated by the proposed development.



8.2 Recommendations

Based on the findings of this study, it is recommended that:

- ▶ That the Region and City monitor the future traffic volumes at the intersection of Lundy's Lane with Garner Road and Kalar Road and adjust signal timings as needed to correspond to changing traffic volumes; and
- ▶ The development implements a Transportation Demand Management program that will include the following at a minimum:
 - Transportation Information Package
 - Unbundled Parking
 - Bicycle Parking supply



Appendix A

Pre-Study Consultation



Adam Makarewicz

To: Linda Ford
Subject: RE: (Q220571) RE: 8885-8911 Lundy's Lane - RFP + Timelines (Paradigm)

We have been asked to prepare a quote to complete a traffic impact study for the proposed development located at 8885-8911 Lundy's Lane (site plan attached, for reference only). I would like to confirm the scope items below.

- 1) *Intersections Analysed:*
Garner Road / Site Access; and
Garner Road / Lundy's Lane; and
c. Garner/Beaverdams
- 2) *Analysis Horizon Years*
 - a. Existing year (2022);*
 - b. Horizon: opening year*
 - c. 5-year horizon, post opening*
- 3) *Analysis Period*
 - a. Weekday morning (7:00am to 9:00am); and*
 - b. Weekday afternoon (4:00pm to 7:00pm);*
- 4) *Traffic Generation*
 - a. Based on ITE trip generation data rates*
- 5) *Background Traffic Volumes*
 - a. Based on the Region's Traffic Impact Study Guidelines (2%); plus*
 - b. Additional traffic generated by adjacent developments. There are no background developments to add*
- 6) *Sight Distance*
 - a. Review proposed site access driveways.*
- 7) *Driveway(s)*
Please perform a RT/LT lane warrant, per MTO guidelines
- 8) *TDM/Transit*
Provide commentary on existing transit service, and TDM measures the developer is willing to put in place

John Grubich, C.E.T. | Traffic Planning Supervisor | Municipal Works - Transportation Services | City of Niagara Falls
8208 Heartland Forest Road | Niagara Falls, ON L2H 0L7 | (905) 356-7521 ext 5214 | Fax 905-356-5576 | jgrubich@niagarafalls.ca

Adam Makarewicz

To: Dunsmore, Susan
Subject: RE: 8885-8911 Lundy's Lane - TIS Scope

From: Dunsmore, Susan <Susan.Dunsmore@niagararegion.ca>
Sent: Monday, September 12, 2022 1:59 PM
To: Maitham Dinani <maitham.dinani@jdengineering.ca>
Cc: John Grubich <jgrubich@niagarafalls.ca>
Subject: RE: 8885-8911 Lundy's Lane - TIS Scope

Hi Maitham,

Transportation planning has reviewed your TIS scope and has provided the comments below in green. If you require regional traffic data – requests are to be submitted through our website using the following link: <https://www.niagararegion.ca/living/roads/permits/traffic-data-requests.aspx>.

If there are any improvements required on Regional roads or at the intersection a functional design is to be included in the TIS.

If you require anything further please contact the undersigned at your convenience.

Thank you

Susan M. Dunsmore, P. Eng.
Manager, Development Engineering
Planning and Development Services

Phone: (905) 980-6000 or 1-800-263-7215 ext 3661
Address: 1815 Sir Isaac Brock Way, Thorold ON, L2V4T7



From: Maitham Dinani <maitham.dinani@jdengineering.ca>
Sent: Tuesday, September 06, 2022 10:28 AM
To: John Grubich <jgrubich@niagarafalls.ca>; Dunsmore, Susan <Susan.Dunsmore@niagararegion.ca>
Subject: 8885-8911 Lundy's Lane - TIS Scope

CAUTION EXTERNAL EMAIL: This email originated from outside of the Niagara Region email system. Use caution when clicking links or opening attachments unless you recognize the sender and know the content is safe.

Good morning,

We have been asked to prepare a quote to complete a traffic impact study for the proposed development located at 8885-8911 Lundy's Lane (site plan attached, for reference only). I would like to confirm the scope items below.

- 1) Intersections Analysed:
 - a. Garner Road / Site Access; and
 - b. Garner Road / Lundy's Lane; and
 - c. **Lundy's Lane/Kalar Rd**
 - 2) Analysis Horizon Years
 - a. Existing year (2022);
 - b. **5-year horizon (2027); Build-out year. If the development is being phased, the TIS to include an estimated timeframe for the build-out of the various phases and analyze the study area at each phase.**
 - c. **5-year horizon after full development occupancy.**
 - 3) Analysis Period
 - a. Weekday morning (7:00am to 9:00am); and
 - b. Weekday afternoon (4:00pm to 7:00pm);
 - 4) Traffic Generation
 - a. Based on ITE trip generation data rates
 - 5) Background Traffic Volumes
 - a. Based on the Region's Traffic Impact Study Guidelines (2%); plus
 - b. Additional traffic generated by adjacent developments.
 - 6) Sight Distance
 - a. Review proposed site access driveways.
- **The Consultant to follow Niagara Region Guidelines for TIS (2012) for traffic analysis software settings, intersections capacity thresholds and other requirements.**
 - **For the ideal saturation flows, there are currently new saturation flow rates (shown below) that will be a part of the new TIS Guidelines. The Consultant can either use the new sat values or 1750 across the board for all movements.**

Variable	Saturation Flow Rate (pc/h/ln) -Niagara Falls
T	1,579
L	1,454
LT	1,178
LL	2,144
R	1,301
RT	1,338
LTR	1,433

Appendix B

Traffic Data





Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsl.com

Count Name: Garner Road & Beaverdams Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 1

Turning Movement Data

Start Time	Beaverdams Road Eastbound						Beaverdams Road Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
7:00 AM	1	14	1	0	0	16	0	18	4	0	0	22	5	10	0	0	0	15	2	4	2	0	0	8	61
7:15 AM	0	13	1	0	0	14	2	22	5	0	0	29	10	16	4	0	0	30	2	8	1	0	0	11	84
7:30 AM	1	22	6	0	0	29	4	32	11	0	0	47	9	35	5	0	0	49	1	17	0	0	0	18	143
7:45 AM	3	28	5	0	0	36	4	27	7	0	0	38	4	44	8	0	0	56	5	21	1	0	0	27	157
Hourly Total	5	77	13	0	0	95	10	99	27	0	0	136	28	105	17	0	0	150	10	50	4	0	0	64	445
8:00 AM	0	27	2	0	0	29	3	28	4	0	0	35	9	49	13	0	0	71	7	13	1	0	0	21	156
8:15 AM	0	20	1	0	0	21	4	20	8	0	0	32	13	34	3	0	0	50	4	20	0	0	0	24	127
8:30 AM	1	24	2	0	0	27	4	28	9	0	0	41	10	43	11	0	0	64	6	16	2	0	0	24	156
8:45 AM	1	22	1	0	0	24	9	21	5	0	0	35	11	33	14	0	0	58	1	18	1	0	0	20	137
Hourly Total	2	93	6	0	0	101	20	97	26	0	0	143	43	159	41	0	0	243	18	67	4	0	0	89	576
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
11:00 AM	0	17	6	0	0	23	4	19	0	0	0	23	5	23	4	0	0	32	4	10	1	0	0	15	93
11:15 AM	0	25	1	0	0	26	1	19	7	0	0	27	2	25	1	0	0	28	5	20	0	0	0	25	106
11:30 AM	0	18	4	0	0	22	3	21	3	0	0	27	5	18	4	0	0	27	6	18	0	0	0	24	100
11:45 AM	0	25	4	0	0	29	2	29	5	0	0	36	5	12	4	0	0	21	2	9	0	0	2	11	97
Hourly Total	0	85	15	0	0	100	10	88	15	0	0	113	17	78	13	0	0	108	17	57	1	0	2	75	396
12:00 PM	1	22	5	0	0	28	6	23	8	0	0	37	3	26	4	0	0	33	0	13	0	0	0	13	111
12:15 PM	0	14	5	0	0	19	3	20	4	0	0	27	8	14	1	0	0	23	7	25	3	0	0	35	104
12:30 PM	3	22	4	0	0	29	7	27	4	0	0	38	3	24	2	0	0	29	6	19	3	0	0	28	124
12:45 PM	0	26	6	0	0	32	1	18	4	0	0	23	3	25	2	0	0	30	6	25	1	0	0	32	117
Hourly Total	4	84	20	0	0	108	17	88	20	0	0	125	17	89	9	0	0	115	19	82	7	0	0	108	456
1:00 PM	0	24	6	0	0	30	6	19	6	0	0	31	3	22	6	0	0	31	0	18	2	0	0	20	112
1:15 PM	0	22	5	0	0	27	1	29	2	0	0	32	8	13	6	0	0	27	6	22	0	0	0	28	114
1:30 PM	2	14	2	0	0	18	6	23	6	0	0	35	1	28	3	0	0	32	7	18	0	0	0	25	110
1:45 PM	0	21	3	0	0	24	3	18	5	0	0	26	2	18	8	0	0	28	4	14	0	0	0	18	96
Hourly Total	2	81	16	0	0	99	16	89	19	0	0	124	14	81	23	0	0	118	17	72	2	0	0	91	432
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3:00 PM	1	19	4	0	0	24	10	33	5	0	0	48	11	40	13	0	0	64	4	24	0	0	0	28	164
3:15 PM	2	30	11	0	0	43	4	37	8	0	0	49	7	23	6	0	0	36	7	30	2	0	0	39	167
3:30 PM	2	42	13	0	0	57	7	32	2	0	0	41	6	33	4	0	0	43	5	28	2	0	0	35	176
3:45 PM	1	43	14	0	0	58	7	28	4	0	0	39	5	26	11	0	0	42	7	30	0	0	0	37	176
Hourly Total	6	134	42	0	0	182	28	130	19	0	0	177	29	122	34	0	0	185	23	112	4	0	0	139	683
4:00 PM	2	30	6	0	0	38	7	27	5	0	0	39	6	25	12	0	0	43	7	32	0	0	0	39	159
4:15 PM	1	41	6	0	0	48	18	38	6	0	0	62	5	15	7	0	0	27	6	33	1	0	0	40	177
4:30 PM	1	39	11	0	0	51	7	33	7	0	0	47	5	41	6	0	0	52	8	29	1	0	0	38	188


4:45 PM	1	40	9	0	0	50	10	37	3	0	0	50	6	28	7	0	0	41	4	43	2	0	0	49	190
Hourly Total	5	150	32	0	0	187	42	135	21	0	0	198	22	109	32	0	0	163	25	137	4	0	0	166	714
5:00 PM	1	50	11	0	0	62	11	48	4	0	0	63	6	36	3	0	0	45	8	35	1	0	0	44	214
5:15 PM	1	39	12	0	0	52	7	43	3	0	0	53	6	22	4	0	0	32	5	57	3	0	0	65	202
5:30 PM	0	32	7	0	0	39	7	31	4	0	0	42	7	32	7	0	0	46	5	31	1	0	0	37	164
5:45 PM	0	33	5	0	0	38	3	27	6	0	0	36	8	22	6	0	0	36	4	29	0	0	0	33	143
Hourly Total	2	154	35	0	0	191	28	149	17	0	0	194	27	112	20	0	0	159	22	152	5	0	0	179	723
Grand Total	26	858	179	0	0	1063	171	875	164	0	0	1210	197	855	189	0	0	1241	151	729	31	0	2	911	4425
Approach %	2.4	80.7	16.8	0.0	-	-	14.1	72.3	13.6	0.0	-	-	15.9	68.9	15.2	0.0	-	-	16.6	80.0	3.4	0.0	-	-	-
Total %	0.6	19.4	4.0	0.0	-	24.0	3.9	19.8	3.7	0.0	-	27.3	4.5	19.3	4.3	0.0	-	28.0	3.4	16.5	0.7	0.0	-	20.6	-
Motorcycles	0	0	0	0	-	0	0	1	1	0	-	2	0	1	0	0	-	1	0	0	0	0	-	0	3
% Motorcycles	0.0	0.0	0.0	-	-	0.0	0.0	0.1	0.6	-	-	0.2	0.0	0.1	0.0	-	-	0.1	0.0	0.0	0.0	-	-	0.0	0.1
Cars & Light Goods	25	844	175	0	-	1044	169	862	161	0	-	1192	194	847	182	0	-	1223	151	715	30	0	-	896	4355
% Cars & Light Goods	96.2	98.4	97.8	-	-	98.2	98.8	98.5	98.2	-	-	98.5	98.5	99.1	96.3	-	-	98.5	100.0	98.1	96.8	-	-	98.4	98.4
Buses	0	5	2	0	-	7	1	2	2	0	-	5	1	2	7	0	-	10	0	8	0	0	-	8	30
% Buses	0.0	0.6	1.1	-	-	0.7	0.6	0.2	1.2	-	-	0.4	0.5	0.2	3.7	-	-	0.8	0.0	1.1	0.0	-	-	0.9	0.7
Single-Unit Trucks	1	7	1	0	-	9	1	9	0	0	-	10	2	2	0	0	-	4	0	4	1	0	-	5	28
% Single-Unit Trucks	3.8	0.8	0.6	-	-	0.8	0.6	1.0	0.0	-	-	0.8	1.0	0.2	0.0	-	-	0.3	0.0	0.5	3.2	-	-	0.5	0.6
Articulated Trucks	0	2	0	0	-	2	0	1	0	0	-	1	0	3	0	0	-	3	0	2	0	0	-	2	8
% Articulated Trucks	0.0	0.2	0.0	-	-	0.2	0.0	0.1	0.0	-	-	0.1	0.0	0.4	0.0	-	-	0.2	0.0	0.3	0.0	-	-	0.2	0.2
Bicycles on Road	0	0	1	0	-	1	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	1
% Bicycles on Road	0.0	0.0	0.6	-	-	0.1	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	2	-	-
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100.0	-	-




Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Beaverdams Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 3

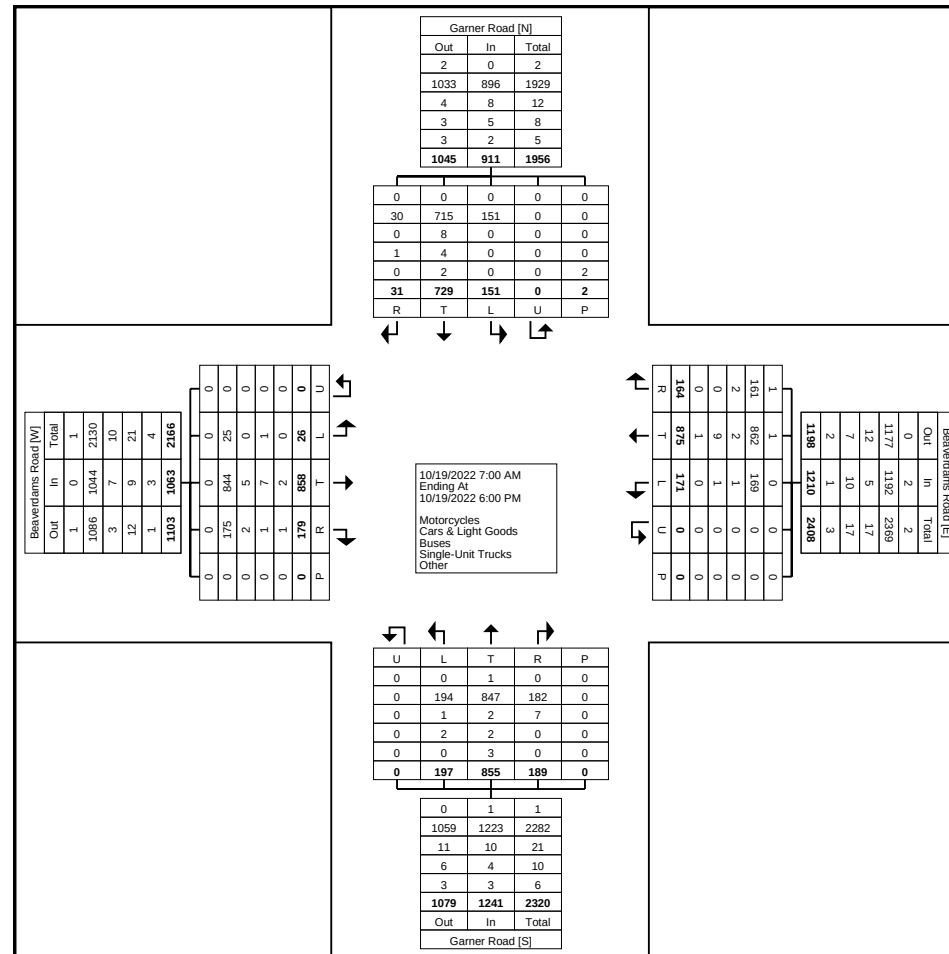

Turning Movement Data Plot




Start Time	Beaverdams Road Eastbound						Beaverdams Road Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
7:45 AM	3	28	5	0	0	36	4	27	7	0	0	38	4	44	8	0	0	56	5	21	1	0	0	27	157
8:00 AM	0	27	2	0	0	29	3	28	4	0	0	35	9	49	13	0	0	71	7	13	1	0	0	21	156
8:15 AM	0	20	1	0	0	21	4	20	8	0	0	32	13	34	3	0	0	50	4	20	0	0	0	24	127
8:30 AM	1	24	2	0	0	27	4	28	9	0	0	41	10	43	11	0	0	64	6	16	2	0	0	24	156
Total	4	99	10	0	0	113	15	103	28	0	0	146	36	170	35	0	0	241	22	70	4	0	0	96	596
Approach %	3.5	87.6	8.8	0.0	-	-	10.3	70.5	19.2	0.0	-	-	14.9	70.5	14.5	0.0	-	-	22.9	72.9	4.2	0.0	-	-	-
Total %	0.7	16.6	1.7	0.0	-	19.0	2.5	17.3	4.7	0.0	-	24.5	6.0	28.5	5.9	0.0	-	40.4	3.7	11.7	0.7	0.0	-	16.1	-
PHF	0.333	0.884	0.500	0.000	-	0.785	0.938	0.920	0.778	0.000	-	0.890	0.692	0.867	0.673	0.000	-	0.849	0.786	0.833	0.500	0.000	-	0.889	0.949
Motorcycles	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Motorcycles	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Cars & Light Goods	3	97	9	0	-	109	15	102	26	0	-	143	36	167	31	0	-	234	22	65	4	0	-	91	577
% Cars & Light Goods	75.0	98.0	90.0	-	-	96.5	100.0	99.0	92.9	-	-	97.9	100.0	98.2	88.6	-	-	97.1	100.0	92.9	100.0	-	-	94.8	96.8
Buses	0	1	1	0	-	2	0	0	2	0	-	2	0	1	4	0	-	5	0	5	0	0	-	5	14
% Buses	0.0	1.0	10.0	-	-	1.8	0.0	0.0	7.1	-	-	1.4	0.0	0.6	11.4	-	-	2.1	0.0	7.1	0.0	-	-	5.2	2.3
Single-Unit Trucks	1	1	0	0	-	2	0	1	0	0	-	1	0	1	0	0	-	1	0	0	0	0	-	0	4
% Single-Unit Trucks	25.0	1.0	0.0	-	-	1.8	0.0	1.0	0.0	-	-	0.7	0.0	0.6	0.0	-	-	0.4	0.0	0.0	0.0	-	-	0.0	0.7
Articulated Trucks	0	0	0	0	-	0	0	0	0	0	-	0	0	1	0	0	-	1	0	0	0	0	-	0	1
% Articulated Trucks	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.6	0.0	-	-	0.4	0.0	0.0	0.0	-	-	0.0	0.2
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-




Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Beaverdams Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 5

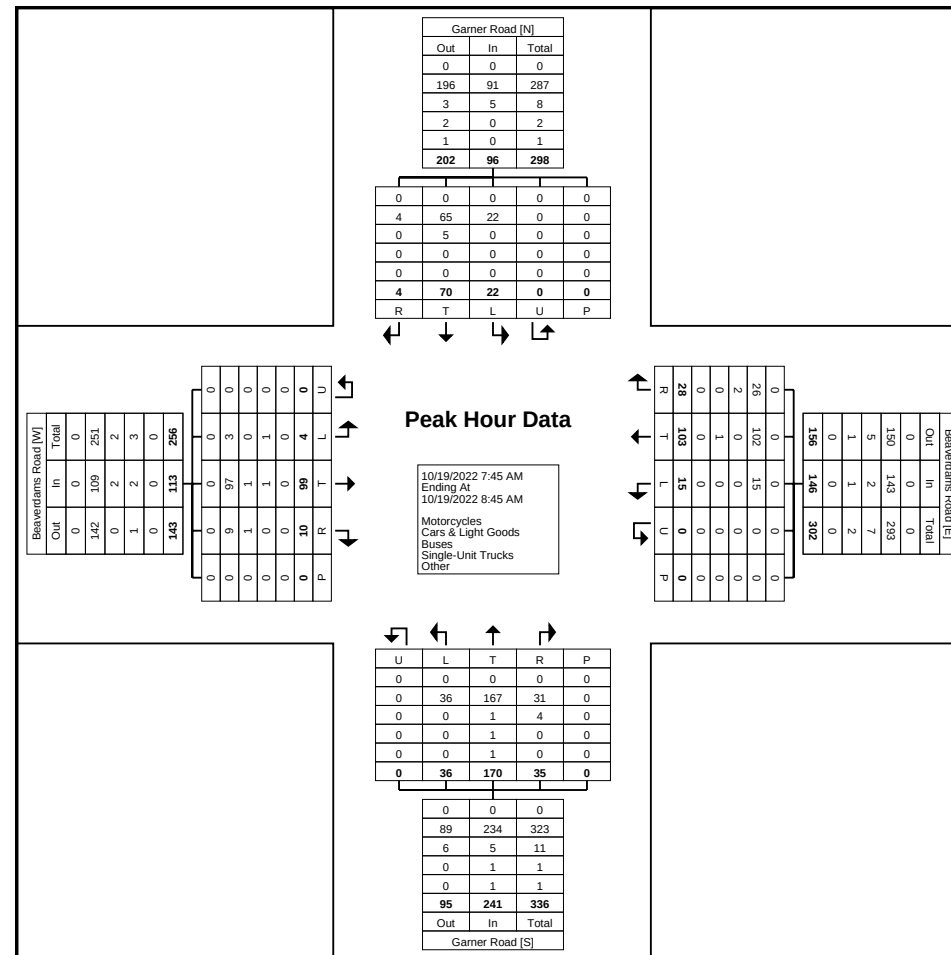






Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Beaverdams Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 7

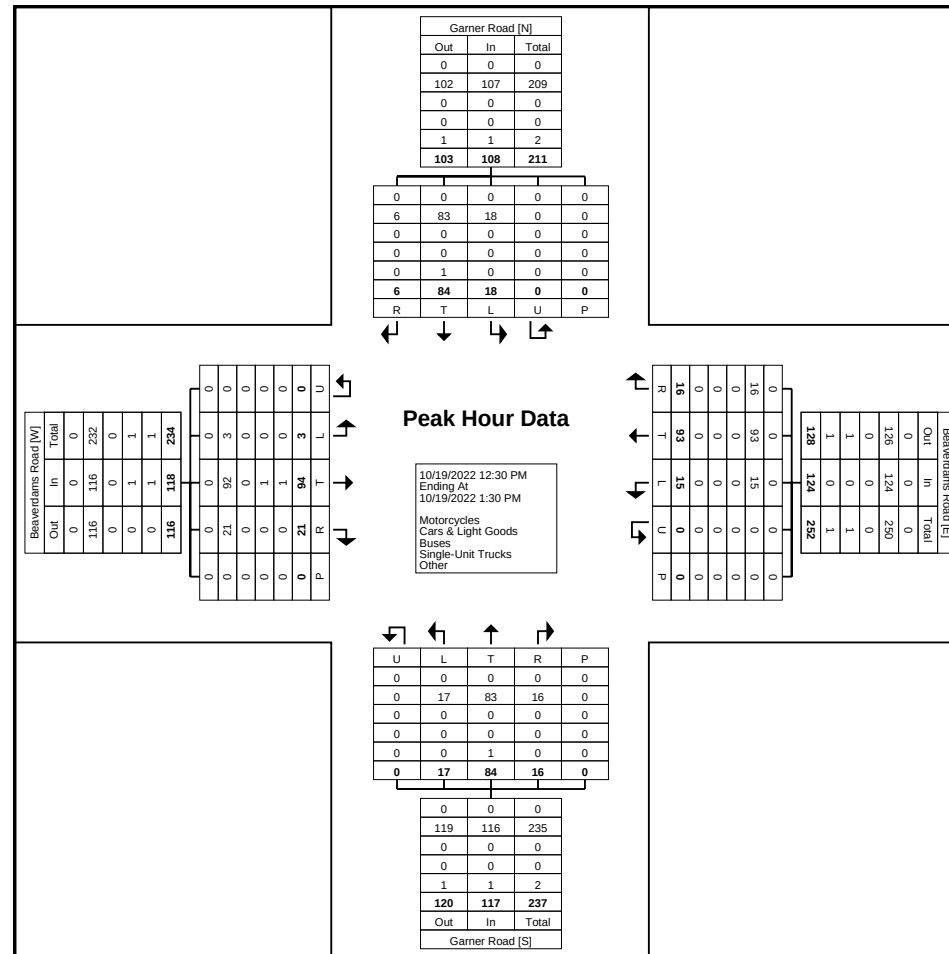


Start Time	Beaverdams Road Eastbound						Beaverdams Road Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
4:30 PM	1	39	11	0	0	51	7	33	7	0	0	47	5	41	6	0	0	52	8	29	1	0	0	38	188
4:45 PM	1	40	9	0	0	50	10	37	3	0	0	50	6	28	7	0	0	41	4	43	2	0	0	49	190
5:00 PM	1	50	11	0	0	62	11	48	4	0	0	63	6	36	3	0	0	45	8	35	1	0	0	44	214
5:15 PM	1	39	12	0	0	52	7	43	3	0	0	53	6	22	4	0	0	32	5	57	3	0	0	65	202
Total	4	168	43	0	0	215	35	161	17	0	0	213	23	127	20	0	0	170	25	164	7	0	0	196	794
Approach %	1.9	78.1	20.0	0.0	-	-	16.4	75.6	8.0	0.0	-	-	13.5	74.7	11.8	0.0	-	-	12.8	83.7	3.6	0.0	-	-	-
Total %	0.5	21.2	5.4	0.0	-	27.1	4.4	20.3	2.1	0.0	-	26.8	2.9	16.0	2.5	0.0	-	21.4	3.1	20.7	0.9	0.0	-	24.7	-
PHF	1.000	0.840	0.896	0.000	-	0.867	0.795	0.839	0.607	0.000	-	0.845	0.958	0.774	0.714	0.000	-	0.817	0.781	0.719	0.583	0.000	-	0.754	0.928
Motorcycles	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Motorcycles	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Cars & Light Goods	4	168	43	0	-	215	35	159	17	0	-	211	23	127	20	0	-	170	25	164	6	0	-	195	791
% Cars & Light Goods	100.0	100.0	100.0	-	-	100.0	100.0	98.8	100.0	-	-	99.1	100.0	100.0	100.0	-	-	100.0	100.0	100.0	85.7	-	-	99.5	99.6
Buses	0	0	0	0	-	0	0	1	0	0	-	1	0	0	0	0	-	0	0	0	0	0	-	0	1
% Buses	0.0	0.0	0.0	-	-	0.0	0.0	0.6	0.0	-	-	0.5	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.1
Single-Unit Trucks	0	0	0	0	-	0	0	1	0	0	-	1	0	0	0	0	-	0	0	0	1	0	-	1	2
% Single-Unit Trucks	0.0	0.0	0.0	-	-	0.0	0.0	0.6	0.0	-	-	0.5	0.0	0.0	0.0	-	-	0.0	0.0	0.0	14.3	-	-	0.5	0.3
Articulated Trucks	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Articulated Trucks	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	0	-	-	-
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	0	-	-	-
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsI.com

Count Name: Garner Road & Beaverdams Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 9

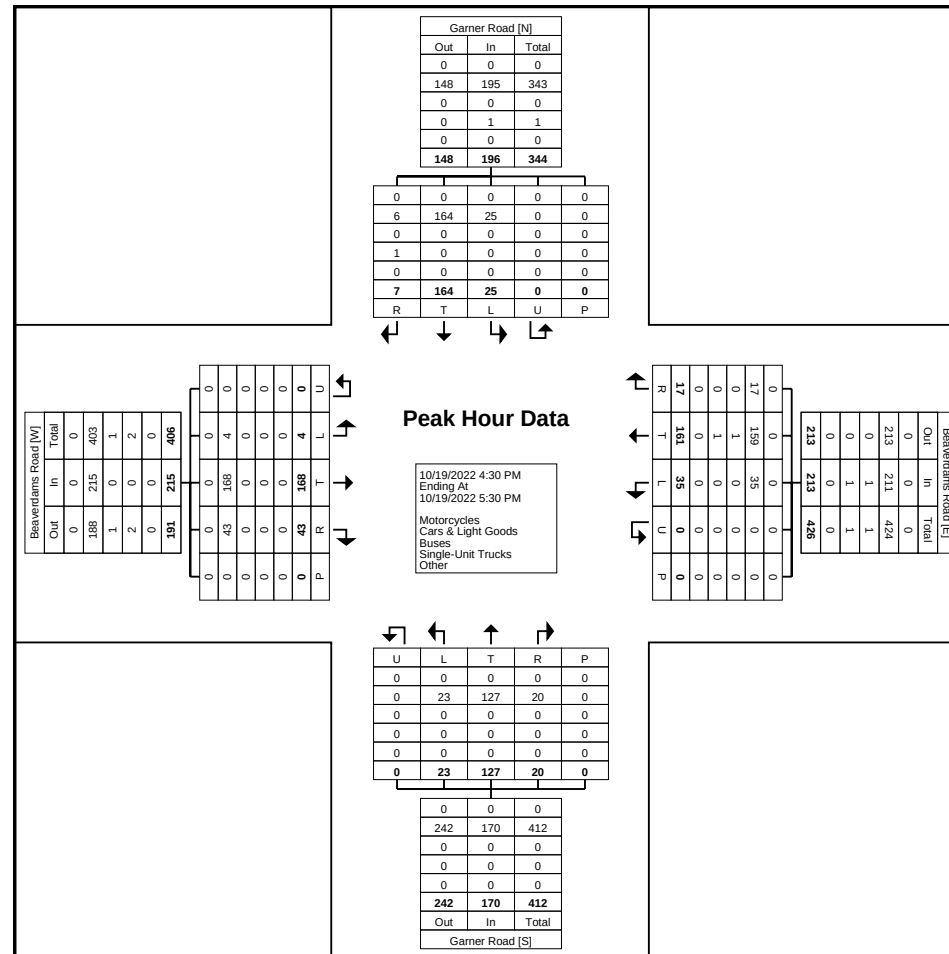



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsl.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 1

Turning Movement Data

Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
7:00 AM	2	52	0	0	0	54	3	40	5	0	0	48	3	7	1	0	0	11	5	1	1	0	0	7	120
7:15 AM	2	59	2	0	0	63	1	54	12	0	0	67	2	11	3	0	0	16	8	6	2	0	0	16	162
7:30 AM	5	84	2	0	1	91	3	60	13	0	0	76	4	23	3	0	2	30	8	19	2	0	0	29	226
7:45 AM	2	50	2	0	0	54	3	57	13	0	0	73	8	19	9	0	0	36	10	16	4	0	2	30	193
Hourly Total	11	245	6	0	1	262	10	211	43	0	0	264	17	60	16	0	2	93	31	42	9	0	2	82	701
8:00 AM	2	78	4	0	0	84	2	70	12	0	0	84	4	27	14	0	1	45	17	14	8	0	0	39	252
8:15 AM	3	86	5	0	0	94	4	54	11	0	0	69	4	25	6	0	0	35	14	8	6	0	0	28	226
8:30 AM	6	87	6	0	0	99	1	74	15	0	0	90	8	28	8	0	0	44	11	14	3	0	0	28	261
8:45 AM	5	76	4	0	0	85	11	71	9	0	0	91	7	27	12	0	0	46	18	10	5	0	0	33	255
Hourly Total	16	327	19	0	0	362	18	269	47	0	0	334	23	107	40	0	1	170	60	46	22	0	0	128	994
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
11:00 AM	2	71	2	0	0	75	4	47	16	0	0	67	3	17	7	0	0	27	11	9	3	0	0	23	192
11:15 AM	1	63	3	0	0	67	5	63	12	0	0	80	4	16	6	0	0	26	11	11	8	0	0	30	203
11:30 AM	2	79	5	0	1	86	11	53	12	1	0	77	6	16	7	0	0	29	16	9	5	0	0	30	222
11:45 AM	4	46	3	0	0	53	10	89	13	0	0	112	5	9	11	0	0	25	9	11	4	0	0	24	214
Hourly Total	9	259	13	0	1	281	30	252	53	1	0	336	18	58	31	0	0	107	47	40	20	0	0	107	831
12:00 PM	3	102	6	0	1	111	9	83	11	0	0	103	8	17	9	0	1	34	6	9	4	0	0	19	267
12:15 PM	2	84	5	0	0	91	8	67	13	0	0	88	2	11	6	0	0	19	15	16	3	0	0	34	232
12:30 PM	1	88	8	0	0	97	8	66	18	0	0	92	3	18	5	0	0	26	23	19	4	0	0	46	261
12:45 PM	1	43	4	0	0	48	7	61	18	0	0	86	3	17	6	0	0	26	11	17	1	0	0	29	189
Hourly Total	7	317	23	0	1	347	32	277	60	0	0	369	16	63	26	0	1	105	55	61	12	0	0	128	949
1:00 PM	4	105	7	0	0	116	5	71	7	0	0	83	8	17	6	0	0	31	15	14	4	0	0	33	263
1:15 PM	2	78	6	0	0	86	3	62	16	0	0	81	3	14	4	0	0	21	15	20	5	0	0	40	228
1:30 PM	0	86	3	0	0	89	10	70	21	0	0	101	3	20	9	0	0	32	5	9	5	0	0	19	241
1:45 PM	1	36	2	0	0	39	10	56	19	0	0	85	10	18	10	0	0	38	9	13	0	0	0	22	184
Hourly Total	7	305	18	0	0	330	28	259	63	0	0	350	24	69	29	0	0	122	44	56	14	0	0	114	916
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3:00 PM	6	92	13	0	0	111	9	99	16	0	1	124	2	18	7	0	0	27	22	23	14	0	0	59	321
3:15 PM	5	93	13	0	0	111	15	88	24	0	0	127	1	15	6	0	0	22	11	22	3	0	0	36	296
3:30 PM	3	113	7	0	0	123	11	96	17	0	0	124	5	23	13	0	1	41	16	25	2	0	0	43	331
3:45 PM	4	98	8	0	0	110	12	91	17	0	0	120	5	18	11	0	0	34	13	19	8	0	0	40	304
Hourly Total	18	396	41	0	0	455	47	374	74	0	1	495	13	74	37	0	1	124	62	89	27	0	0	178	1252
4:00 PM	6	83	6	0	1	95	10	102	12	0	0	124	1	14	6	0	1	21	17	23	5	0	1	45	285
4:15 PM	3	113	13	0	0	129	14	95	11	0	0	120	4	16	7	0	0	27	19	24	2	0	0	45	321
4:30 PM	6	108	6	0	0	120	6	93	32	0	0	131	5	28	14	0	1	47	14	22	5	0	0	41	339


4:45 PM	6	111	12	0	0	129	15	91	20	0	0	126	6	25	9	0	0	40	17	36	6	0	0	59	354
Hourly Total	21	415	37	0	1	473	45	381	75	0	0	501	16	83	36	0	2	135	67	105	18	0	1	190	1299
5:00 PM	1	112	9	0	0	122	13	108	23	0	0	144	4	29	10	0	0	43	17	33	8	0	1	58	367
5:15 PM	3	63	5	0	0	71	6	91	23	0	0	120	1	15	7	0	0	23	23	45	6	0	0	74	288
5:30 PM	4	118	7	0	0	129	10	89	17	0	0	116	5	23	5	0	0	33	12	19	3	0	0	34	312
5:45 PM	2	111	11	0	0	124	6	72	19	0	0	97	9	15	8	0	0	32	15	19	4	0	0	38	291
Hourly Total	10	404	32	0	0	446	35	360	82	0	0	477	19	82	30	0	0	131	67	116	21	0	1	204	1258
Grand Total	99	2668	189	0	4	2956	245	2383	497	1	1	3126	146	596	245	0	7	987	433	555	143	0	4	1131	8200
Approach %	3.3	90.3	6.4	0.0	-	-	7.8	76.2	15.9	0.0	-	-	14.8	60.4	24.8	0.0	-	-	38.3	49.1	12.6	0.0	-	-	-
Total %	1.2	32.5	2.3	0.0	-	36.0	3.0	29.1	6.1	0.0	-	38.1	1.8	7.3	3.0	0.0	-	12.0	5.3	6.8	1.7	0.0	-	13.8	-
Motorcycles	0	4	0	0	-	4	0	1	0	0	-	1	0	1	0	0	-	1	0	0	0	0	-	0	6
% Motorcycles	0.0	0.1	0.0	-	-	0.1	0.0	0.0	0.0	0.0	-	0.0	0.0	0.2	0.0	-	-	0.1	0.0	0.0	0.0	-	-	0.0	0.1
Cars & Light Goods	97	2557	188	0	-	2842	240	2294	482	1	-	3017	146	589	240	0	-	975	424	546	139	0	-	1109	7943
% Cars & Light Goods	98.0	95.8	99.5	-	-	96.1	98.0	96.3	97.0	100.0	-	96.5	100.0	98.8	98.0	-	-	98.8	97.9	98.4	97.2	-	-	98.1	96.9
Buses	1	31	0	0	-	32	1	27	9	0	-	37	0	3	4	0	-	7	4	5	3	0	-	12	88
% Buses	1.0	1.2	0.0	-	-	1.1	0.4	1.1	1.8	0.0	-	1.2	0.0	0.5	1.6	-	-	0.7	0.9	0.9	2.1	-	-	1.1	1.1
Single-Unit Trucks	1	57	1	0	-	59	4	44	3	0	-	51	0	3	1	0	-	4	3	4	1	0	-	8	122
% Single-Unit Trucks	1.0	2.1	0.5	-	-	2.0	1.6	1.8	0.6	0.0	-	1.6	0.0	0.5	0.4	-	-	0.4	0.7	0.7	0.7	-	-	0.7	1.5
Articulated Trucks	0	16	0	0	-	16	0	15	2	0	-	17	0	0	0	0	-	0	2	0	0	0	-	2	35
% Articulated Trucks	0.0	0.6	0.0	-	-	0.5	0.0	0.6	0.4	0.0	-	0.5	0.0	0.0	0.0	-	-	0.0	0.5	0.0	0.0	-	-	0.2	0.4
Bicycles on Road	0	3	0	0	-	3	0	2	1	0	-	3	0	0	0	0	-	0	0	0	0	0	-	0	6
% Bicycles on Road	0.0	0.1	0.0	-	-	0.1	0.0	0.1	0.2	0.0	-	0.1	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.1
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	0	-	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	-	0.0	-	-	-	-	-	100.0	-	-	-	-	-	0.0	-	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	-	4	-	-	-	-	-	0	-	-	-	-	-	7	-	-	-	-	-	4	-	-
% Pedestrians	-	-	-	-	100.0	-	-	-	-	-	0.0	-	-	-	-	-	100.0	-	-	-	-	-	100.0	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 3

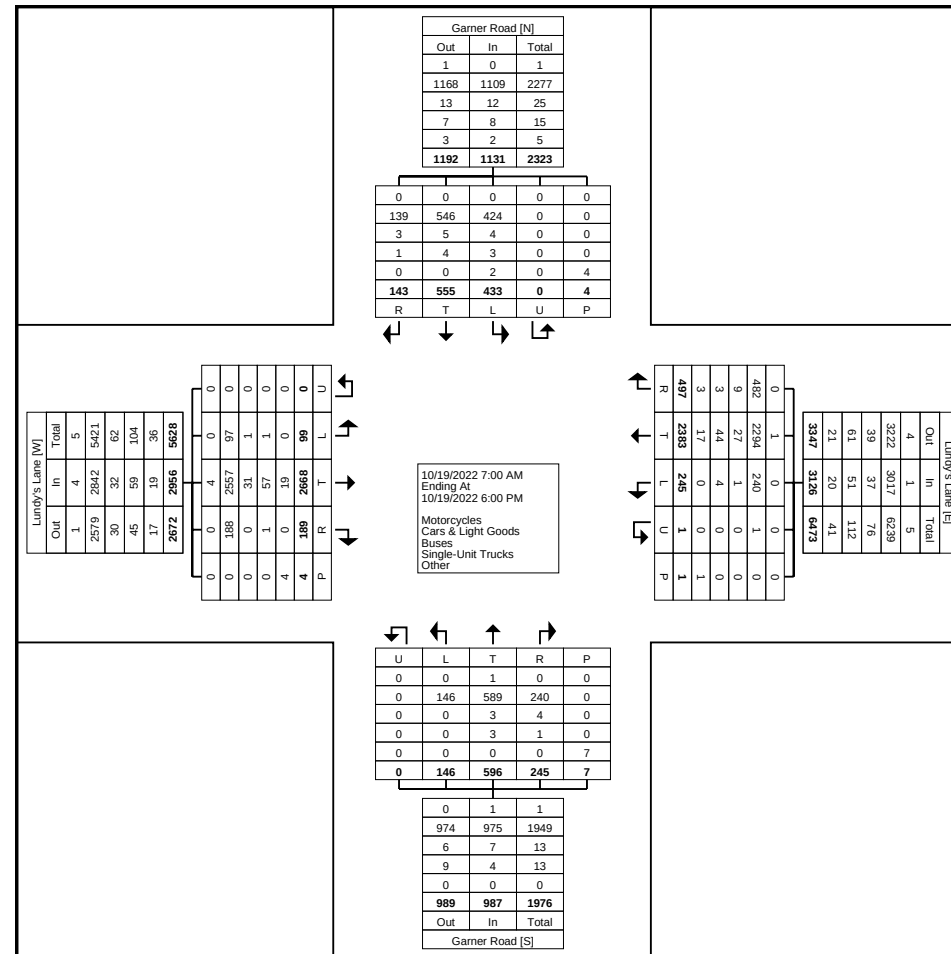

Turning Movement Data Plot



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 4

Turning Movement Peak Hour Data (8:00 AM)


Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
8:00 AM	2	78	4	0	0	84	2	70	12	0	0	84	4	27	14	0	1	45	17	14	8	0	0	39	252
8:15 AM	3	86	5	0	0	94	4	54	11	0	0	69	4	25	6	0	0	35	14	8	6	0	0	28	226
8:30 AM	6	87	6	0	0	99	1	74	15	0	0	90	8	28	8	0	0	44	11	14	3	0	0	28	261
8:45 AM	5	76	4	0	0	85	11	71	9	0	0	91	7	27	12	0	0	46	18	10	5	0	0	33	255
Total	16	327	19	0	0	362	18	269	47	0	0	334	23	107	40	0	1	170	60	46	22	0	0	128	994
Approach %	4.4	90.3	5.2	0.0	-	-	5.4	80.5	14.1	0.0	-	-	13.5	62.9	23.5	0.0	-	-	46.9	35.9	17.2	0.0	-	-	-
Total %	1.6	32.9	1.9	0.0	-	36.4	1.8	27.1	4.7	0.0	-	33.6	2.3	10.8	4.0	0.0	-	17.1	6.0	4.6	2.2	0.0	-	12.9	-
PHF	0.667	0.940	0.792	0.000	-	0.914	0.409	0.909	0.783	0.000	-	0.918	0.719	0.955	0.714	0.000	-	0.924	0.833	0.821	0.688	0.000	-	0.821	0.952
Motorcycles	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Motorcycles	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Cars & Light Goods	14	317	19	0	-	350	18	249	46	0	-	313	23	106	37	0	-	166	56	45	22	0	-	123	952
% Cars & Light Goods	87.5	96.9	100.0	-	-	96.7	100.0	92.6	97.9	-	-	93.7	100.0	99.1	92.5	-	-	97.6	93.3	97.8	100.0	-	-	96.1	95.8
Buses	1	3	0	0	-	4	0	5	1	0	-	6	0	0	2	0	-	2	4	0	0	0	-	4	16
% Buses	6.3	0.9	0.0	-	-	1.1	0.0	1.9	2.1	-	-	1.8	0.0	0.0	5.0	-	-	1.2	6.7	0.0	0.0	-	-	3.1	1.6
Single-Unit Trucks	1	6	0	0	-	7	0	13	0	0	-	13	0	1	1	0	-	2	0	1	0	0	-	1	23
% Single-Unit Trucks	6.3	1.8	0.0	-	-	1.9	0.0	4.8	0.0	-	-	3.9	0.0	0.9	2.5	-	-	1.2	0.0	2.2	0.0	-	-	0.8	2.3
Articulated Trucks	0	1	0	0	-	1	0	2	0	0	-	2	0	0	0	0	-	0	0	0	0	0	-	0	3
% Articulated Trucks	0.0	0.3	0.0	-	-	0.3	0.0	0.7	0.0	-	-	0.6	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.3
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	0	-	-	-
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.0	-	-	-	-	-	-	-	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	0	-	-
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100.0	-	-	-	-	-	-	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 5

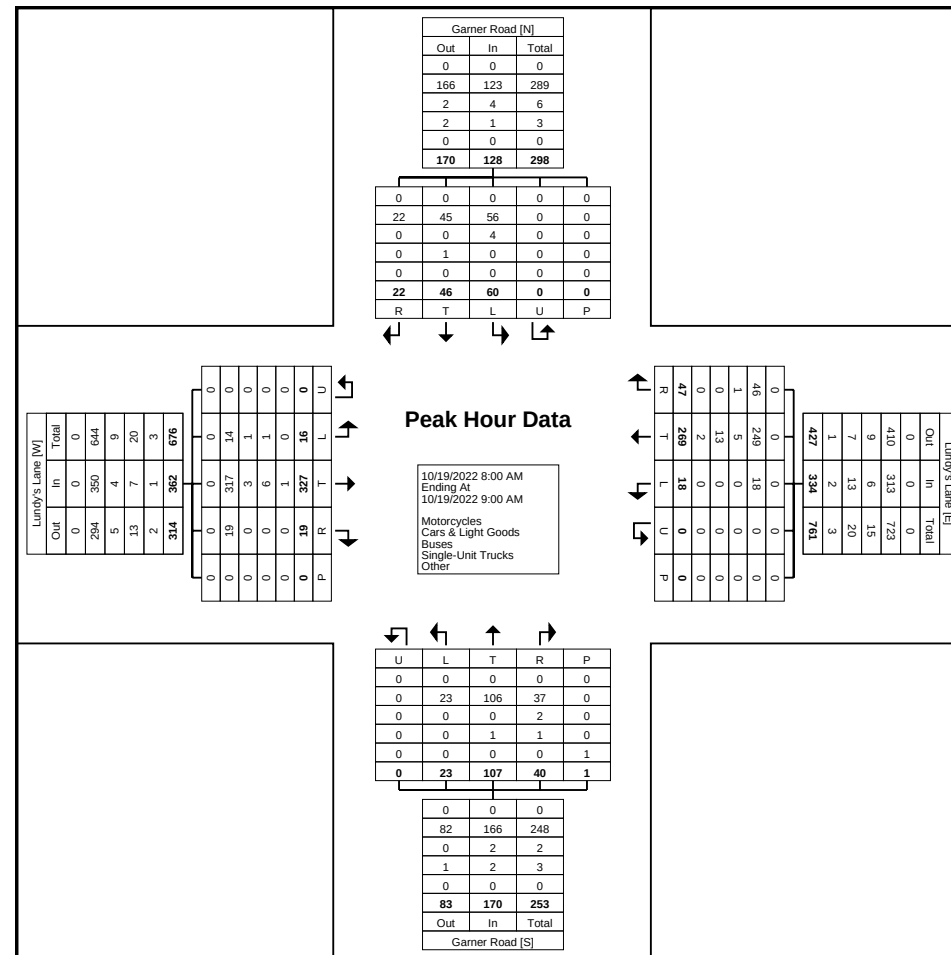



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsl.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 6

Turning Movement Peak Hour Data (11:45 AM)


Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
11:45 AM	4	46	3	0	0	53	10	89	13	0	0	112	5	9	11	0	0	25	9	11	4	0	0	24	214
12:00 PM	3	102	6	0	1	111	9	83	11	0	0	103	8	17	9	0	1	34	6	9	4	0	0	19	267
12:15 PM	2	84	5	0	0	91	8	67	13	0	0	88	2	11	6	0	0	19	15	16	3	0	0	34	232
12:30 PM	1	88	8	0	0	97	8	66	18	0	0	92	3	18	5	0	0	26	23	19	4	0	0	46	261
Total	10	320	22	0	1	352	35	305	55	0	0	395	18	55	31	0	1	104	53	55	15	0	0	123	974
Approach %	2.8	90.9	6.3	0.0	-	-	8.9	77.2	13.9	0.0	-	-	17.3	52.9	29.8	0.0	-	-	43.1	44.7	12.2	0.0	-	-	-
Total %	1.0	32.9	2.3	0.0	-	36.1	3.6	31.3	5.6	0.0	-	40.6	1.8	5.6	3.2	0.0	-	10.7	5.4	5.6	1.5	0.0	-	12.6	-
PHF	0.625	0.784	0.688	0.000	-	0.793	0.875	0.857	0.764	0.000	-	0.882	0.563	0.764	0.705	0.000	-	0.765	0.576	0.724	0.938	0.000	-	0.668	0.912
Motorcycles	0	1	0	0	-	1	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	1
% Motorcycles	0.0	0.3	0.0	-	-	0.3	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.1
Cars & Light Goods	10	302	22	0	-	334	31	288	53	0	-	372	18	55	31	0	-	104	51	54	15	0	-	120	930
% Cars & Light Goods	100.0	94.4	100.0	-	-	94.9	88.6	94.4	96.4	-	-	94.2	100.0	100.0	100.0	-	-	100.0	96.2	98.2	100.0	-	-	97.6	95.5
Buses	0	5	0	0	-	5	1	3	0	0	-	4	0	0	0	0	-	0	0	0	0	0	-	0	9
% Buses	0.0	1.6	0.0	-	-	1.4	2.9	1.0	0.0	-	-	1.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.9
Single-Unit Trucks	0	8	0	0	-	8	3	8	2	0	-	13	0	0	0	0	-	0	2	1	0	0	-	3	24
% Single-Unit Trucks	0.0	2.5	0.0	-	-	2.3	8.6	2.6	3.6	-	-	3.3	0.0	0.0	0.0	-	-	0.0	3.8	1.8	0.0	-	-	2.4	2.5
Articulated Trucks	0	4	0	0	-	4	0	4	0	0	-	4	0	0	0	0	-	0	0	0	0	0	-	0	8
% Articulated Trucks	0.0	1.3	0.0	-	-	1.1	0.0	1.3	0.0	-	-	1.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.8
Bicycles on Road	0	0	0	0	-	0	0	2	0	0	-	2	0	0	0	0	-	0	0	0	0	0	-	0	2
% Bicycles on Road	0.0	0.0	0.0	-	-	0.0	0.0	0.7	0.0	-	-	0.5	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.2
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	-	0.0	-	-	-	-	-	-	-	-	-	-	-	0.0	-	-	-	-	-	-	-	-
Pedestrians	-	-	-	-	1	-	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	0	-	-
% Pedestrians	-	-	-	-	100.0	-	-	-	-	-	-	-	-	-	-	-	100.0	-	-	-	-	-	-	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 7

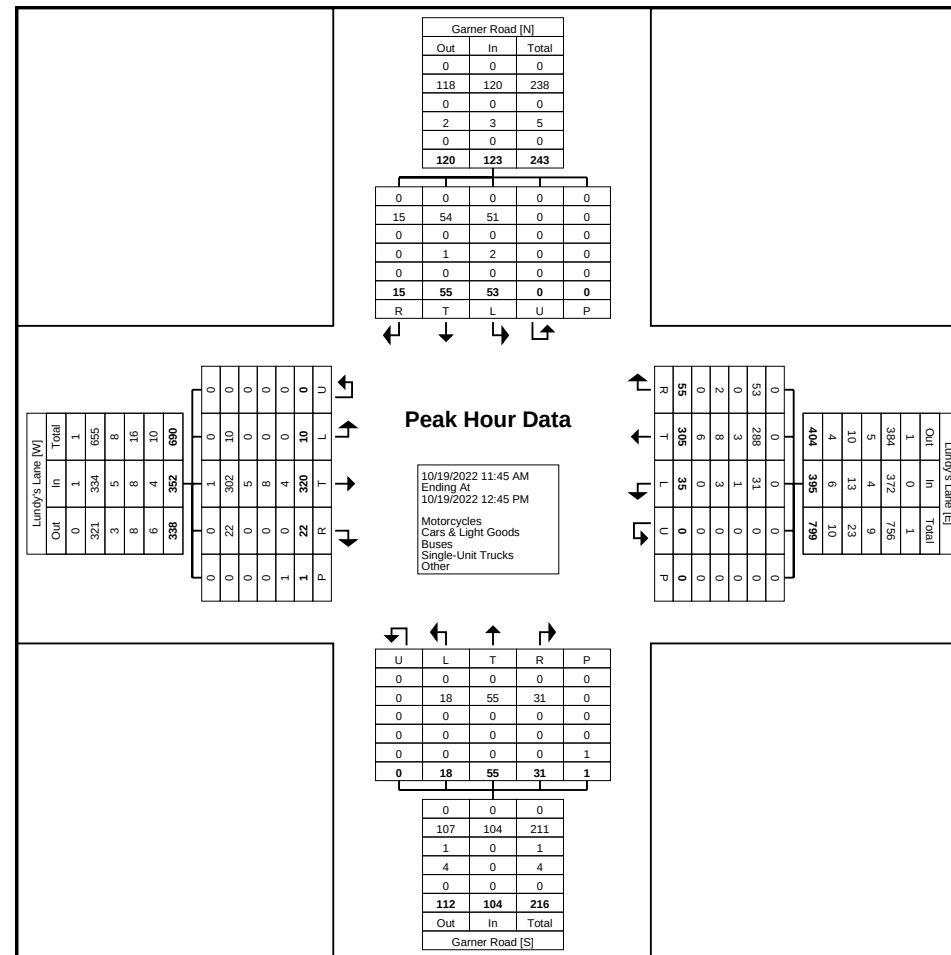

Turning Movement Peak Hour Data Plot (11:45 AM)



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 8

Turning Movement Peak Hour Data (4:15 PM)


Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Garner Road Northbound						Garner Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
4:15 PM	3	113	13	0	0	129	14	95	11	0	0	120	4	16	7	0	0	27	19	24	2	0	0	45	321
4:30 PM	6	108	6	0	0	120	6	93	32	0	0	131	5	28	14	0	1	47	14	22	5	0	0	41	339
4:45 PM	6	111	12	0	0	129	15	91	20	0	0	126	6	25	9	0	0	40	17	36	6	0	0	59	354
5:00 PM	1	112	9	0	0	122	13	108	23	0	0	144	4	29	10	0	0	43	17	33	8	0	1	58	367
Total	16	444	40	0	0	500	48	387	86	0	0	521	19	98	40	0	1	157	67	115	21	0	1	203	1381
Approach %	3.2	88.8	8.0	0.0	-	-	9.2	74.3	16.5	0.0	-	-	12.1	62.4	25.5	0.0	-	-	33.0	56.7	10.3	0.0	-	-	-
Total %	1.2	32.2	2.9	0.0	-	36.2	3.5	28.0	6.2	0.0	-	37.7	1.4	7.1	2.9	0.0	-	11.4	4.9	8.3	1.5	0.0	-	14.7	-
PHF	0.667	0.982	0.769	0.000	-	0.969	0.800	0.896	0.672	0.000	-	0.905	0.792	0.845	0.714	0.000	-	0.835	0.882	0.799	0.656	0.000	-	0.860	0.941
Motorcycles	0	0	0	0	-	0	0	1	0	0	-	1	0	0	0	0	-	0	0	0	0	0	-	0	1
% Motorcycles	0.0	0.0	0.0	-	-	0.0	0.0	0.3	0.0	-	-	0.2	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.1
Cars & Light Goods	16	433	40	0	-	489	48	382	85	0	-	515	19	97	39	0	-	155	67	115	20	0	-	202	1361
% Cars & Light Goods	100.0	97.5	100.0	-	-	97.8	100.0	98.7	98.8	-	-	98.8	100.0	99.0	97.5	-	-	98.7	100.0	100.0	95.2	-	-	99.5	98.6
Buses	0	3	0	0	-	3	0	2	1	0	-	3	0	0	1	0	-	1	0	0	1	0	-	1	8
% Buses	0.0	0.7	0.0	-	-	0.6	0.0	0.5	1.2	-	-	0.6	0.0	0.0	2.5	-	-	0.6	0.0	0.0	4.8	-	-	0.5	0.6
Single-Unit Trucks	0	5	0	0	-	5	0	2	0	0	-	2	0	1	0	0	-	1	0	0	0	0	-	0	8
% Single-Unit Trucks	0.0	1.1	0.0	-	-	1.0	0.0	0.5	0.0	-	-	0.4	0.0	1.0	0.0	-	-	0.6	0.0	0.0	0.0	-	-	0.0	0.6
Articulated Trucks	0	3	0	0	-	3	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	3
% Articulated Trucks	0.0	0.7	0.0	-	-	0.6	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.2
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	0	-	-	-
% Bicycles on Crosswalk	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.0	-	-	-	-	0.0	-	-	-
Pedestrians	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	1	-	-	-
% Pedestrians	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100.0	-	-	-	-	100.0	-	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsI.com

Count Name: Garner Road & Lundy's Lane
Site Code: 220571
Start Date: 10/19/2022
Page No: 9

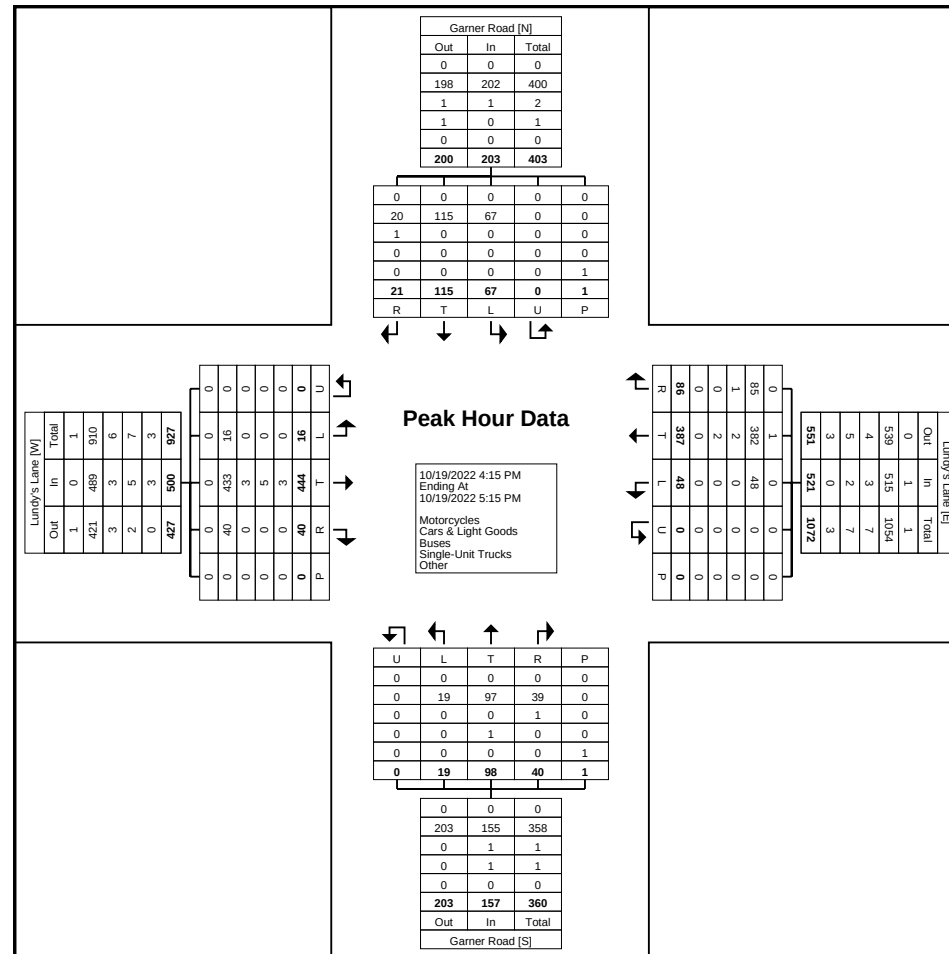



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Lundy's Lane & Kalar Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 1

Turning Movement Data

Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Kalar Road Northbound						Kalar Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
7:00 AM	3	59	6	0	0	68	15	43	9	0	1	67	7	25	35	0	1	67	12	19	10	0	0	41	243
7:15 AM	6	51	4	0	5	61	16	52	10	0	0	78	15	31	53	0	0	99	13	17	8	0	0	38	276
7:30 AM	6	97	7	0	2	110	33	57	5	0	0	95	16	25	61	0	0	102	14	53	13	0	1	80	387
7:45 AM	10	69	12	0	2	91	29	51	12	0	1	92	18	51	58	0	2	127	16	67	10	0	2	93	403
Hourly Total	25	276	29	0	9	330	93	203	36	0	2	332	56	132	207	0	3	395	55	156	41	0	3	252	1309
8:00 AM	12	84	9	0	1	105	22	54	10	0	0	86	21	47	73	0	5	141	16	42	11	0	1	69	401
8:15 AM	12	84	14	0	6	110	35	49	18	0	0	102	17	62	68	0	3	147	25	67	9	0	3	101	460
8:30 AM	13	76	16	0	2	105	44	60	10	0	0	114	20	51	96	0	2	167	26	57	14	0	2	97	483
8:45 AM	10	94	16	0	4	120	46	70	6	0	0	122	18	52	68	0	2	138	13	63	9	0	6	85	465
Hourly Total	47	338	55	0	13	440	147	233	44	0	0	424	76	212	305	0	12	593	80	229	43	0	12	352	1809
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
11:00 AM	8	96	10	0	2	114	49	53	13	0	0	115	20	40	48	0	5	108	22	52	8	0	1	82	419
11:15 AM	13	86	9	0	6	108	47	84	22	0	2	153	6	36	39	0	2	81	23	38	7	0	1	68	410
11:30 AM	13	102	3	0	2	118	44	72	18	0	1	134	18	44	41	0	2	103	26	43	11	0	0	80	435
11:45 AM	10	68	7	0	1	85	52	88	19	0	3	159	22	52	35	0	2	109	20	49	11	0	8	80	433
Hourly Total	44	352	29	0	11	425	192	297	72	0	6	561	66	172	163	0	11	401	91	182	37	0	10	310	1697
12:00 PM	15	96	11	0	24	122	46	83	17	0	7	146	17	44	47	0	27	108	40	56	11	0	33	107	483
12:15 PM	17	90	14	0	15	121	57	64	26	0	5	147	13	49	44	0	24	106	22	61	11	0	22	94	468
12:30 PM	14	89	16	1	4	120	47	76	22	0	1	145	18	47	56	0	11	121	24	52	12	0	2	88	474
12:45 PM	6	76	10	0	2	92	57	77	14	1	7	149	15	42	58	0	20	115	36	46	18	0	0	100	456
Hourly Total	52	351	51	1	45	455	207	300	79	1	20	587	63	182	205	0	82	450	122	215	52	0	57	389	1881
1:00 PM	21	92	24	0	1	137	45	64	16	0	2	125	18	47	38	0	14	103	14	63	14	0	0	91	456
1:15 PM	14	82	17	0	4	113	41	88	26	0	8	155	16	49	38	0	7	103	22	59	9	0	0	90	461
1:30 PM	12	108	9	0	11	129	58	96	10	0	0	164	13	45	45	0	4	103	26	51	12	0	0	89	485
1:45 PM	15	62	13	0	10	90	45	85	28	0	3	158	23	35	48	0	1	106	19	59	10	0	0	88	442
Hourly Total	62	344	63	0	26	469	189	333	80	0	13	602	70	176	169	0	26	415	81	232	45	0	0	358	1844
*** BREAK ***	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3:00 PM	24	113	14	0	9	151	75	119	24	0	3	218	25	68	64	0	11	157	26	75	9	0	2	110	636
3:15 PM	20	89	15	0	10	124	67	90	15	0	2	172	19	57	53	0	7	129	29	86	20	0	3	135	560
3:30 PM	23	124	26	0	9	173	63	96	15	0	1	174	22	54	47	0	4	123	22	69	14	0	3	105	575
3:45 PM	20	103	9	0	2	132	59	103	19	0	3	181	19	68	62	0	5	149	29	63	15	0	7	107	569
Hourly Total	87	429	64	0	30	580	264	408	73	0	9	745	85	247	226	0	27	558	106	293	58	0	15	457	2340
4:00 PM	17	89	15	1	4	122	92	128	20	0	5	240	25	64	70	0	5	159	22	77	9	0	3	108	629
4:15 PM	21	113	21	0	4	155	54	91	25	0	7	170	12	61	60	0	11	133	26	89	20	0	3	135	593
4:30 PM	23	99	18	0	6	140	84	115	16	0	5	215	35	58	62	0	9	155	22	87	11	0	7	120	630


4:45 PM	33	116	17	0	9	166	75	102	13	0	0	190	17	63	57	0	7	137	20	69	15	0	2	104	597
Hourly Total	94	417	71	1	23	583	305	436	74	0	17	815	89	246	249	0	32	584	90	322	55	0	15	467	2449
5:00 PM	23	103	30	0	0	156	86	118	19	0	4	223	19	55	49	0	5	123	28	82	12	0	3	122	624
5:15 PM	17	78	23	0	7	118	88	105	27	0	3	220	16	52	50	0	10	118	26	88	8	0	3	122	578
5:30 PM	23	97	19	0	2	139	67	92	11	0	0	170	24	65	53	0	2	142	16	83	14	0	0	113	564
5:45 PM	21	90	23	0	8	134	75	81	17	0	6	173	23	57	63	0	7	143	29	94	11	0	8	134	584
Hourly Total	84	368	95	0	17	547	316	396	74	0	13	786	82	229	215	0	24	526	99	347	45	0	14	491	2350
Grand Total	495	2875	457	2	174	3829	1713	2606	532	1	80	4852	587	1596	1739	0	217	3922	724	1976	376	0	126	3076	15679
Approach %	12.9	75.1	11.9	0.1	-	-	35.3	53.7	11.0	0.0	-	-	15.0	40.7	44.3	0.0	-	-	23.5	64.2	12.2	0.0	-	-	-
Total %	3.2	18.3	2.9	0.0	-	24.4	10.9	16.6	3.4	0.0	-	30.9	3.7	10.2	11.1	0.0	-	25.0	4.6	12.6	2.4	0.0	-	19.6	-
Motorcycles	0	3	2	0	-	5	0	4	2	0	-	6	1	1	0	0	-	2	0	1	0	0	-	1	14
% Motorcycles	0.0	0.1	0.4	0.0	-	0.1	0.0	0.2	0.4	0.0	-	0.1	0.2	0.1	0.0	-	-	0.1	0.0	0.1	0.0	-	-	0.0	0.1
Cars & Light Goods	486	2747	443	2	-	3678	1667	2508	512	1	-	4688	574	1559	1683	0	-	3816	705	1943	361	0	-	3009	15191
% Cars & Light Goods	98.2	95.5	96.9	100.0	-	96.1	97.3	96.2	96.2	100.0	-	96.6	97.8	97.7	96.8	-	-	97.3	97.4	98.3	96.0	-	-	97.8	96.9
Buses	3	40	3	0	-	46	17	33	6	0	-	56	1	22	26	0	-	49	10	17	5	0	-	32	183
% Buses	0.6	1.4	0.7	0.0	-	1.2	1.0	1.3	1.1	0.0	-	1.2	0.2	1.4	1.5	-	-	1.2	1.4	0.9	1.3	-	-	1.0	1.2
Single-Unit Trucks	4	65	9	0	-	78	26	43	12	0	-	81	10	12	30	0	-	52	9	15	9	0	-	33	244
% Single-Unit Trucks	0.8	2.3	2.0	0.0	-	2.0	1.5	1.7	2.3	0.0	-	1.7	1.7	0.8	1.7	-	-	1.3	1.2	0.8	2.4	-	-	1.1	1.6
Articulated Trucks	2	18	0	0	-	20	3	16	0	0	-	19	1	2	0	0	-	3	0	0	1	0	-	1	43
% Articulated Trucks	0.4	0.6	0.0	0.0	-	0.5	0.2	0.6	0.0	0.0	-	0.4	0.2	0.1	0.0	-	-	0.1	0.0	0.0	0.3	-	-	0.0	0.3
Bicycles on Road	0	2	0	0	-	2	0	2	0	0	-	2	0	0	0	0	-	0	0	0	0	0	-	0	4
% Bicycles on Road	0.0	0.1	0.0	0.0	-	0.1	0.0	0.1	0.0	0.0	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	9	-	-	-	-	-	2	-	-
% Bicycles on Crosswalk	-	-	-	-	0.0	-	-	-	-	-	1.3	-	-	-	-	-	4.1	-	-	-	-	-	1.6	-	-
Pedestrians	-	-	-	-	174	-	-	-	-	-	79	-	-	-	-	-	208	-	-	-	-	-	124	-	-
% Pedestrians	-	-	-	-	100.0	-	-	-	-	-	98.8	-	-	-	-	-	95.9	-	-	-	-	-	98.4	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Lundy's Lane & Kalar Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 3

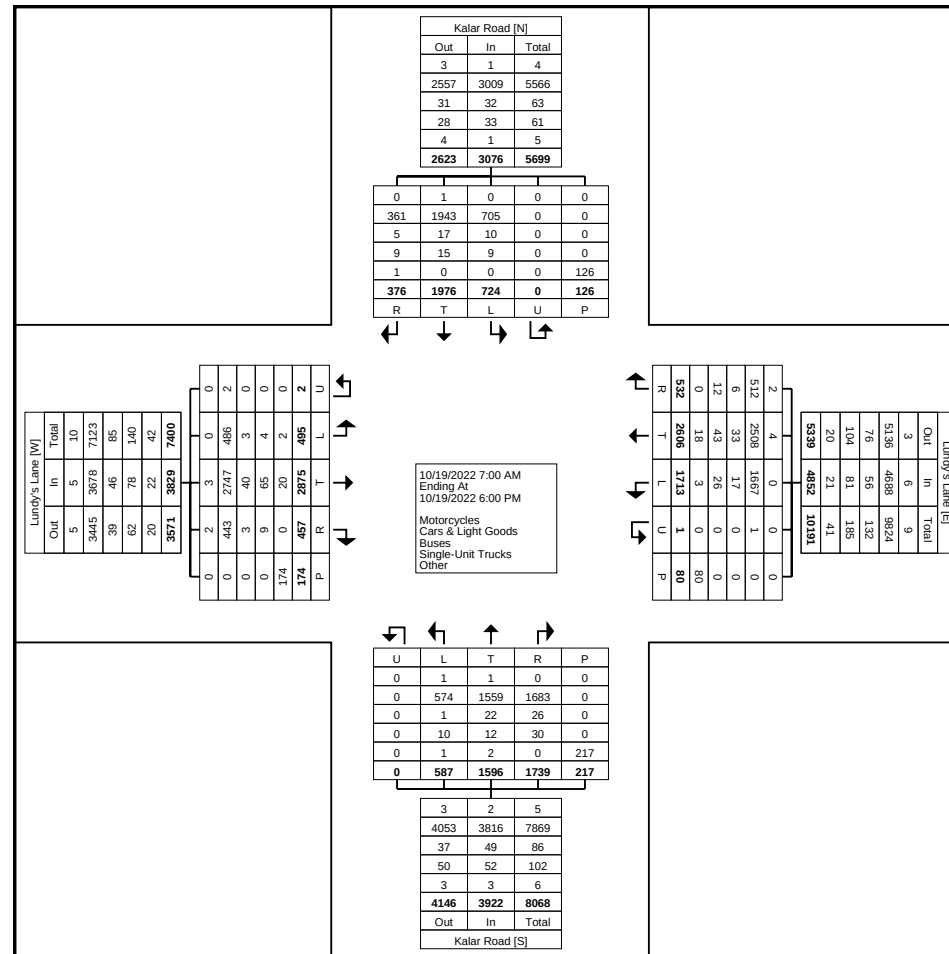

Turning Movement Data Plot



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsil.com

Count Name: Lundy's Lane & Kalar Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 4

Turning Movement Peak Hour Data (8:00 AM)

Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Kalar Road Northbound						Kalar Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
8:00 AM	12	84	9	0	1	105	22	54	10	0	0	86	21	47	73	0	5	141	16	42	11	0	1	69	401
8:15 AM	12	84	14	0	6	110	35	49	18	0	0	102	17	62	68	0	3	147	25	67	9	0	3	101	460
8:30 AM	13	76	16	0	2	105	44	60	10	0	0	114	20	51	96	0	2	167	26	57	14	0	2	97	483
8:45 AM	10	94	16	0	4	120	46	70	6	0	0	122	18	52	68	0	2	138	13	63	9	0	6	85	465
Total	47	338	55	0	13	440	147	233	44	0	0	424	76	212	305	0	12	593	80	229	43	0	12	352	1809
Approach %	10.7	76.8	12.5	0.0	-	-	34.7	55.0	10.4	0.0	-	-	12.8	35.8	51.4	0.0	-	-	22.7	65.1	12.2	0.0	-	-	-
Total %	2.6	18.7	3.0	0.0	-	24.3	8.1	12.9	2.4	0.0	-	23.4	4.2	11.7	16.9	0.0	-	32.8	4.4	12.7	2.4	0.0	-	19.5	-
PHF	0.904	0.899	0.859	0.000	-	0.917	0.799	0.832	0.611	0.000	-	0.869	0.905	0.855	0.794	0.000	-	0.888	0.769	0.854	0.768	0.000	-	0.871	0.936
Motorcycles	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Motorcycles	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Cars & Light Goods	43	322	50	0	-	415	134	217	40	0	-	391	74	205	292	0	-	571	75	224	41	0	-	340	1717
% Cars & Light Goods	91.5	95.3	90.9	-	-	94.3	91.2	93.1	90.9	-	-	92.2	97.4	96.7	95.7	-	-	96.3	93.8	97.8	95.3	-	-	96.6	94.9
Buses	2	7	2	0	-	11	6	6	3	0	-	15	0	3	9	0	-	12	4	3	1	0	-	8	46
% Buses	4.3	2.1	3.6	-	-	2.5	4.1	2.6	6.8	-	-	3.5	0.0	1.4	3.0	-	-	2.0	5.0	1.3	2.3	-	-	2.3	2.5
Single-Unit Trucks	1	7	3	0	-	11	5	9	1	0	-	15	1	2	4	0	-	7	1	2	1	0	-	4	37
% Single-Unit Trucks	2.1	2.1	5.5	-	-	2.5	3.4	3.9	2.3	-	-	3.5	1.3	0.9	1.3	-	-	1.2	1.3	0.9	2.3	-	-	1.1	2.0
Articulated Trucks	1	2	0	0	-	3	2	1	0	0	-	3	1	2	0	0	-	3	0	0	0	0	-	0	9
% Articulated Trucks	2.1	0.6	0.0	-	-	0.7	1.4	0.4	0.0	-	-	0.7	1.3	0.9	0.0	-	-	0.5	0.0	0.0	0.0	-	-	0.0	0.5
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	-	0.0	-	-	-	-	-	-	-	-	-	-	-	0.0	-	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	-	13	-	-	-	-	-	0	-	-	-	-	-	12	-	-	-	-	-	12	-	-
% Pedestrians	-	-	-	-	100.0	-	-	-	-	-	-	-	-	-	-	-	100.0	-	-	-	-	-	100.0	-	-

Turning Movement Peak Hour Data Plot (8:00 AM)



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@pts1.com

Count Name: Lundy's Lane & Kalar Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 6

Turning Movement Peak Hour Data (12:00 PM)


Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Kalar Road Northbound						Kalar Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
12:00 PM	15	96	11	0	24	122	46	83	17	0	7	146	17	44	47	0	27	108	40	56	11	0	33	107	483
12:15 PM	17	90	14	0	15	121	57	64	26	0	5	147	13	49	44	0	24	106	22	61	11	0	22	94	468
12:30 PM	14	89	16	1	4	120	47	76	22	0	1	145	18	47	56	0	11	121	24	52	12	0	2	88	474
12:45 PM	6	76	10	0	2	92	57	77	14	1	7	149	15	42	58	0	20	115	36	46	18	0	0	100	456
Total	52	351	51	1	45	455	207	300	79	1	20	587	63	182	205	0	82	450	122	215	52	0	57	389	1881
Approach %	11.4	77.1	11.2	0.2	-	-	35.3	51.1	13.5	0.2	-	-	14.0	40.4	45.6	0.0	-	-	31.4	55.3	13.4	0.0	-	-	-
Total %	2.8	18.7	2.7	0.1	-	24.2	11.0	15.9	4.2	0.1	-	31.2	3.3	9.7	10.9	0.0	-	23.9	6.5	11.4	2.8	0.0	-	20.7	-
PHF	0.765	0.914	0.797	0.250	-	0.932	0.908	0.904	0.760	0.250	-	0.985	0.875	0.929	0.884	0.000	-	0.930	0.763	0.881	0.722	0.000	-	0.909	0.974
Motorcycles	0	2	0	0	-	2	0	0	0	0	-	0	0	1	0	0	-	1	0	1	0	0	-	1	4
% Motorcycles	0.0	0.6	0.0	0.0	-	0.4	0.0	0.0	0.0	0.0	-	0.0	0.0	0.5	0.0	-	-	0.2	0.0	0.5	0.0	-	-	0.3	0.2
Cars & Light Goods	50	329	50	1	-	430	202	287	74	1	-	564	60	178	199	0	-	437	118	207	48	0	-	373	1804
% Cars & Light Goods	96.2	93.7	98.0	100.0	-	94.5	97.6	95.7	93.7	100.0	-	96.1	95.2	97.8	97.1	-	-	97.1	96.7	96.3	92.3	-	-	95.9	95.9
Buses	0	6	0	0	-	6	1	4	0	0	-	5	0	1	0	0	-	1	1	3	0	0	-	4	16
% Buses	0.0	1.7	0.0	0.0	-	1.3	0.5	1.3	0.0	0.0	-	0.9	0.0	0.5	0.0	-	-	0.2	0.8	1.4	0.0	-	-	1.0	0.9
Single-Unit Trucks	2	11	1	0	-	14	4	3	5	0	-	12	3	2	6	0	-	11	3	4	4	0	-	11	48
% Single-Unit Trucks	3.8	3.1	2.0	0.0	-	3.1	1.9	1.0	6.3	0.0	-	2.0	4.8	1.1	2.9	-	-	2.4	2.5	1.9	7.7	-	-	2.8	2.6
Articulated Trucks	0	3	0	0	-	3	0	6	0	0	-	6	0	0	0	0	-	0	0	0	0	0	-	0	9
% Articulated Trucks	0.0	0.9	0.0	0.0	-	0.7	0.0	2.0	0.0	0.0	-	1.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.5
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	0.0	-	0.0	0.0	0.0	0.0	0.0	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	1	-	-
% Bicycles on Crosswalk	-	-	-	-	0.0	-	-	-	-	-	0.0	-	-	-	-	-	1.2	-	-	-	-	-	1.8	-	-
Pedestrians	-	-	-	-	45	-	-	-	-	-	20	-	-	-	-	-	81	-	-	-	-	-	56	-	-
% Pedestrians	-	-	-	-	100.0	-	-	-	-	-	100.0	-	-	-	-	-	98.8	-	-	-	-	-	98.2	-	-



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsI.com

Count Name: Lundy's Lane & Kalar Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 7

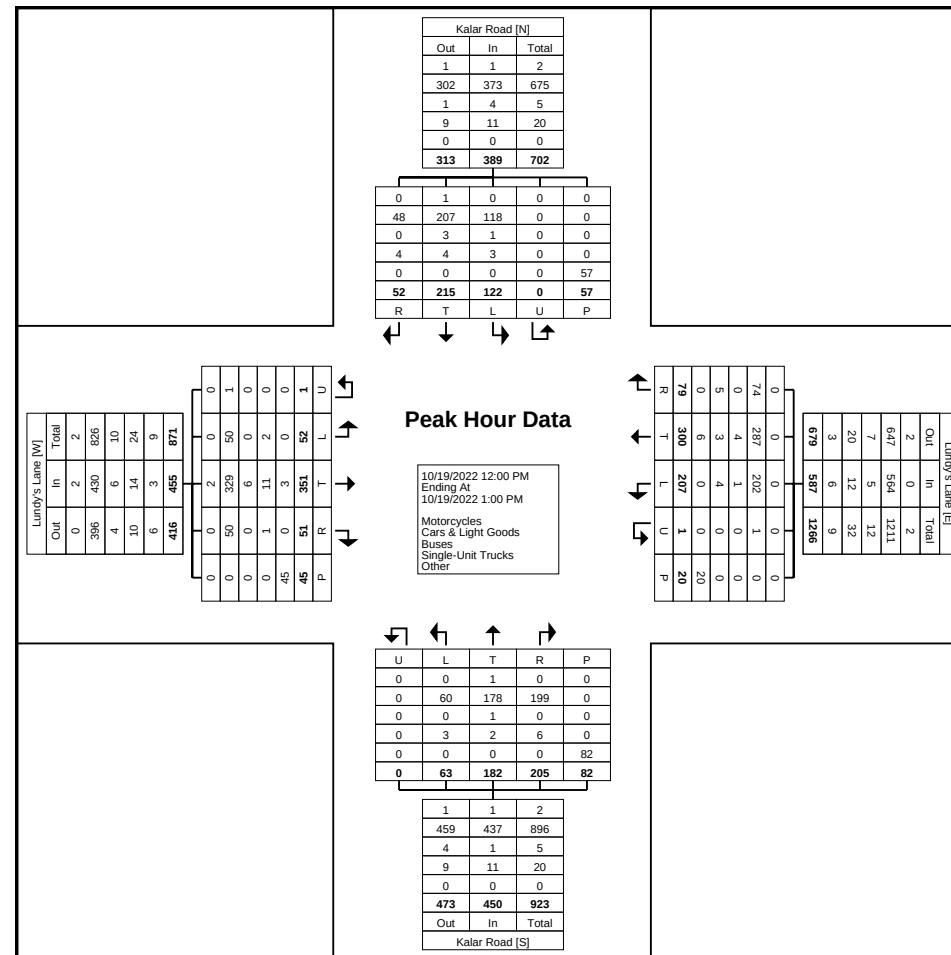

Turning Movement Peak Hour Data Plot (12:00 PM)



Paradigm Transportation Solutions Limited
5A-150 Pinebush Rd

Cambridge, Ontario, Canada N1R 8J8
519-896-3163 cbowness@ptsil.com

Count Name: Lundy's Lane & Kalar Road
Site Code: 220571
Start Date: 10/19/2022
Page No: 8

Turning Movement Peak Hour Data (4:00 PM)


Start Time	Lundy's Lane Eastbound						Lundy's Lane Westbound						Kalar Road Northbound						Kalar Road Southbound						Int. Total
	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	Left	Thru	Right	U-Turn	Peds	App. Total	
4:00 PM	17	89	15	1	4	122	92	128	20	0	5	240	25	64	70	0	5	159	22	77	9	0	3	108	629
4:15 PM	21	113	21	0	4	155	54	91	25	0	7	170	12	61	60	0	11	133	26	89	20	0	3	135	593
4:30 PM	23	99	18	0	6	140	84	115	16	0	5	215	35	58	62	0	9	155	22	87	11	0	7	120	630
4:45 PM	33	116	17	0	9	166	75	102	13	0	0	190	17	63	57	0	7	137	20	69	15	0	2	104	597
Total	94	417	71	1	23	583	305	436	74	0	17	815	89	246	249	0	32	584	90	322	55	0	15	467	2449
Approach %	16.1	71.5	12.2	0.2	-	-	37.4	53.5	9.1	0.0	-	-	15.2	42.1	42.6	0.0	-	-	19.3	69.0	11.8	0.0	-	-	-
Total %	3.8	17.0	2.9	0.0	-	23.8	12.5	17.8	3.0	0.0	-	33.3	3.6	10.0	10.2	0.0	-	23.8	3.7	13.1	2.2	0.0	-	19.1	-
PHF	0.712	0.899	0.845	0.250	-	0.878	0.829	0.852	0.740	0.000	-	0.849	0.636	0.961	0.889	0.000	-	0.918	0.865	0.904	0.688	0.000	-	0.865	0.972
Motorcycles	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Motorcycles	0.0	0.0	0.0	0.0	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Cars & Light Goods	94	405	70	1	-	570	304	428	74	0	-	806	89	240	243	0	-	572	88	317	54	0	-	459	2407
% Cars & Light Goods	100.0	97.1	98.6	100.0	-	97.8	99.7	98.2	100.0	-	-	98.9	100.0	97.6	97.6	-	-	97.9	97.8	98.4	98.2	-	-	98.3	98.3
Buses	0	5	0	0	-	5	1	2	0	0	-	3	0	4	5	0	-	9	1	2	1	0	-	4	21
% Buses	0.0	1.2	0.0	0.0	-	0.9	0.3	0.5	0.0	-	-	0.4	0.0	1.6	2.0	-	-	1.5	1.1	0.6	1.8	-	-	0.9	0.9
Single-Unit Trucks	0	5	1	0	-	6	0	5	0	0	-	5	0	2	1	0	-	3	1	3	0	0	-	4	18
% Single-Unit Trucks	0.0	1.2	1.4	0.0	-	1.0	0.0	1.1	0.0	-	-	0.6	0.0	0.8	0.4	-	-	0.5	1.1	0.9	0.0	-	-	0.9	0.7
Articulated Trucks	0	2	0	0	-	2	0	1	0	0	-	1	0	0	0	0	-	0	0	0	0	0	-	0	3
% Articulated Trucks	0.0	0.5	0.0	0.0	-	0.3	0.0	0.2	0.0	-	-	0.1	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.1
Bicycles on Road	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0	0	0	0	-	0	0
% Bicycles on Road	0.0	0.0	0.0	0.0	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0	0.0	0.0	-	-	0.0	0.0
Bicycles on Crosswalk	-	-	-	-	0	-	-	-	-	-	0	-	-	-	-	-	1	-	-	-	-	-	0	-	-
% Bicycles on Crosswalk	-	-	-	-	0.0	-	-	-	-	-	0.0	-	-	-	-	-	3.1	-	-	-	-	-	0.0	-	-
Pedestrians	-	-	-	-	23	-	-	-	-	-	17	-	-	-	-	-	31	-	-	-	-	-	15	-	-
% Pedestrians	-	-	-	-	100.0	-	-	-	-	-	100.0	-	-	-	-	-	96.9	-	-	-	-	-	100.0	-	-


Turning Movement Peak Hour Data Plot (4:00 PM)


Appendix C

AutoTURN Analysis



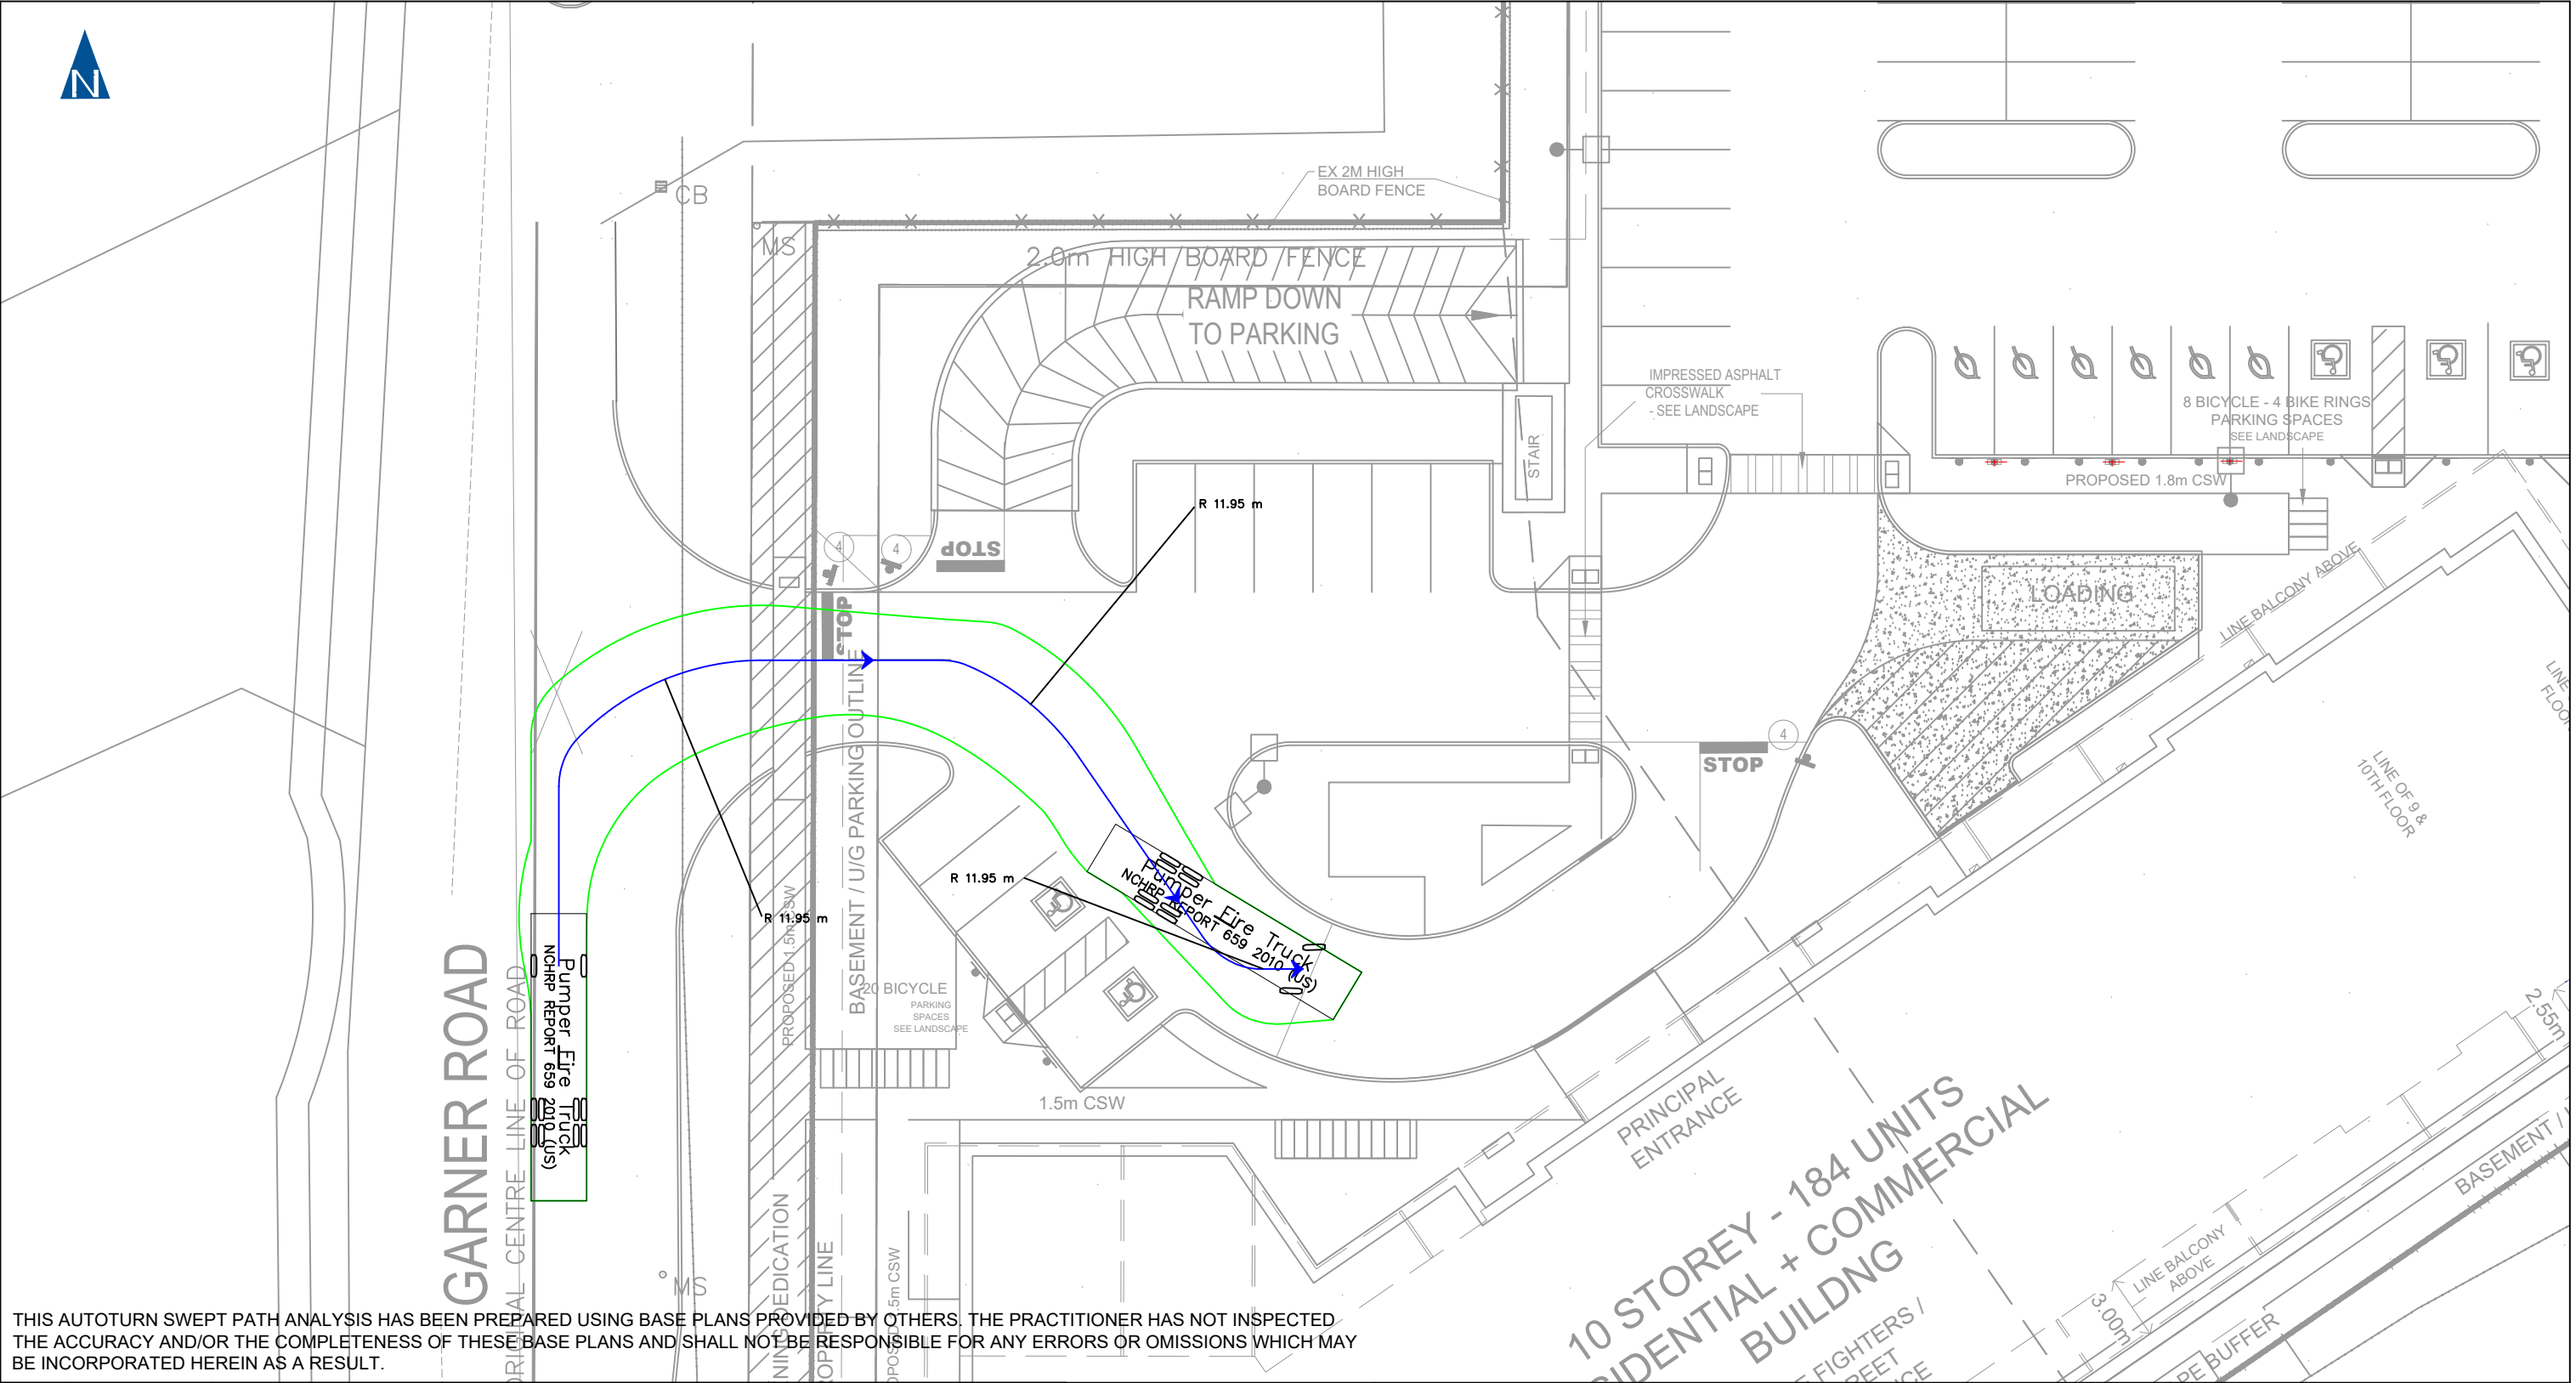

				DESIGN VEHICLE:  Pumper Fire Truck meters Width: 2.59 Track: 2.59 Lock to Lock Time: 6.0 Steering Angle: 37.8	AUTOTURN ASSESSMENT 8885-8911 LUNDY'S LANE				
2	2023-06-27	LC	UPDATED SITE PLAN						
1	2023-06-22	LC	UPDATED SITE PLAN						
NO.	DATE	INITIAL	REVISION DETAIL		PROJECT NO.: 220571	DATE: APRIL 2023	SCALE: 1:1000	DRAWING NO.: 01	
					DRAWN: SC	DESIGN: SC	CHECK: AMa		

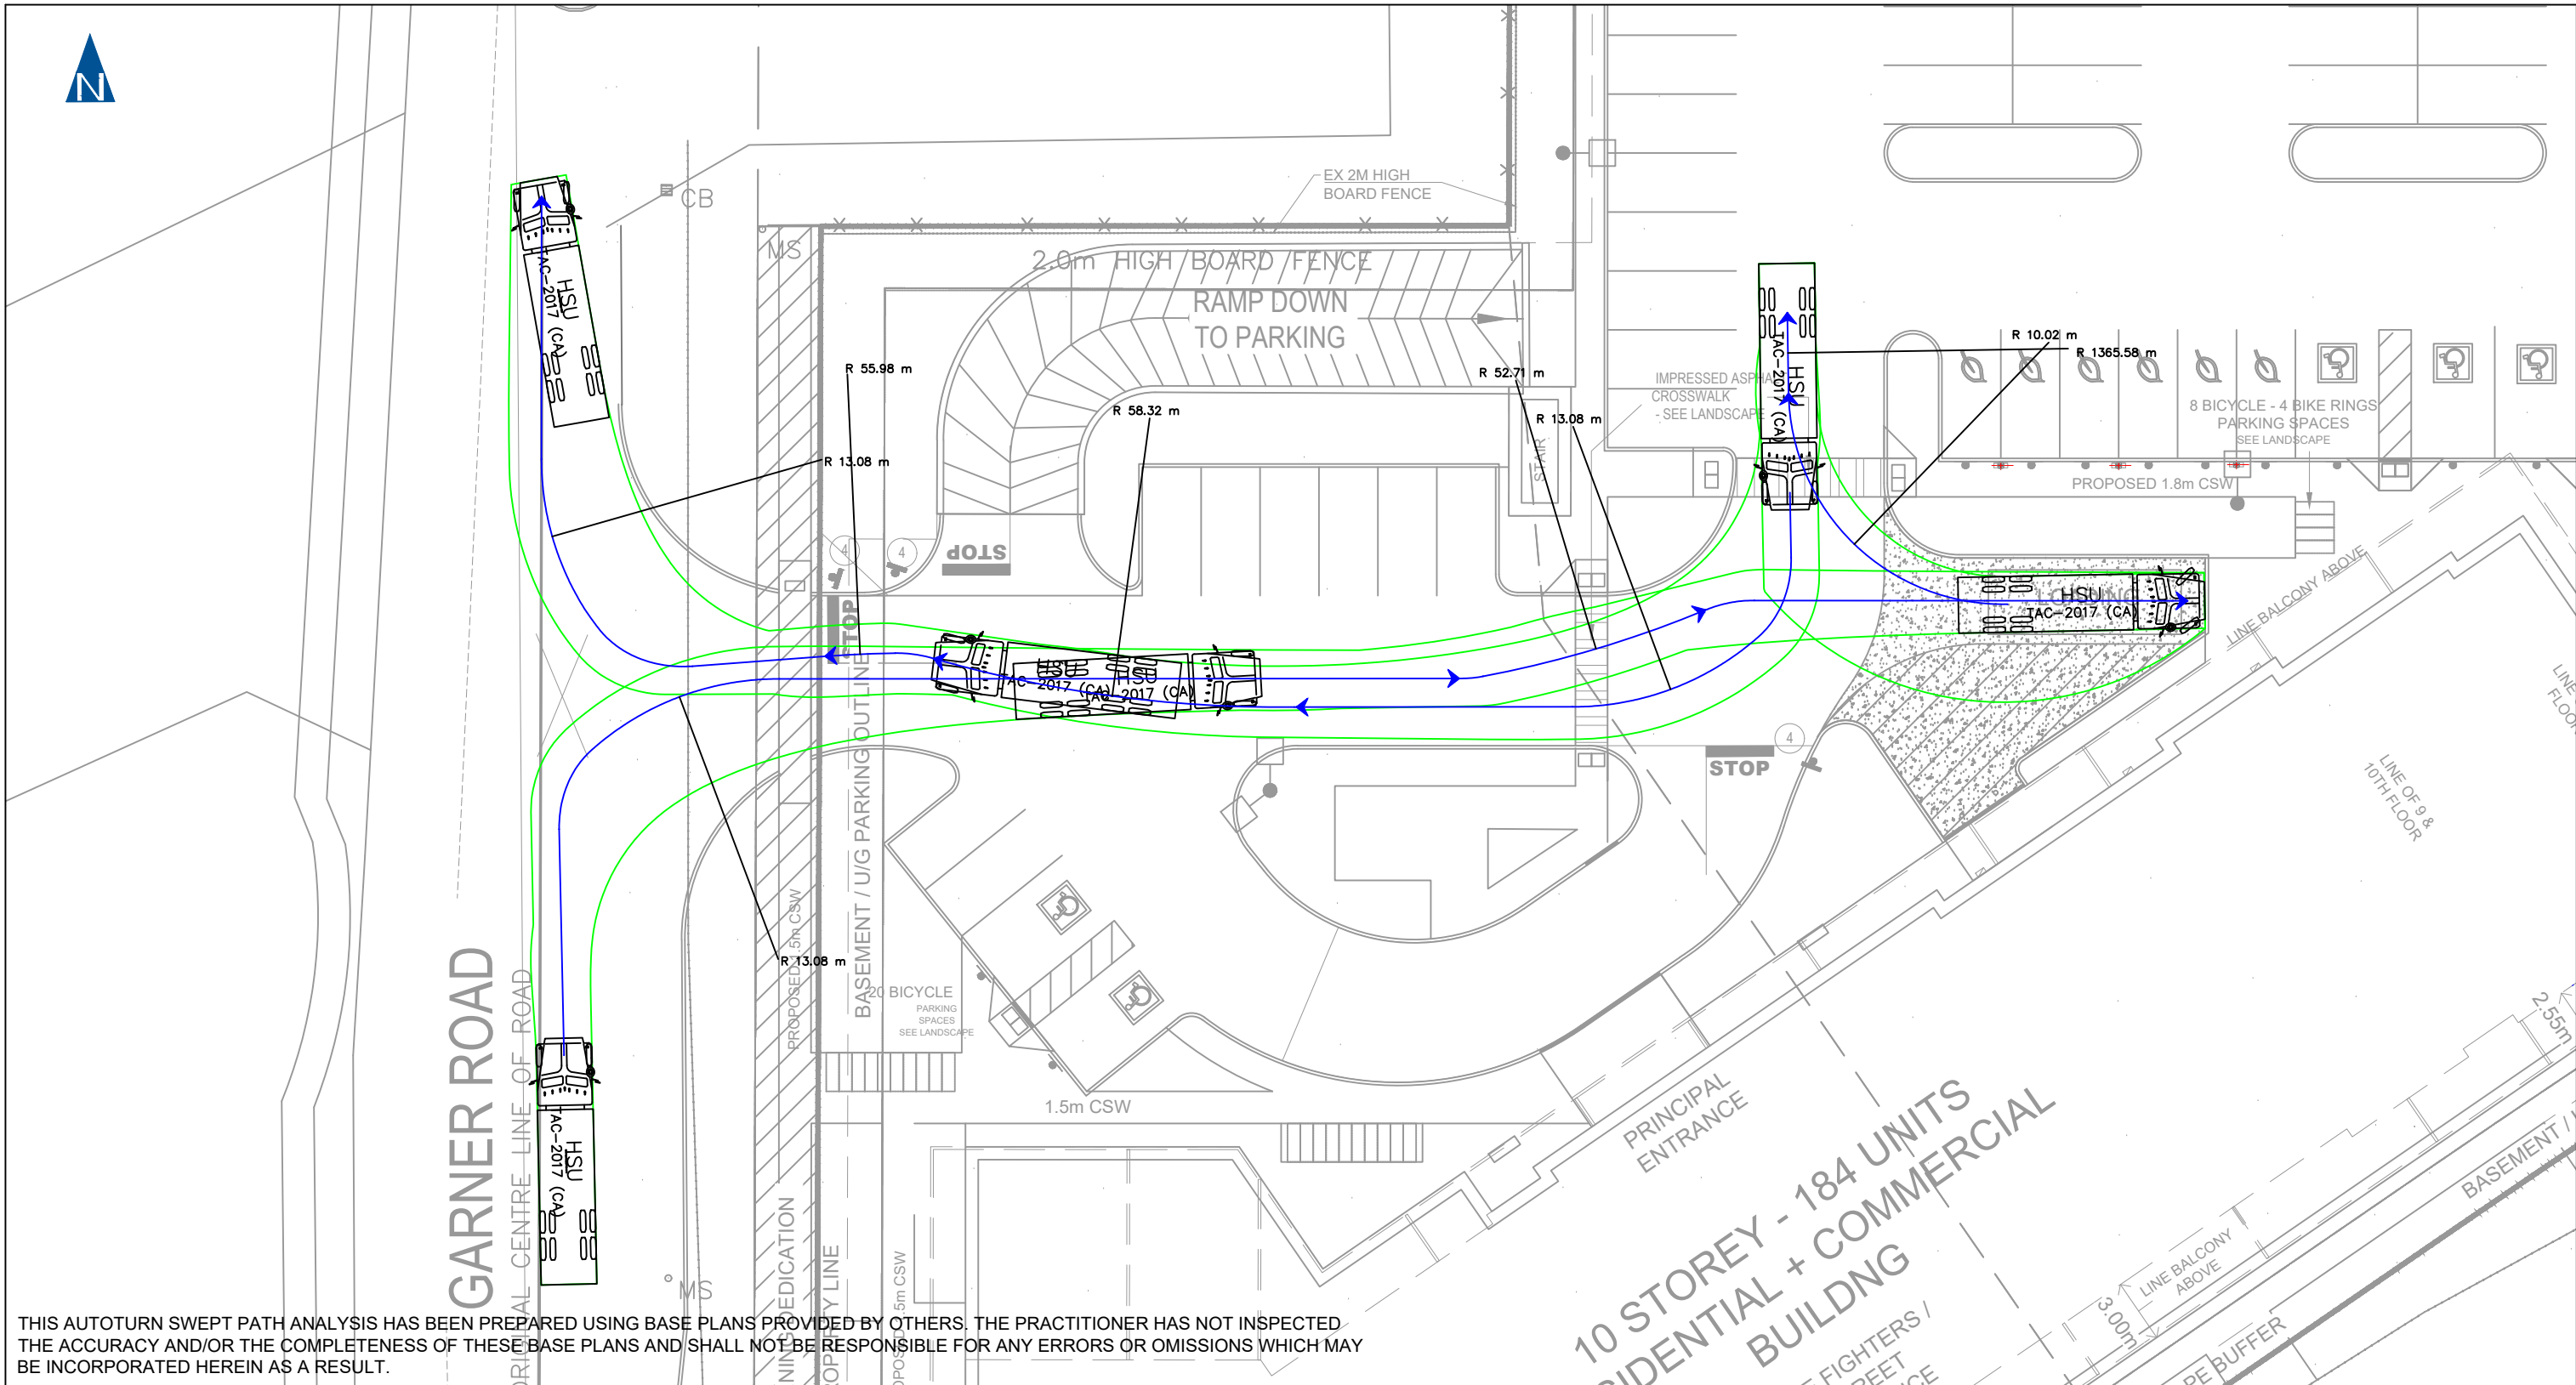

THIS AUTOTURN SWEEP PATH ANALYSIS HAS BEEN PREPARED USING BASE PLANS PROVIDED BY OTHERS. THE PRACTITIONER HAS NOT INSPECTED THE ACCURACY AND/OR THE COMPLETENESS OF THESE BASE PLANS AND SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS WHICH MAY BE INCORPORATED HEREIN AS A RESULT.

NO.	DATE	INITIAL	REVISION DETAIL
2	2023-06-27	LC	UPDATED SITE PLAN
1	2023-06-22	LC	UPDATED SITE PLAN

DESIGN VEHICLE:


HSU

Width	2.60
Track	2.60
Lock to Lock Time	6.0
Steering Angle	40.0

AUTOTURN ASSESSMENT

8885-8911 LUNDY'S LANE


PROJECT NO.: 220571	DATE: APRIL 2023	SCALE: 1:1000	DRAWING NO.: 02
DRAWN: SC	DESIGN: SC	CHECK: AMa	

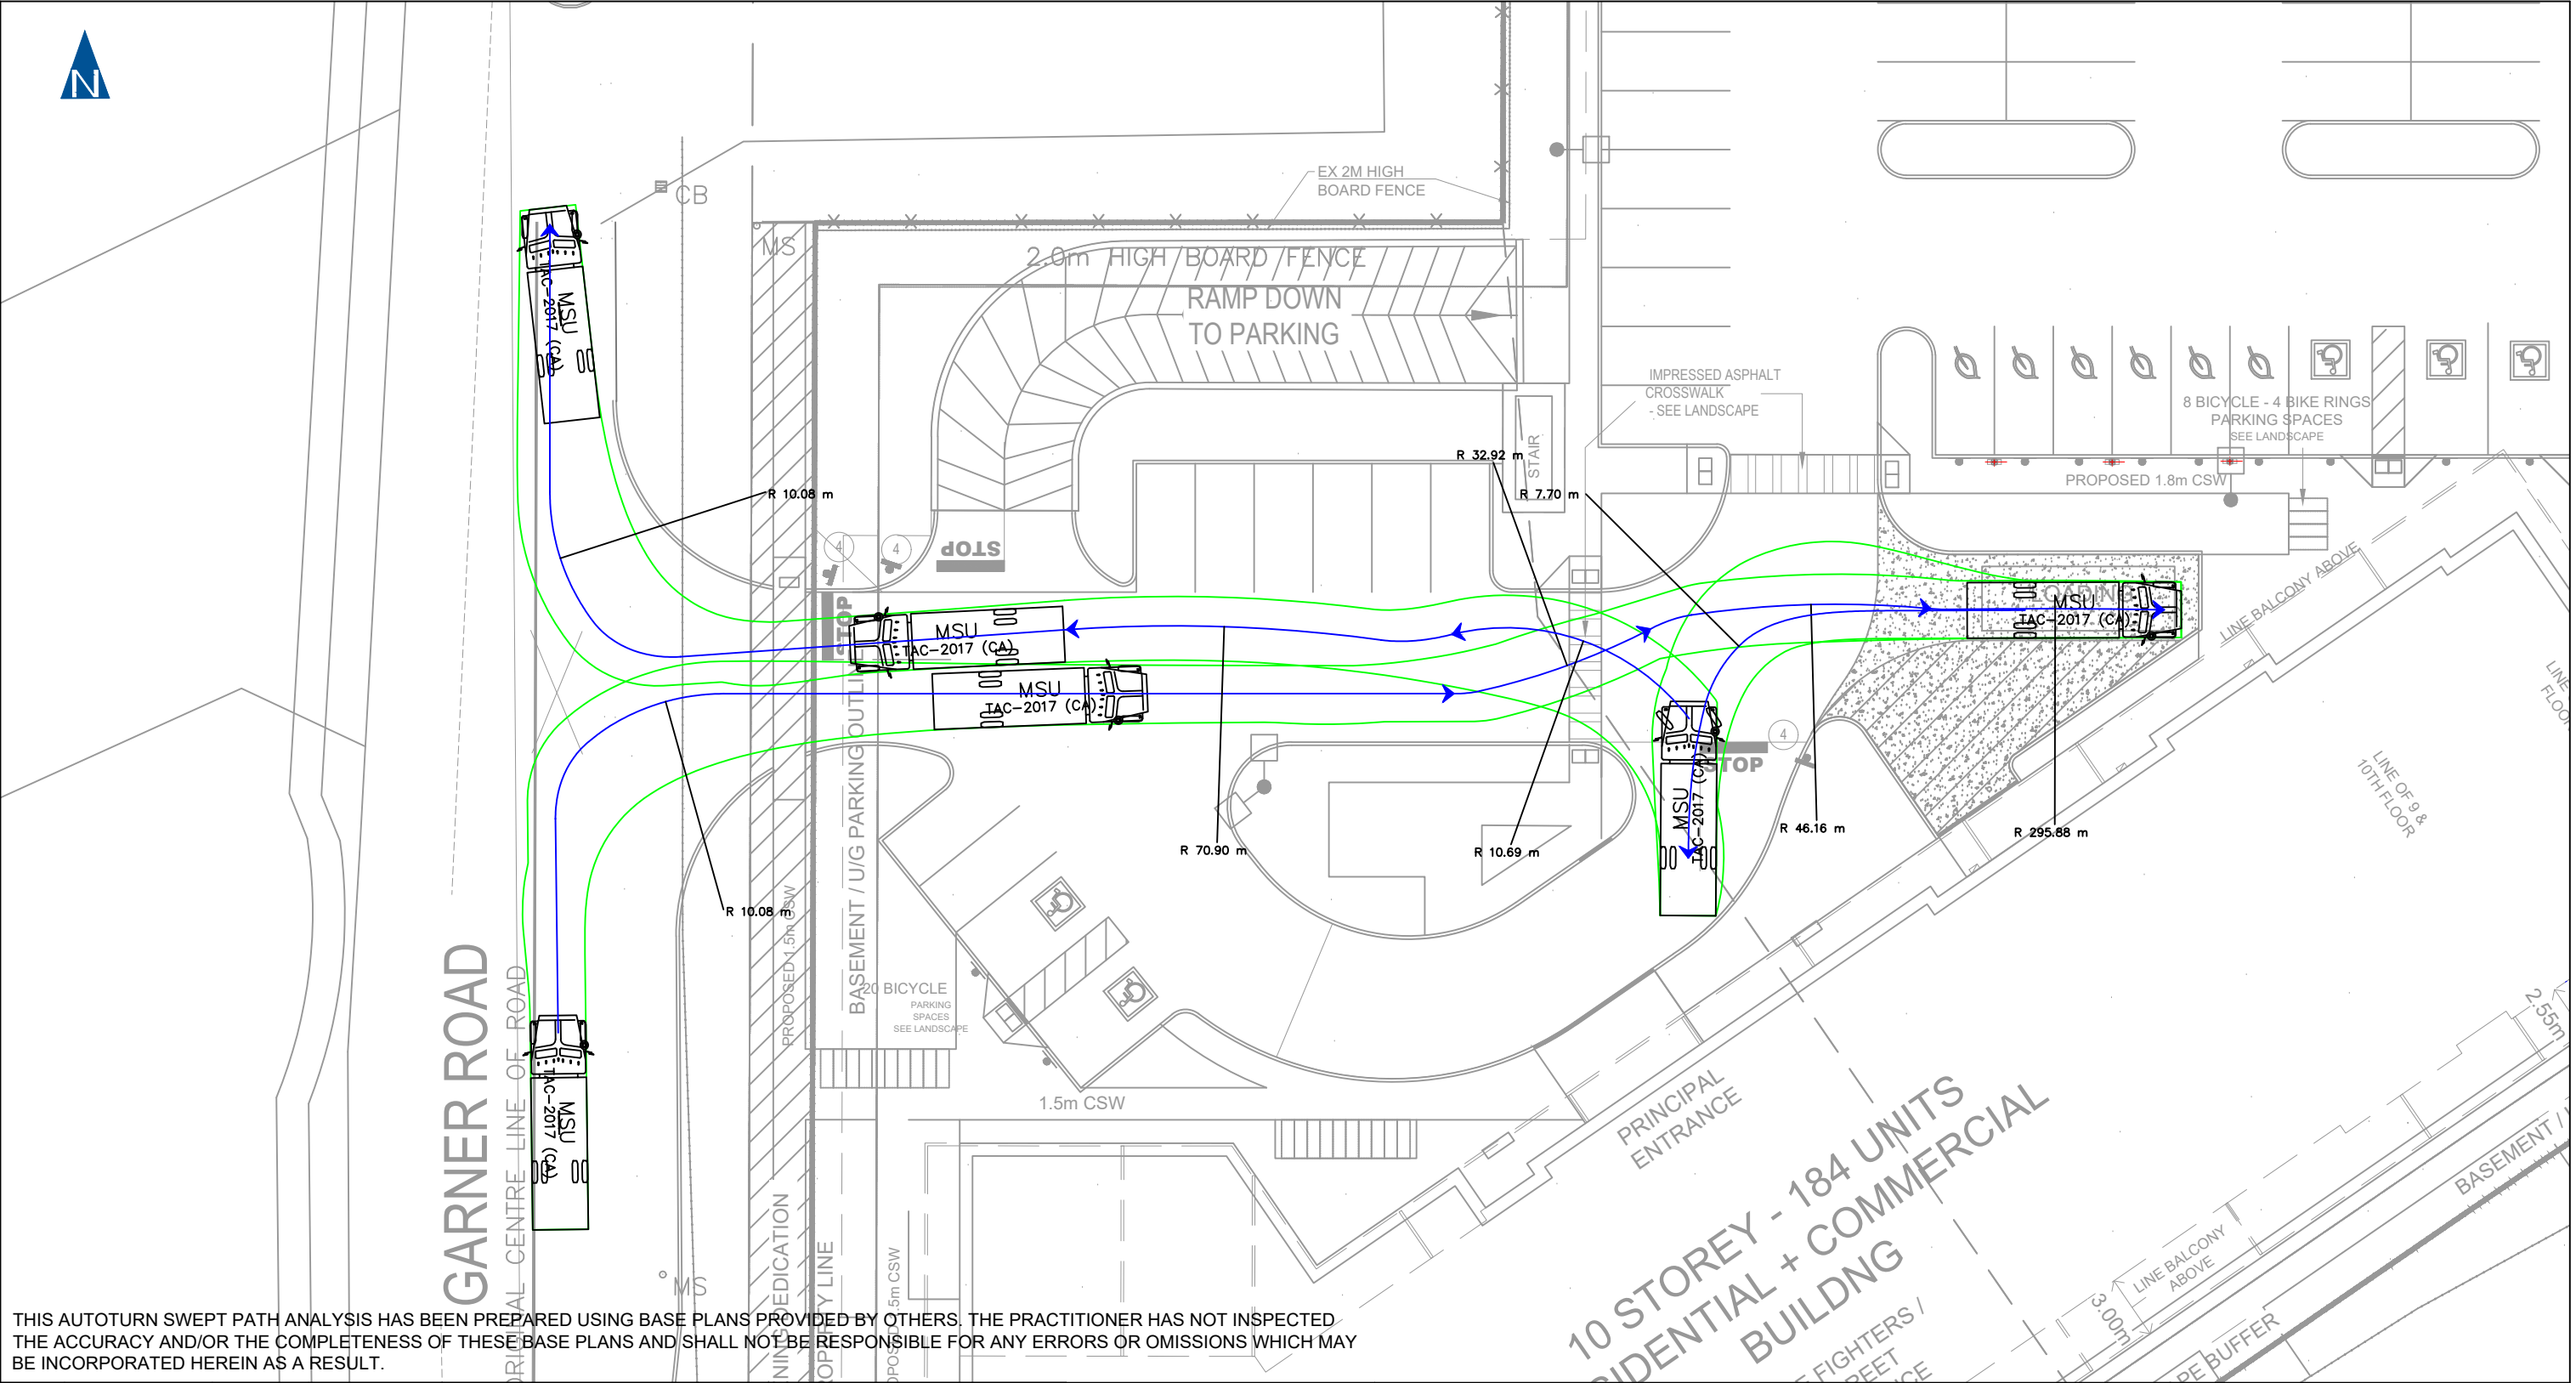

THIS AUTOTURN SWEEP PATH ANALYSIS HAS BEEN PREPARED USING BASE PLANS PROVIDED BY OTHERS. THE PRACTITIONER HAS NOT INSPECTED THE ACCURACY AND/OR THE COMPLETENESS OF THESE BASE PLANS AND SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS WHICH MAY BE INCORPORATED HEREIN AS A RESULT.

2	2023-06-27	LC	UPDATED SITE PLAN
1	2023-06-22	LC	UPDATED SITE PLAN
NO.	DATE	INITIAL	REVISION DETAIL

DESIGN VEHICLE:




MSU

Width : 2.60
Track : 2.60
Lock to Lock Time : 6.0
Steering Angle : 40.2

AUTOTURN ASSESSMENT
8885-8911 LUNDY'S LANE


PROJECT NO.: 220571	DATE: APRIL 2023	SCALE: 1:1000	DRAWING NO.: 04
DRAWN: SC	DESIGN: SC	CHECK: AMa	

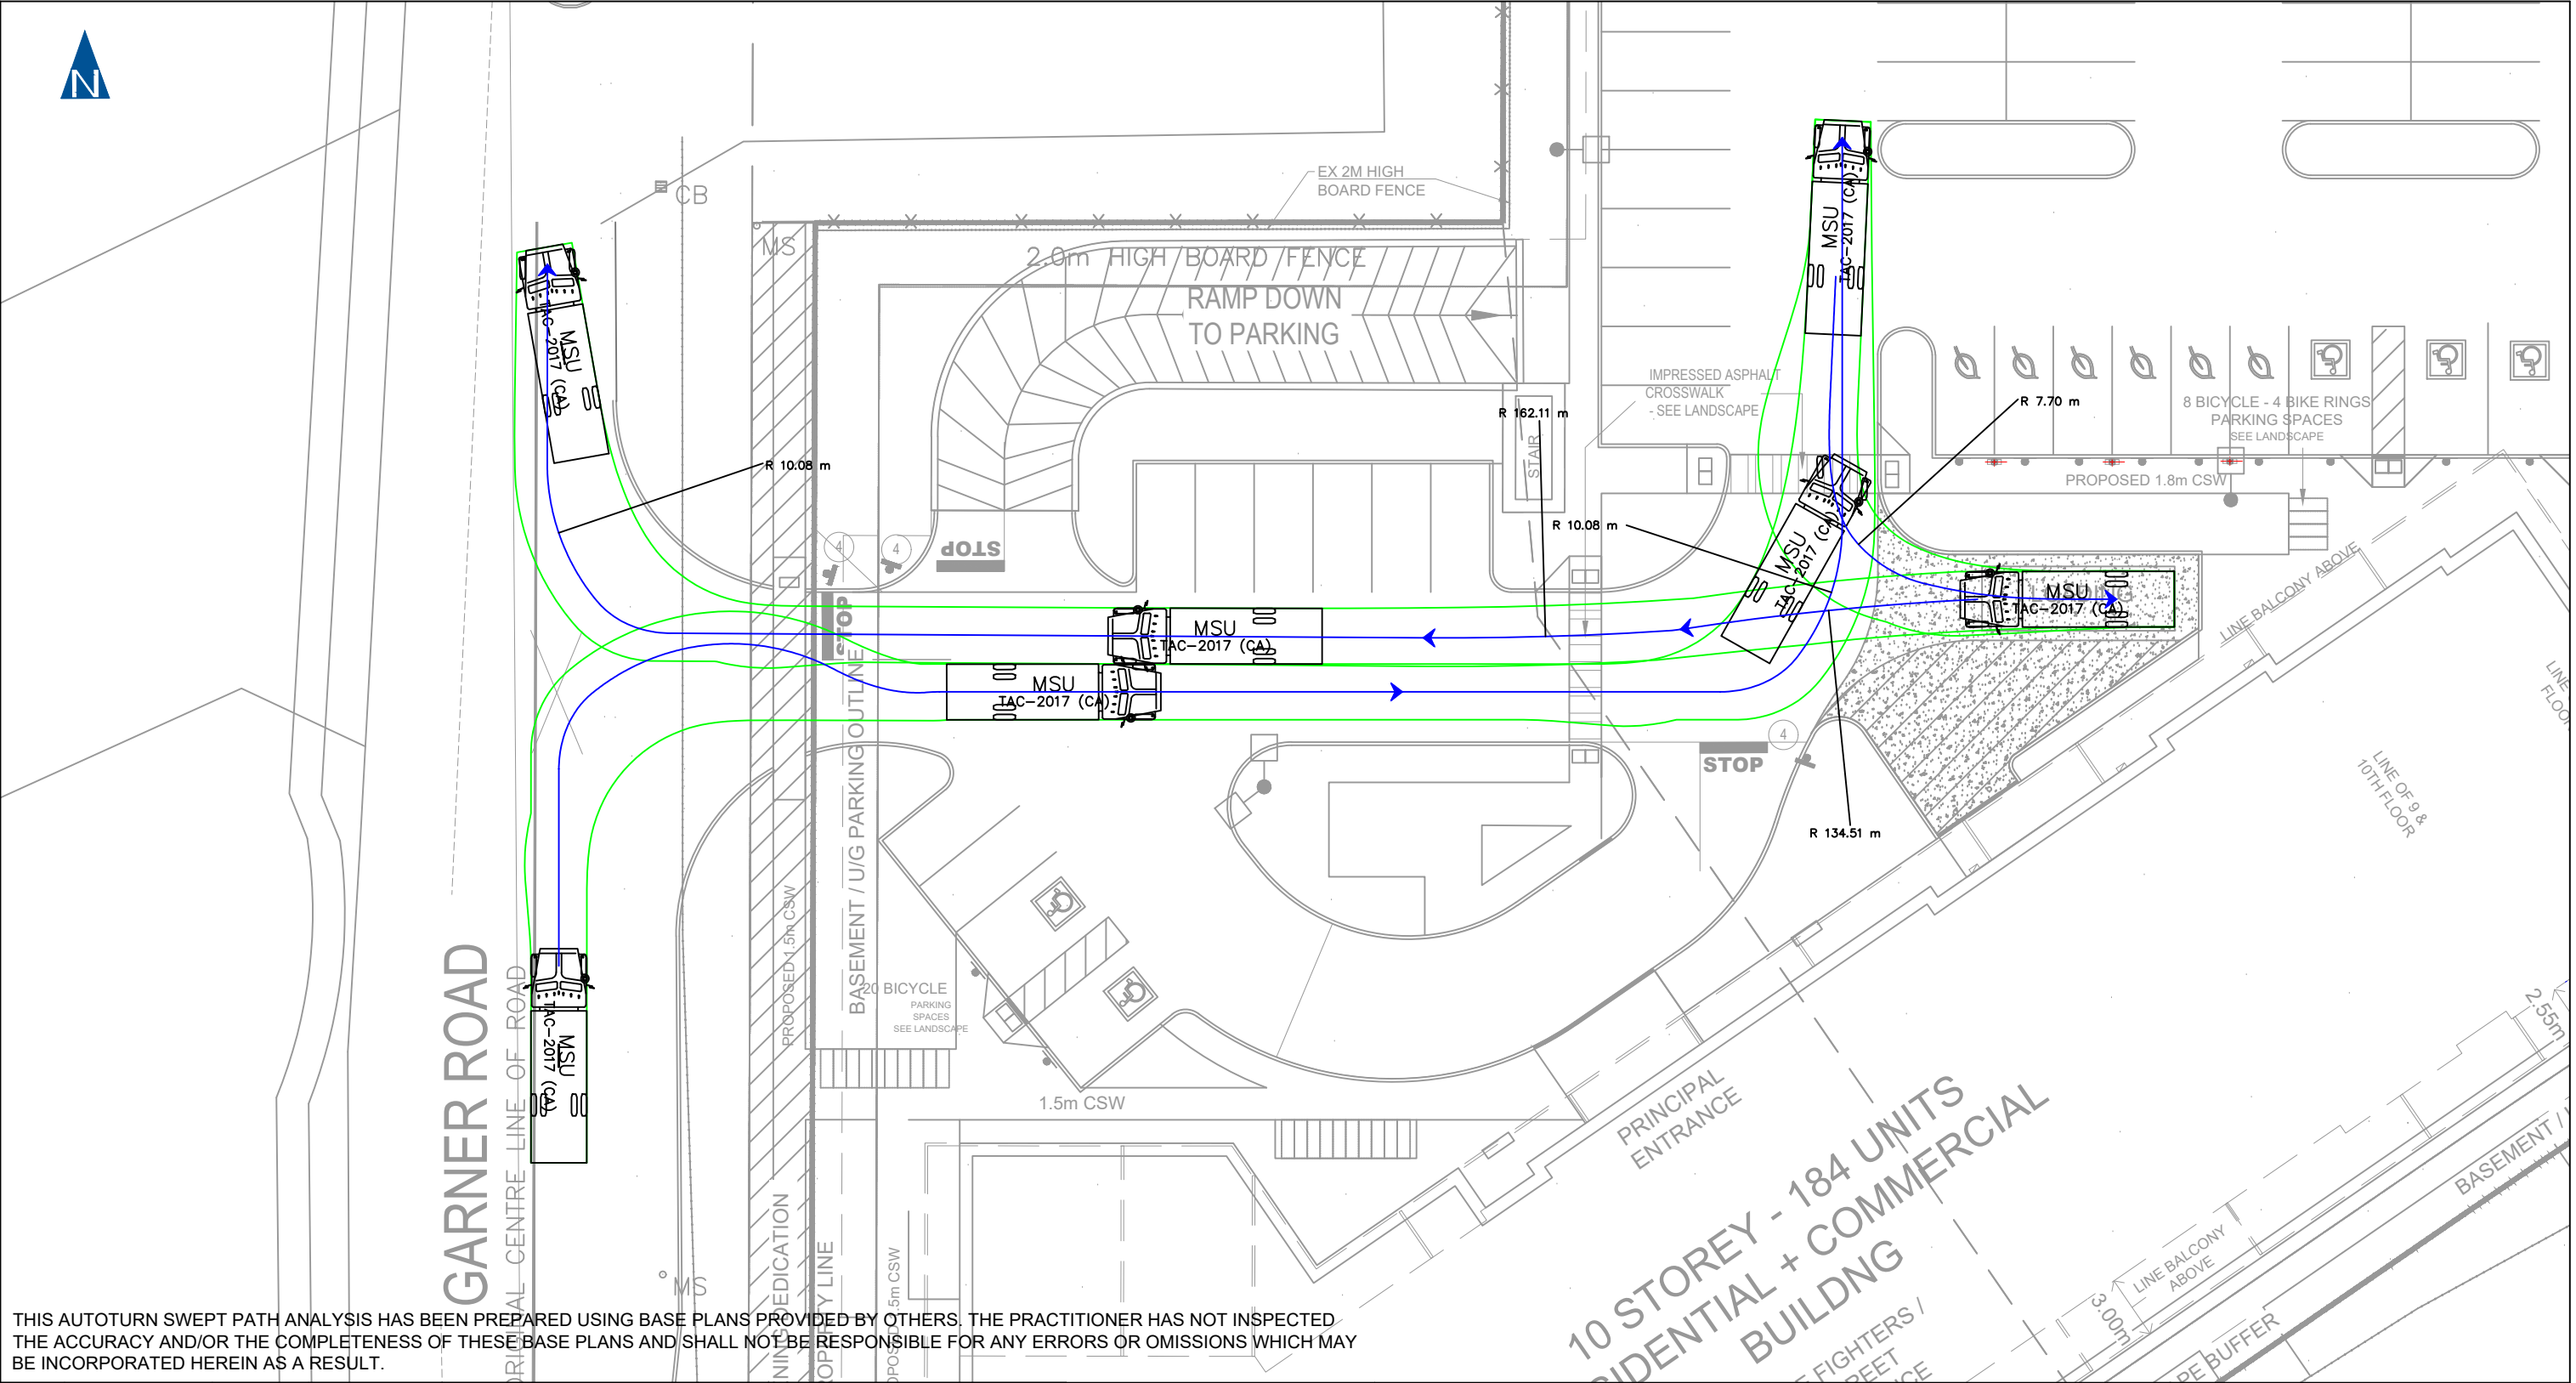

THIS AUTOTURN SWEEP PATH ANALYSIS HAS BEEN PREPARED USING BASE PLANS PROVIDED BY OTHERS. THE PRACTITIONER HAS NOT INSPECTED THE ACCURACY AND/OR THE COMPLETENESS OF THESE BASE PLANS AND SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS WHICH MAY BE INCORPORATED HEREIN AS A RESULT.

NO.	DATE	INITIAL	REVISION DETAIL
2	2023-06-27	LC	UPDATED SITE PLAN
1	2023-06-22	LC	UPDATED SITE PLAN

DESIGN VEHICLE:




MSU

Width : 2.60
Track : 2.60
Lock to Lock Time : 6.0
Steering Angle : 40.2

AUTOTURN ASSESSMENT 8885-8911 LUNDY'S LANE


PROJECT NO.: 220571	DATE: APRIL 2023	SCALE: 1:1000	DRAWING NO.: 05
DRAWN: SC	DESIGN: SC	CHECK: AMa	

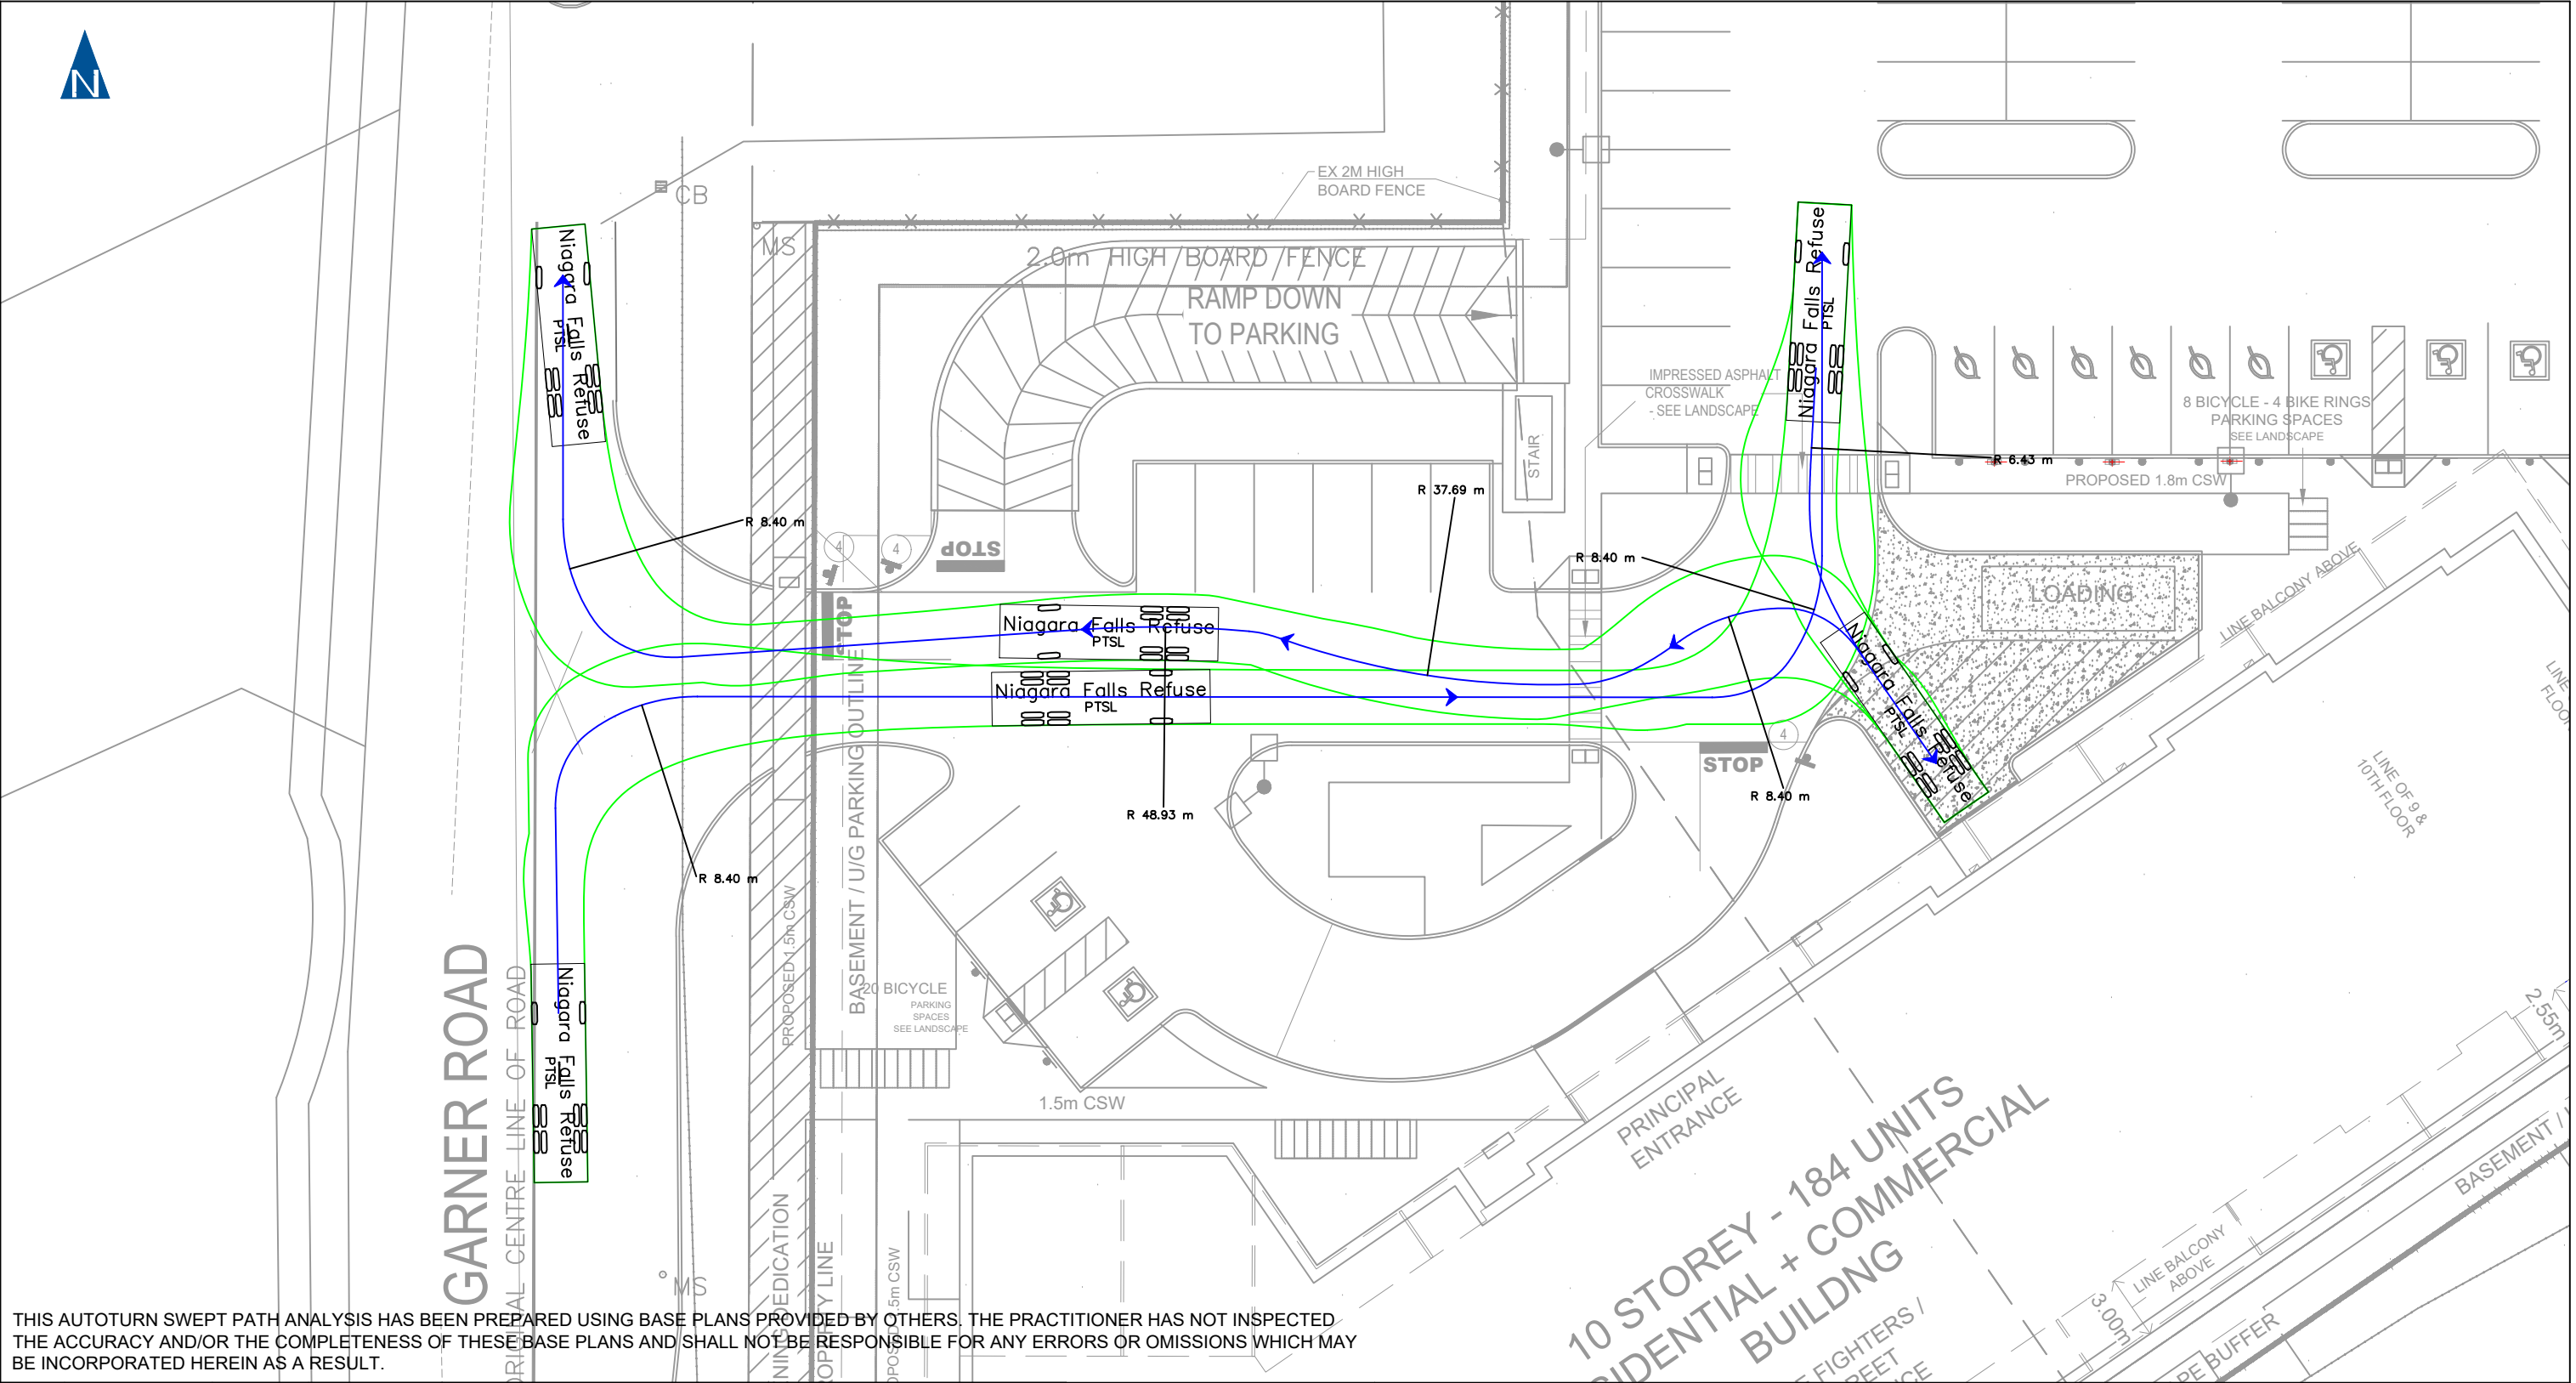

THIS AUTOTURN SWEEP PATH ANALYSIS HAS BEEN PREPARED USING BASE PLANS PROVIDED BY OTHERS. THE PRACTITIONER HAS NOT INSPECTED THE ACCURACY AND/OR THE COMPLETENESS OF THESE BASE PLANS AND SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS WHICH MAY BE INCORPORATED HEREIN AS A RESULT.

2	2023-06-27	LC	UPDATED SITE PLAN
1	2023-06-22	LC	UPDATED SITE PLAN
NO.	DATE	INITIAL	REVISION DETAIL

DESIGN VEHICLE:



Niagara Falls Refuse

Width : 2.50
Track : 2.50
Lock to Lock Time : 6.0
Steering Angle : 41.4

AUTOTURN ASSESSMENT
8885-8911 LUNDY'S LANE

PROJECT NO.: 220571

DATE: APRIL 2023

SCALE: 1:1000


DRAWING NO.:

DRAWN: SC


DESIGN: SC

CHECK: AMa

06

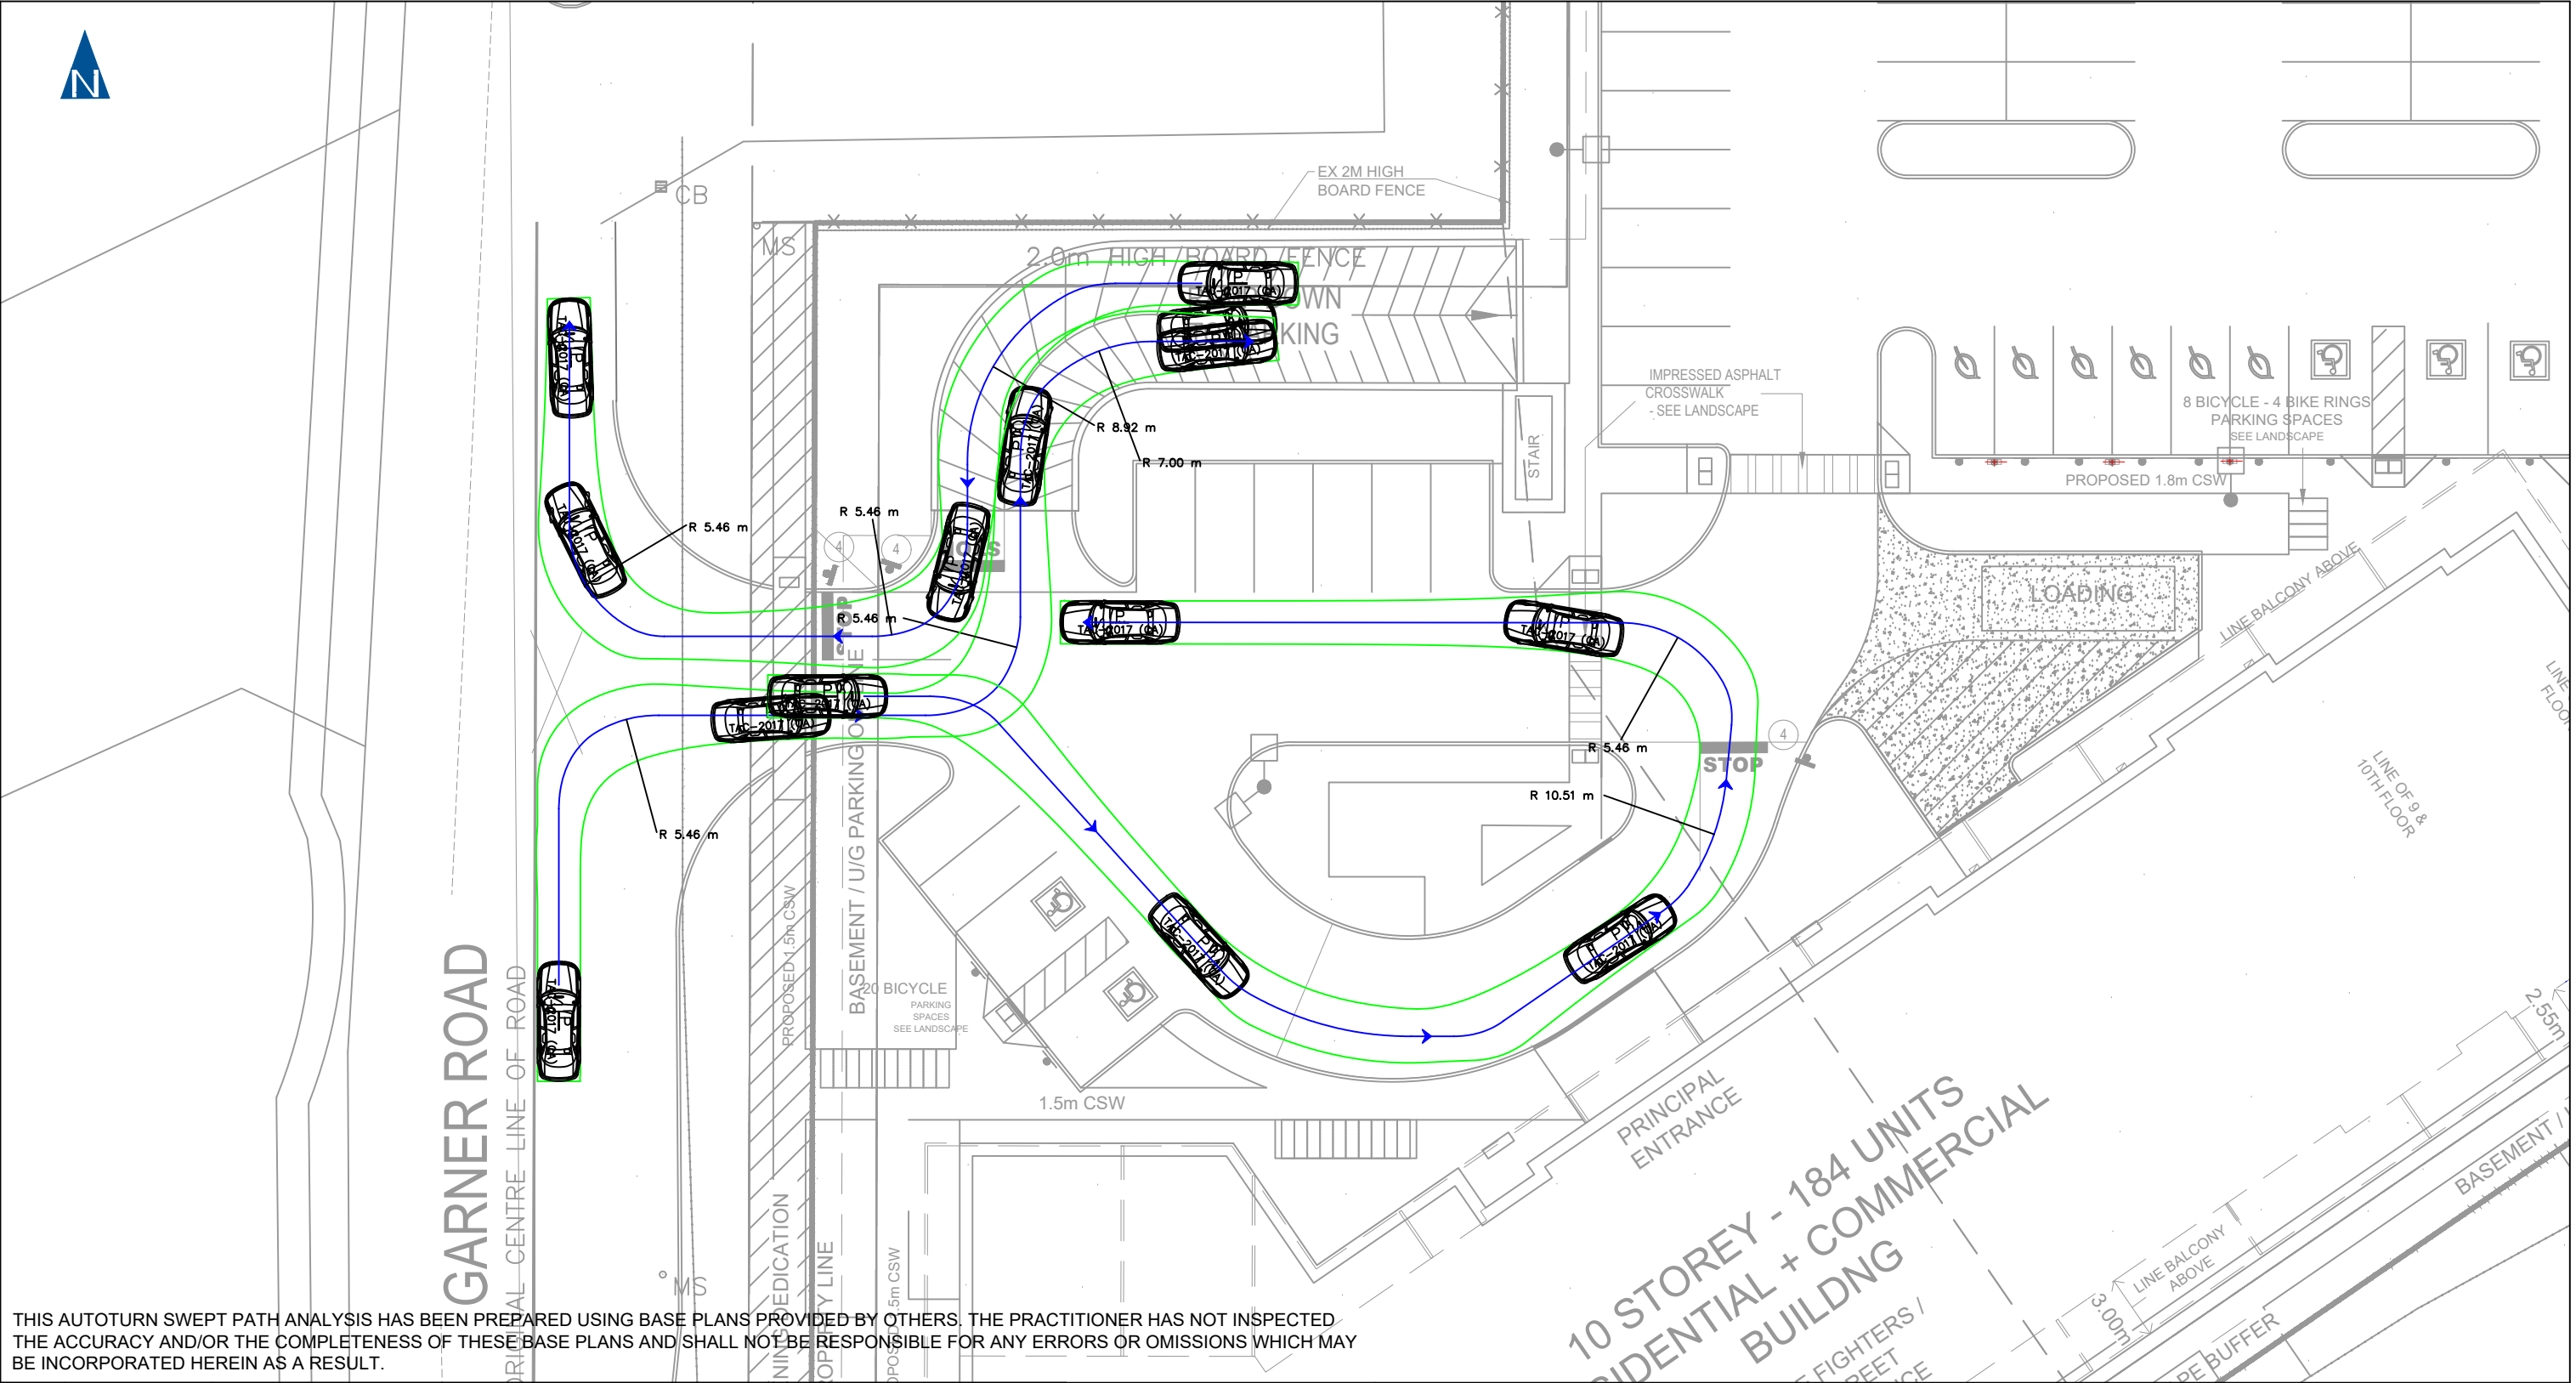

THIS AUTOTURN SWEEP PATH ANALYSIS HAS BEEN PREPARED USING BASE PLANS PROVIDED BY OTHERS. THE PRACTITIONER HAS NOT INSPECTED THE ACCURACY AND/OR THE COMPLETENESS OF THESE BASE PLANS AND SHALL NOT BE RESPONSIBLE FOR ANY ERRORS OR OMISSIONS WHICH MAY BE INCORPORATED HEREIN AS A RESULT.

				DESIGN VEHICLE:  P Width Track Lock to Lock Time Steering Angle : 2.00 : 2.00 : 6.0 : 35.9 meters	AUTOTURN ASSESSMENT 8885-8911 LUNDY'S LANE				
2	2023-06-27	LC	UPDATED SITE PLAN						
1	2023-06-22	LC	UPDATED SITE PLAN			PROJECT NO.: 220571	DATE: APRIL 2023	SCALE: 1:1000	DRAWING NO.: 07
NO.	DATE	INITIAL	REVISION DETAIL			DRAWN: SC	DESIGN: SC	CHECK: AMa	

Appendix D

Operations Reports



Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

AM BASE
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group												
Lane Configurations												
Traffic Volume (vph)	4	99	10	15	103	28	36	170	35	22	70	4
Future Volume (vph)	4	99	10	15	103	28	36	170	35	22	70	4
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.981			0.970			0.977				0.991	
Fr Protected	0.996			0.995			0.991				0.988	
Satd. Flow (prot)	0	1628	0	0	1652	0	0	1642	0	0	1633	0
Fr Permitted	0.996			0.995			0.991				0.988	
Satd. Flow (perm)	0	1628	0	0	1652	0	0	1642	0	0	1633	0
Link Speed (k/h)	80			80			60				60	
Link Distance (m)	133.8			190.3			256.3				275.8	
Travel Time (s)	6.0			8.6			15.4				16.5	
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Heavy Vehicles (%)	25%	2%	10%	0%	1%	7%	0%	2%	11%	0%	7%	0%
Adj. Flow (vph)	12	113	20	16	112	36	52	195	52	28	84	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	145	0	0	164	0	0	299	0	0	120	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	0.0			0.0			0.0			0.0		0.0
Link Offset(m)	0.0			0.0			0.0			0.0		0.0
Crosswalk Width(m)	4.8			4.8			4.8			4.8		4.8
Two way Left Turn Lane												
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	25			15			15			25		15
Sign Control	Stop			Stop			Stop			Stop		Stop
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	38.5%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

AM BASE
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement												
Lane Configurations												
Sign Control												
Traffic Volume (vph)	4	99	10	15	103	28	36	170	35	22	70	4
Future Volume (vph)	4	99	10	15	103	28	36	170	35	22	70	4
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Hourly flow rate (vph)	12	112	20	16	112	36	52	195	52	28	84	8
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	144	164	299	120								
Volume Left (vph)	12	16	52	28								
Volume Right (vph)	20	36	52	8								
Head (s)	0.02	-0.07	-0.01	0.09								
Departure Headway (s)	5.2	5.1	4.9	5.2								
Degree Utilization, x	0.21	0.23	0.41	0.17								
Capacity (veh/h)	623	640	700	628								
Control Delay (s)	9.6	9.7	11.2	9.3								
Approach Delay (s)	9.6	9.7	11.2	9.3								
Approach LOS	A	A	B	A								
Intersection Summary												
Delay	10.2											
Level of Service	B											
Intersection Capacity Utilization	38.5%											
Analysis Period (min)	15											
ICU Level of Service	A											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM BASE
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	16	327	19	18	269	47	23	107	40	60	46	22
Future Volume (vph)	16	327	19	18	269	47	23	107	40	60	46	22
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00			1.00								
Flt Protected	0.950			0.950		0.975		0.950		0.950		0.945
Satd Flow (prot)	1471	3197	0	1662	3054	0	1662	1609	0	1564	1633	0
Flt Permitted	0.539		0.531				0.700			0.650		
Satd Flow (perm)	835	3197	0	928	3054	0	1225	1609	0	1063	1633	0
Right Turn on Red		Yes			Yes		Yes		Yes		Yes	
Satd Flow (RTOR)	14		49		50		60		60		32	
Link Speed (km/h)	50		50		236.3		252.8		159.5		159.5	
Link Distance (m)	232.7		16.8		17.0		15.2		9.6		9.6	
Travel Time (s)												
Confl. Peds. (#/hr)		1										
Peak Hour Factor	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Heavy Vehicles (%)	13%	3%	0%	7%	2%	0%	1%	8%	7%	2%	0%	3%
Adj. Flow (vph)	24	348	24	44	296	60	32	113	56	72	56	32
Shared Lane Traffic (%)												
Lane Group Flow (vph)	24	372	0	44	355	0	32	169	0	72	88	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6		3.6		3.6		3.6		3.6		3.6	
Link Offset(m)	0.0		0.0		0.0		0.0		0.0		0.0	
Crosswalk Width(m)	4.8		4.8		4.8		4.8		4.8		4.8	
Two way Left Turn Lane												
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	25	15	25	15	25	15	25	15	25	15	25	15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Leading Detector (m)	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4		9.4		9.4		9.4		9.4		9.4	
Detector 2 Size(m)	0.6		0.6		0.6		0.6		0.6		0.6	
Detector 2 Type	Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM BASE
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases												
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase												
Switch Phase	10.0	10.0		10.0	10.0		8.0	8.0		8.0	8.0	8.0
Minimum Initial (s)	27.0	27.0		27.0	27.0		36.8	36.8		36.8	36.8	36.8
Minimum Split (s)	37.0	37.0		37.0	37.0		27.8	27.8		27.8	27.8	27.8
Total Split (s)	57.1%	57.1%		57.1%	57.1%		42.9%	42.9%		42.9%	42.9%	42.9%
Total Split (%)	30.0	30.0		30.0	30.0		20.0	20.0		20.0	20.0	20.0
Maximum Green (s)	4.5	4.5		4.5	4.5		4.5	4.5		4.5	4.5	4.5
Yellow Time (s)	2.5	2.5		2.5	2.5		3.3	3.3		3.3	3.3	3.3
All-Red Time (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	0.0
Lost Time Adjust (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	7.8
Total Lost Time (s)												
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	2.5	2.5		2.5	2.5		2.5	2.5		2.5	2.5	2.5
Recall Mode	None	None		None	None		Max	Max		Max	Max	Max
Walk Time (s)	8.0	8.0		8.0	8.0		11.0	11.0		11.0	11.0	11.0
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		18.0	18.0		18.0	18.0	18.0
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	0
Act Effct Green (s)	11.5	11.5		11.5	11.5		29.0	29.0		29.0	29.0	29.0
Actuated g/C Ratio	0.21	0.21		0.21	0.21		0.52	0.52		0.52	0.52	0.52
v/c Ratio	0.14	0.55		0.23	0.53		0.05	0.20		0.13	0.10	0.10
Control Delay	19.7	22.2		21.3	19.8		7.3	6.4		8.0	5.4	5.4
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Delay	19.7	22.2		21.3	19.8		7.3	6.4		8.0	5.4	5.4
LOS	B	C		C	B		A	A		A	A	A
Approach Delay	22.0			19.9			6.5			6.6		
Approach LOS	C			B			A			A		
Queue Length 50th (m)	2.1	17.8		3.9	15.1		1.4	6.1		3.4	2.5	
Queue Length 95th (m)	5.3	29.1		4.7	25.9		4.2	16.3		9.1	7.9	
Internal Link Dist (m)	208.7			212.3			228.8			135.5		
Turn Bay Length (m)	35.0			30.0			15.0			15.0		
Base Capacity (vph)	453	1742		503	1680		643	863		557	872	
Sanctuary Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.05	0.21		0.09	0.21		0.05	0.20		0.13	0.10	
Intersection Summary	Other											
Area Type:	Other											
Cycle Length:	64.8											
Actuated Cycle Length:	55.3											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.55											
Intersection Signal Delay:	16.5											
Intersection LOS:	B											
Intersection Capacity Utilization	50.5%											
ICU Level of Service	A											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	2	2	1	2	2	1	2	2	1	2	2
Traffic Volume (vph)	16	327	19	18	269	47	23	107	40	60	46	22
Future Volume (vph)	16	327	19	18	269	47	23	107	40	60	46	22
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.99	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.95
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1471	3199	1661	3053	1661	3053	1662	1610	1554	1634	1634	1634
Flt Permitted	0.54	1.00	0.53	1.00	0.70	1.00	0.70	1.00	0.65	1.00	0.65	1.00
Satd. Flow (perm)	834	3199	928	3053	1225	1610	1064	1634	1064	1634	1064	1634
Peak-Hour factor, PHF	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Adj. Flow (vph)	24	348	24	44	296	60	32	113	56	72	56	32
RTOR Reduction (vph)	0	11	0	0	39	0	0	19	0	0	15	0
Lane Group Flow (vph)	24	361	0	44	317	0	32	150	0	72	73	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4	4	4	8	8	8	2	2	2	2	2	2
Permitted Phases	4	4	4	8	8	8	2	2	2	2	2	2
Actuated Green, G (s)	11.5	11.5	11.5	11.5	11.5	11.5	29.0	29.0	29.0	29.0	29.0	29.0
Effective Green, g (s)	11.5	11.5	11.5	11.5	11.5	11.5	29.0	29.0	29.0	29.0	29.0	29.0
Actuated g/C Ratio	0.21	0.21	0.21	0.21	0.21	0.21	0.52	0.52	0.52	0.52	0.52	0.52
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	173	665	192	634	642	844	557	856	557	856	557	856
v/s Ratio Prot	c0.11	c0.11	c0.11	0.10	0.10	0.10	c0.09	c0.09	c0.09	c0.09	c0.09	c0.09
v/c Ratio	0.03	0.14	0.54	0.23	0.50	0.05	0.03	0.18	0.13	0.07	0.13	0.09
Uniform Delay, d1	17.9	19.6	18.2	19.4	6.4	6.9	6.7	6.5	6.7	6.5	6.7	6.5
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	0.7	0.4	0.5	0.1	0.1	0.5	0.5	0.2	0.5	0.2	0.2
Delay (s)	18.1	20.3	18.7	19.8	6.6	7.4	7.2	7.2	7.2	7.2	7.2	6.7
Level of Service	B	C	B	B	B	A	A	A	A	A	A	A
Approach Delay (s)	20.1	19.7	19.7	19.7	19.7	19.7	7.2	7.2	7.2	7.2	7.2	6.9
Approach LOS	C	C	C	B	B	B	A	A	A	A	A	A
Intersection Summary												
HCM 2000 Control Delay	15.9											
HCM 2000 Level of Service	B											
HCM 2000 Volume to Capacity ratio	0.28											
Actuated Cycle Length (s)	55.3											
Sum of lost time (s)	14.8											
Intersection Capacity Utilization	50.5%											
ICU Level of Service	A											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM BASE
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (vph)	47	338	55	147	233	44	76	212	305	80	229	43
Future Volume (vph)	47	338	55	147	233	44	76	212	305	80	229	43
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Ped Bike Factor	0.99	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.99	1.00	0.99	1.00
Frt	0.978	0.978	0.978	0.969	0.969	0.969	0.969	0.969	0.969	0.974	0.974	0.974
Flt Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1539	3068	0	1525	2984	0	1614	2917	0	1568	3144	0
Flt Permitted	0.540	0.348	0.548	0.555	0.555	0.555	0.555	0.555	0.555	0.324	0.555	0.555
Satd. Flow (perm)	868	3068	0	555	2984	0	934	2917	0	535	3144	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	16	50	26	50	26	50	308	50	26	50	308	19
Link Speed (km/h)	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9
Link Distance (m)	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8
Travel Time (s)	12	12	12	12	12	12	13	13	13	13	13	13
Confl. Peds. (#/hr)	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Peak Hour Factor	8%	5%	9%	7%	9%	3%	3%	4%	6%	2%	5%	5%
Adj. Flow (vph)	52	376	64	184	281	72	84	249	386	104	269	56
Shared Lane Traffic (%)	52	440	0	184	353	0	84	635	0	104	325	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM BASE
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Eff Green (s)	28.6	17.3	36.5	24.4	41.1	30.7	42.3	31.3	42.3	31.3	42.3	31.3
Actuated g/C Ratio	0.33	0.20	0.42	0.28	0.47	0.35	0.49	0.36	0.49	0.36	0.49	0.36
v/c Ratio	0.15	0.71	0.50	0.41	0.17	0.52	0.29	0.28	0.29	0.28	0.29	0.28
Control Delay	17.1	38.7	21.9	26.2	13.8	14.2	15.1	21.8	15.1	21.8	15.1	21.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	17.1	38.7	21.9	26.2	13.8	14.2	15.1	21.8	15.1	21.8	15.1	21.8
LOS	B	D	C	C	B	B	B	C	B	C	B	C
Approach Delay	36.4	24.7	24.7	24.7	14.2	14.2	20.1	20.1	20.1	20.1	20.1	20.1
Approach LOS	D	D	C	C	B	B	C	C	C	C	C	C
Queue Length 50th (m)	5.4	37.1	21.0	25.4	7.2	22.4	9.0	20.1	9.0	20.1	9.0	20.1
Queue Length 95th (m)	12.9	59.4	33.0	37.3	18.5	43.5	18.5	36.0	18.5	36.0	18.5	36.0
Internal Link Dist (m)	264.9	264.9	267.8	267.8	258.2	258.2	204.1	204.1	204.1	204.1	204.1	204.1
Turn Bay Length (m)	25.0	563	520	1248	563	1232	416	1147	416	1147	416	1147
Base Capacity (vph)	1277	1277	520	1248	563	1232	416	1147	416	1147	416	1147
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.09	0.34	0.35	0.28	0.15	0.52	0.25	0.28	0.25	0.28	0.25	0.28
Intersection Summary	Intersection LOS: C											
Area Type:	Other											
Cycle Length:	122											
Actuated Cycle Length:	86.6											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.71											
Intersection Signal Delay:	23.0											
Intersection Capacity Utilization	73.6%											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
103: Kalar Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (vph)	47	338	55	147	233	44	76	212	305	80	229	43
Future Volume (vph)	47	338	55	147	233	44	76	212	305	80	229	43
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.91	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1534	3071	1523	2987	1608	2917	1568	3147	1568	3147	1568	3147
Flt Permitted	0.54	1.00	0.35	1.00	0.56	1.00	0.32	1.00	0.32	1.00	0.32	1.00
Satd. Flow (perm)	873	3071	558	2987	940	2917	535	3147	535	3147	535	3147
Peak-Hour factor, PHF	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Adj. Flow (vph)	52	376	64	184	281	72	84	249	386	104	269	56
RTOR Reduction (vph)	0	13	0	0	19	0	0	200	0	0	12	0
Lane Group Flow (vph)	52	427	0	184	334	0	84	435	0	104	313	0
Confl. Peds. (#/hr)	12	12	12	12	12	12	13	13	13	13	13	13
Heavy Vehicles (%)	8%	5%	9%	9%	7%	9%	3%	3%	4%	6%	2%	5%
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	5	2	1	6	1	6	1	6
Permitted Phases	4	8	8	8	2	2	2	2	2	2	2	2
Actuated Green, G (s)	23.7	18.0	33.1	24.4	37.0	30.7	38.2	31.3	38.2	31.3	38.2	31.3
Effective Green, g (s)	23.7	18.0	33.1	24.4	37.0	30.7	38.2	31.3	38.2	31.3	38.2	31.3
Actuated g/C Ratio	0.27	0.21	0.38	0.28	0.42	0.35	0.44	0.36	0.44	0.36	0.44	0.36
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	278	630	343	831	444	1021	314	1123	314	1123	314	1123
v/s Ratio Prot	0.01	c0.14	c0.07	0.11	0.01	c0.15	c0.03	0.10	c0.03	0.10	c0.03	0.10
v/s Ratio Perm	0.04	0.13	0.13	0.13	0.07	0.07	0.12	0.12	0.12	0.12	0.12	0.12
v/c Ratio	0.19	0.68	0.54	0.40	0.19	0.43	0.33	0.28	0.33	0.28	0.33	0.28
Uniform Delay, d1	24.2	32.2	19.6	25.7	15.5	21.8	15.3	20.1	15.3	20.1	15.3	20.1
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	2.7	1.3	0.3	0.2	1.3	0.5	0.6	0.5	0.6	0.5	0.6
Delay (s)	24.4	34.9	21.0	26.0	15.6	23.1	15.7	20.8	15.7	20.8	15.7	20.8
Level of Service	C	C	C	C	B	C	B	C	B	C	B	C
Approach Delay (s)	33.8	C	24.3	C	22.2	C	19.5	C	19.5	C	19.5	C
Approach LOS	C	C	C	C	C	C	B	C	B	C	B	C
Intersection Summary												
HCM 2000 Control Delay	24.8											
HCM 2000 Level of Service	C											
HCM 2000 Volume to Capacity ratio	0.50											
Actuated Cycle Length (s)	87.7											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	73.6%											
ICU Level of Service	D											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

PM BASE
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	168	43	35	161	17	23	127	20	25	164	7
Traffic Volume (vph)	4	168	43	35	161	17	23	127	20	25	164	7
Future Volume (vph)	4	168	43	35	161	17	23	127	20	25	164	7
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.974											
Fr Protected	0.999											
Satd. Flow (prot)	0	1703	0	0	1699	0	0	1712	0	0	1718	0
Fr Permitted	0.999											
Satd. Flow (perm)	0	1703	0	0	1699	0	0	1712	0	0	1718	0
Link Speed (k/h)	80											
Link Distance (m)	133.8											
Travel Time (s)	6.0											
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Heavy Vehicles (%)	0%	0%	0%	0%	1%	0%	0%	0%	0%	0%	0%	14%
Adj. Flow (vph)	4	200	48	44	192	28	24	165	28	32	228	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	252	0	0	264	0	0	217	0	0	272	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	0.0											
Link Offset(m)	0.0											
Crosswalk Width(m)	4.8											
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25											
Turning Speed (k/h)	Stop	15	15	25	Stop	15	25	Stop	15	25	Stop	15
Sign Control	Stop											
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	50.0%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

PM BASE
01-25-2024

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	Lane Configurations											
Sign Control	Stop											
Traffic Volume (vph)	4	168	43	35	161	17	23	127	20	25	164	7
Future Volume (vph)	4	168	43	35	161	17	23	127	20	25	164	7
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Hourly flow rate (vph)	4	200	48	44	192	28	24	165	28	32	228	12
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	252	264	217	272								
Volume Left (vph)	4	44	24	32								
Volume Right (vph)	48	28	28	12								
Head (s)	-0.11	-0.02	-0.06	0.01								
Departure Headway (s)	5.8	5.8	5.9	5.9								
Degree Utilization, x	0.40	0.43	0.36	0.44								
Capacity (veh/h)	564	562	541	560								
Control Delay (s)	12.6	13.1	12.2	13.4								
Approach Delay (s)	12.6	13.1	12.2	13.4								
Approach LOS	B	B	B	B								
Intersection Summary												
Delay	12.9											
Level of Service	B											
Intersection Capacity Utilization	50.0%											
Analysis Period (min)	15											
ICU Level of Service	A											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM BASE
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	16	444	40	48	387	86	19	98	40	67	115	21
Future Volume (vph)	16	444	40	48	387	86	19	98	40	67	115	21
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0	0.0	30.0	0.0	0.0	0.0	15.0	0.0	15.0	0.0	0.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fit Protected	0.950	0.985	0.950	0.950	0.966	0.950	0.950	0.951	0.950	0.950	0.973	0.950
Satd. Flow (prot)	1662	3182	0	1662	3164	0	1662	1637	0	1662	1687	0
Fit Permitted	0.393	0.446	0.446	0.446	0.446	0.446	0.446	0.446	0.446	0.446	0.446	0.446
Satd. Flow (perm)	687	3182	0	780	3164	0	1130	1637	0	1134	1687	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	25	50	80	38	60	50	60	60	60	60	60	60
Link Speed (km/h)	232.7	236.3	236.3	236.3	236.3	236.3	236.3	236.3	236.3	236.3	236.3	236.3
Link Distance (m)	16.8	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0	17.0
Travel Time (s)	1	1	1	1	1	1	1	1	1	1	1	1
Confl. Peds. (#/hr)	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Peak Hour Factor	0%	0%	0%	0%	1%	1%	0%	1%	3%	0%	0%	5%
Heavy Vehicles (%)	24	453	52	60	430	128	24	117	56	76	144	32
Adj. Flow (vph)	24	505	0	60	558	0	24	173	0	76	176	0
Shared Lane Traffic (%)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM BASE
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4	4	4	8	8	8	2	2	2	6	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase	10.0	10.0	5.0	5.0	5.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
Minimum Initial (s)	27.0	27.0	27.0	27.0	27.0	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Minimum Split (s)	37.0	37.0	37.0	37.0	37.0	27.8	27.8	27.8	27.8	27.8	27.8	27.8
Total Split (s)	57.1%	57.1%	57.1%	57.1%	57.1%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%
Total Split (%)	30.0	30.0	30.0	30.0	30.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Maximum Green (s)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Yellow Time (s)	2.5	2.5	2.5	2.5	2.5	3.3	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8	7.8
Total Lost Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lead/Lag	None	None	None	None	None	None	None	None	None	None	None	None
Lead-Lag Optimize?	12.0	12.0	12.0	12.0	12.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0
Vehicle Extension (s)	0	0	0	0	0	0	0	0	0	0	0	0
Recall Mode	13.9	13.9	13.9	13.9	13.9	29.1	29.1	29.1	29.1	29.1	29.1	29.1
Walk Time (s)	0.24	0.24	0.24	0.24	0.24	0.50	0.50	0.50	0.50	0.50	0.50	0.50
Flash Dont Walk (s)	0.15	0.65	0.32	0.68	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
Pedestrian Calls (#/hr)	18.9	22.7	22.8	21.4	8.9	7.7	9.6	8.7	9.6	8.7	9.6	8.7
Act Effct Green (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Adjusted g/C Ratio	18.9	22.7	22.8	21.4	8.9	7.7	9.6	8.7	9.6	8.7	9.6	8.7
v/c Ratio	0.07	0.30	0.15	0.33	0.04	0.21	0.13	0.21	0.13	0.21	0.13	0.21
Control Delay	2.1	25.0	5.5	25.0	1.2	7.3	4.0	8.6	4.0	8.6	4.0	8.6
Queue Delay	5.2	38.4	12.5	39.3	4.5	18.1	11.9	18.9	11.9	18.9	11.9	18.9
Total Delay	208.7	208.7	212.3	212.3	228.8	228.8	135.5	135.5	135.5	135.5	135.5	135.5
LOS	B	C	C	C	A	A	A	A	A	A	A	A
Approach Delay	22.5	21.5	21.5	21.5	7.9	7.9	9.0	9.0	9.0	9.0	9.0	9.0
Approach LOS	C	C	C	C	A	A	A	A	A	A	A	A
Queue Length 50th (m)	2.1	25.0	5.5	25.0	1.2	7.3	4.0	8.6	4.0	8.6	4.0	8.6
Queue Length 95th (m)	5.2	38.4	12.5	39.3	4.5	18.1	11.9	18.9	11.9	18.9	11.9	18.9
Internal Link Dist (m)	35.0	358	1688	1685	568	842	570	858	570	858	570	858
Turn Bay Length (m)	0	0	0	0	0	0	0	0	0	0	0	0
Base Capacity (vph)	0	0	0	0	0	0	0	0	0	0	0	0
Sanction Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.07	0.30	0.15	0.33	0.04	0.21	0.13	0.21	0.13	0.21	0.13	0.21
Intersection Summary	Other											
Area Type:	Cycle Length: 64.8											
Actual Cycle Length:	57.8											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.68											
Intersection Signal Delay:	18.2											
Intersection Capacity Utilization	62.6%											
Intersection LOS:	B											
ICU Level of Service B												

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	16	444	40	48	387	86	19	98	40	67	115	21
Future Volume (vph)	16	444	40	48	387	86	19	98	40	67	115	21
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frft	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1661	3181	1661	3163	1661	3163	1662	1638	1662	1687	1662	1687
Flt Permitted	0.39	1.00	0.45	1.00	0.45	1.00	0.65	1.00	0.65	1.00	0.65	1.00
Satd. Flow (perm)	688	3181	780	3163	780	3163	1131	1638	1134	1687	1134	1687
Peak-Hour factor, PHF	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Adj. Flow (vph)	24	453	52	60	430	128	24	117	56	76	144	32
RTOR Reduction (vph)	0	19	0	0	61	0	0	19	0	0	0	9
Lane Group Flow (vph)	24	486	0	60	497	0	24	154	0	76	167	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	0%	3%	0%	0%	1%	1%	0%	1%	3%	0%	0%	5%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4	4	4	8	8	8	2	2	2	2	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	2	6	6
Actuated Green, G (s)	13.9	13.9	13.9	13.9	13.9	13.9	29.1	29.1	29.1	29.1	29.1	29.1
Effective Green, g (s)	13.9	13.9	13.9	13.9	13.9	13.9	29.1	29.1	29.1	29.1	29.1	29.1
Actuated g/C Ratio	0.24	0.24	0.24	0.24	0.24	0.24	0.50	0.50	0.50	0.50	0.50	0.50
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	165	764	187	760	760	569	824	824	570	849	570	849
v/s Ratio Prot	0.15	0.15	0.08	0.16	0.16	0.09	0.09	0.09	0.07	0.07	0.10	0.10
v/c Ratio	0.03	0.15	0.64	0.32	0.65	0.04	0.19	0.13	0.20	0.20	0.20	0.20
Uniform Delay, d1	17.3	19.7	18.1	19.8	19.8	7.3	7.9	7.9	7.6	7.9	7.6	7.9
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	1.5	0.7	1.8	1.8	0.1	0.5	0.5	0.5	0.5	0.5	0.5
Delay (s)	17.6	21.2	18.8	21.6	21.6	7.4	8.4	8.4	8.1	8.4	8.1	8.4
Level of Service	B	C	B	C	C	A	A	A	A	A	A	A
Approach Delay (s)	21.0	21.0	21.3	21.3	21.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3
Approach LOS	C	C	C	C	C	A	A	A	A	A	A	A
Intersection Summary												
HCM 2000 Control Delay	17.6											
HCM 2000 Volume to Capacity ratio	0.34											
Actuated Cycle Length (s)	57.8											
Intersection Capacity Utilization	62.6%											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM BASE
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	4	4	4	4	4	4	4	4	4	4	4
Traffic Volume (vph)	94	417	71	305	436	74	89	246	249	90	322	55
Future Volume (vph)	94	417	71	305	436	74	89	246	249	90	322	55
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Per Bike Factor	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.99	0.99	0.99	0.99
Fit	0.977	0.977	0.976	0.976	0.976	0.976	0.922	0.922	0.922	0.922	0.973	0.973
Fit Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1662	3139	0	1662	3173	0	1662	2955	0	1630	3149	0
Fit Permitted	0.420	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.977
Satd. Flow (perm)	729	3139	0	729	3173	0	729	2955	0	636	3149	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	17	19	31	19	31	15	23	17	17	17	21	23
Link Speed (km/h)	50	50	50	50	50	50	50	50	50	50	50	50
Link Distance (m)	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9
Travel Time (s)	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8
Conf. Peds. (#/hr)	15	31	31	15	23	15	23	17	17	17	21	23
Peak Hour Factor	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.69
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	0%	2%	2%	2%	2%	2%
Adj. Flow (vph)	132	463	85	367	513	100	139	256	280	105	358	80
Shared Lane Traffic (%)	132	548	0	367	613	0	139	536	0	105	438	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Left	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Left	Right
Median Width (m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width (m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	15	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size (m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position (m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size (m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

PM BASE (220571) 8885 Lundy's Lane 5:00 pm 11-21-2022 PM - Existing
Paradigm Transportation Solutions Limited

Synchro 11 Report
Page 7

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln


PM BASE
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	36.1	22.3	48.9	32.1	45.3	31.4	43.4	31.4	43.4	31.4	43.4	31.4
Actuated g/C Ratio	0.35	0.22	0.48	0.31	0.44	0.31	0.44	0.31	0.44	0.31	0.44	0.31
v/c Ratio	0.38	0.79	0.83	0.61	0.83	0.61	0.34	0.51	0.29	0.46	0.29	0.46
Control Delay	19.3	46.0	35.9	31.6	20.8	20.5	20.7	31.8	20.7	31.8	20.7	31.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	19.3	46.0	35.9	31.6	20.8	20.5	20.7	31.8	20.7	31.8	20.7	31.8
LOS	B	D	D	C	C	C	C	C	C	C	C	C
Approach Delay	40.8	33.2	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
Approach LOS	D	C	C	C	C	C	C	C	C	C	C	C
Queue Length 50th (m)	15.2	56.0	49.7	55.3	16.7	28.3	12.4	37.8	12.4	37.8	12.4	37.8
Queue Length 95th (m)	20.3	80.7	69.5	72.0	24.1	54.4	26.4	63.1	26.4	63.1	26.4	63.1
Internal Link Dist (m)	264.9	264.9	267.8	267.8	267.8	267.8	258.2	258.2	258.2	258.2	258.2	258.2
Turn Bay Length (m)	25.0	109.9	510	1173	444	1054	403	950	403	950	403	950
Base Capacity (vph)	573	1099	510	1173	444	1054	403	950	403	950	403	950
Sanction Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.23	0.50	0.72	0.52	0.31	0.51	0.26	0.46	0.26	0.46	0.26	0.46
Intersection Summary	Other											
Area Type:	Cycle Length: 122											
Actual Cycle Length:	102.4											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.83											
Intersection Signal Delay:	31.4											
Intersection LOS:	C											
Intersection Capacity Utilization:	88.7%											
ICU Level of Service:	E											

PM BASE (220571) 8885 Lundy's Lane 5:00 pm 11-21-2022 PM - Existing
Paradigm Transportation Solutions Limited

Synchro 11 Report
Page 8

Analysis Period (min) 15



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	94	417	71	305	436	74	89	246	249	90	322	55
Future Volume (vph)	94	417	71	305	436	74	89	246	249	90	322	55
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.98	1.00	0.98	1.00	0.92	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1657	3141	1658	3173	1655	2959	1626	3150	1626	3150	1626	3150
Flt Permitted	0.42	1.00	0.25	1.00	0.43	1.00	0.37	1.00	0.43	1.00	0.37	1.00
Satd. Flow (perm)	732	3141	434	3173	745	2959	641	3150	745	2959	641	3150
Peak-Hour factor, PHF	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.89
Adj. Flow (vph)	132	463	85	367	513	100	139	256	280	105	358	80
RTOR Reduction (vph)	0	13	0	0	13	0	0	149	0	0	15	0
Lane Group Flow (vph)	132	535	0	367	600	0	139	387	0	105	423	0
Confl. Peds. (#/hr)	15	31	31	15	23	17	17	23	17	17	23	23
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	0%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	5	2	1	6	1	6	1	6
Permitted Phases	4	8	8	8	2	2	2	2	2	2	2	2
Actuated Green, G (s)	32.1	22.3	44.9	32.1	41.2	31.4	39.4	30.5	39.4	30.5	39.4	30.5
Effective Green, g (s)	32.1	22.3	44.9	32.1	41.2	31.4	39.4	30.5	39.4	30.5	39.4	30.5
Actuated g/C Ratio	0.31	0.22	0.44	0.31	0.40	0.31	0.39	0.30	0.39	0.30	0.39	0.30
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	318	685	425	996	387	909	332	940	332	940	332	940
v/s Ratio Prot	0.04	0.17	c0.17	0.19	c0.03	0.13	0.03	c0.13	0.03	c0.13	0.03	c0.13
v/s Ratio Perm	0.09	0.42	c0.21	0.11	0.11	0.09	0.09	0.09	0.09	0.09	0.09	0.09
v/c Ratio	0.42	0.78	0.86	0.60	0.36	0.43	0.32	0.45	0.32	0.45	0.32	0.45
Uniform Delay, d1	26.1	37.6	21.8	29.7	20.0	28.2	20.8	29.1	20.8	29.1	20.8	29.1
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.7	5.6	16.3	0.9	0.4	1.5	0.4	1.6	0.4	1.6	0.4	1.6
Delay (s)	26.8	43.2	38.1	30.6	20.4	29.7	21.2	30.6	21.2	30.6	21.2	30.6
Level of Service	C	D	D	C	C	C	C	C	C	C	C	C
Approach Delay (s)	40.1	33.4	27.8	28.8	27.8	28.8	28.8	28.8	28.8	28.8	28.8	28.8
Approach LOS	D	C	C	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	32.8											
HCM 2000 Level of Service	C											
HCM 2000 Volume to Capacity ratio	0.68											
Actuated Cycle Length (s)	102.2											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	88.7%											
ICU Level of Service	E											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

AM BG 2025
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	105	11	16	109	30	38	180	37	23	74	4
Traffic Volume (vph)	4	105	11	16	109	30	38	180	37	23	74	4
Future Volume (vph)	4	105	11	16	109	30	38	180	37	23	74	4
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.981			0.970			0.977				0.991	
Fr Protected	0.996			0.995			0.991				0.989	
Satd. Flow (prot)	0	1629	0	0	1652	0	0	1642	0	0	1634	0
Fr Permitted	0.996			0.995			0.991				0.989	
Satd. Flow (perm)	0	1629	0	0	1652	0	0	1642	0	0	1634	0
Link Speed (k/h)	80			80			60				60	
Link Distance (m)	133.8			190.3			256.3				275.8	
Travel Time (s)	6.0			8.6			15.4				16.5	
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Heavy Vehicles (%)	25%	2%	10%	0%	1%	7%	0%	2%	11%	0%	7%	0%
Adj. Flow (vph)	12	119	22	17	118	38	55	207	55	29	89	8
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	153	0	0	173	0	0	317	0	0	126	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	0.0			0.0			0.0			0.0		0.0
Link Offset(m)	0.0			0.0			0.0			0.0		0.0
Crosswalk Width(m)	4.8			4.8			4.8			4.8		4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25			15			15			25		15
Turning Speed (k/h)	Stop			Stop			Stop			Stop		Stop
Sign Control												
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	40.4%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

AM BG 2025
01-25-2024

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	105	11	16	109	30	38	180	37	23	74	4
Sign Control	Stop			Stop			Stop			Stop		Stop
Traffic Volume (vph)	4	105	11	16	109	30	38	180	37	23	74	4
Future Volume (vph)	4	105	11	16	109	30	38	180	37	23	74	4
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Hourly flow rate (vph)	12	119	22	17	118	38	55	207	55	29	89	8
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	153	173	317	126								
Volume Left (vph)	12	17	55	29								
Volume Right (vph)	22	38	55	8								
Head (s)	0.01	-0.07	-0.01	0.09								
Departure Headway (s)	5.4	5.2	5.0	5.4								
Degree Utilization, x	0.23	0.25	0.44	0.19								
Capacity (veh/h)	610	626	689	613								
Control Delay (s)	9.9	10.0	11.8	9.6								
Approach Delay (s)	9.9	10.0	11.8	9.6								
Approach LOS	A	B	B	A								
Intersection Summary												
Delay	10.7											
Level of Service	B											
Intersection Capacity Utilization	40.4%											
ICU Level of Service	A											
Analysis Period (min)	15											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM BG 2025

01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	17	347	20	19	285	50	24	114	42	64	49	23
Traffic Volume (vph)	17	347	20	19	285	50	24	114	42	64	49	23
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	35.0	0.0	30.0	0.0	15.0	0.0	15.0	0.0	15.0	0.0	15.0	0.0
Storage Length (m)	1	1	0	1	0	1	0	1	0	1	0	1
Storage Lanes	7.5	7.5	0	7.5	0	7.5	0	7.5	0	7.5	0	7.5
Taper Length (m)	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Lane Util. Factor	1.00	0.990	0.990	1.00	0.975	0.975	1.00	0.951	0.950	0.950	0.947	0.947
Flt Protected	1471	3197	0	1662	3054	0	1662	1611	0	1564	1636	0
Satd Flow (prot)	0.528	0.519	0	0.637	0.637	0	0.637	0.644	0	0.644	0.644	0
Flt Permitted	818	3197	0	907	3054	0	1220	1611	0	1053	1636	0
Satd Flow (perm)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Right Turn on Red	14	50	49	50	236.3	17.0	60	252.8	159.5	9.6	33	60
Satd Flow (RTOR)	Link Speed (km/h)	232.7	236.3	236.3	236.3	17.0	60	252.8	159.5	9.6	33	60
Link Distance (m)	16.8	16.8	17.0	17.0	17.0	17.0	15.2	15.2	15.2	15.2	15.2	15.2
Travel Time (s)	1	1	1	1	1	1	1	1	1	1	1	1
Confl. Peds. (#/hr)	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Peak Hour Factor	13%	3%	0%	7%	2%	0%	8%	7%	2%	0%	3%	0%
Heavy Vehicles (%)	25	369	25	46	313	64	33	120	59	77	60	33
Adj. Flow (vph)	25	394	0	46	377	0	33	179	0	77	93	0
Shared Lane Traffic (%)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Median Width(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Link Offset(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Crosswalk Width(m)	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Two way Left Turn Lane	25	15	25	15	25	15	25	15	25	15	25	15
Headway Factor	1	2	1	2	1	2	1	2	1	2	1	2
Turning Speed (k/h)	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Number of Detectors	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Detector Template	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Size(m)	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Type	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln


AM BG 2025

01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases	4	4	4	8	8	8	2	2	2	6	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase	10.0	10.0	5.0	5.0	5.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
Switch Phase	27.0	27.0	27.0	27.0	27.0	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Minimum Initial (s)	37.0	37.0	37.0	37.0	37.0	27.8	27.8	27.8	27.8	27.8	27.8	27.8
Minimum Split (s)	57.1%	57.1%	57.1%	57.1%	57.1%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%
Total Split (s)	30.0	30.0	30.0	30.0	30.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Maximum Green (s)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Yellow Time (s)	2.5	2.5	2.5	2.5	2.5	3.3	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8	7.8
Total Lost Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lead/Lag	None	None	None	None	None	None	None	None	None	None	None	None
Lead-Lag Optimize?	12.0	12.0	12.0	12.0	12.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0
Vehicle Extension (s)	11.7	11.7	11.7	11.7	11.7	29.0	29.0	29.0	29.0	29.0	29.0	29.0
Recall Mode	0.21	0.21	0.21	0.21	0.21	0.52	0.52	0.52	0.52	0.52	0.52	0.52
Walk Time (s)	0.15	0.58	0.24	0.55	0.05	0.05	0.21	0.14	0.11	0.14	0.11	0.11
Flash Dont Walk (s)	19.7	22.5	21.5	20.2	7.5	6.6	8.3	5.6	8.3	5.6	8.3	5.6
Pedestrian Calls (#/hr)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Act Effct Green (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Actuated g/C Ratio	19.7	22.5	21.5	20.2	7.5	6.6	8.3	5.6	8.3	5.6	8.3	5.6
v/c Ratio	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay	19.7	22.5	21.5	20.2	7.5	6.6	8.3	5.6	8.3	5.6	8.3	5.6
Queue Delay	19.7	22.5	21.5	20.2	7.5	6.6	8.3	5.6	8.3	5.6	8.3	5.6
Total Delay	22.3	20.3	20.3	20.3	20.3	6.8	6.8	6.8	6.8	6.8	6.8	6.8
LOS	C	C	C	C	C	A	A	A	A	A	A	A
Approach Delay	2.2	19.1	4.1	16.2	4.9	27.5	4.4	17.7	9.9	8.4	135.5	135.5
Approach LOS	5.4	30.7	4.9	27.5	4.4	17.7	4.4	17.7	9.9	8.4	135.5	135.5
Queue Length 50th (m)	208.7	208.7	212.3	212.3	212.3	15.0	15.0	15.0	15.0	15.0	15.0	15.0
Queue Length 95th (m)	35.0	442	489	1672	637	860	550	870	550	870	550	870
Internal Link Dist (m)	0	0	0	0	0	0	0	0	0	0	0	0
Turn Bay Length (m)	0	0	0	0	0	0	0	0	0	0	0	0
Base Capacity (vph)	0	0	0	0	0	0	0	0	0	0	0	0
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0.06	0.23	0.09	0.23	0.05	0.21	0.14	0.11	0.14	0.11	0.11	0.11
Reduced v/c Ratio	Intersection Summary	Area Type:	Other	Area Type:	Other	Area Type:	Other	Area Type:	Other	Area Type:	Other	Area Type:
Intersection Summary	Area Type:	Other	Area Type:	Other	Area Type:	Other	Area Type:	Other	Area Type:	Other	Area Type:	Area Type:
Area Type:	Other	Other	Other	Other	Other	Other	Other	Other	Other	Other	Other	Other
Cycle Length: 64.8	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6	Actual Cycle Length: 55.6
Natural Cycle: 65	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated	Control Type: Actuated-Uncoordinated
Maximum v/c Ratio: 0.58	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8	Intersection Signal Delay: 16.8
Intersection Capacity Utilization 51.9%	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B	Intersection LOS: B
ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A	ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 102: Garner Rd & Lundy's Ln



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	17	347	20	19	285	50	24	114	42	64	49	23
Traffic Volume (vph)	17	347	20	19	285	50	24	114	42	64	49	23
Future Volume (vph)	17	347	20	19	285	50	24	114	42	64	49	23
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.99	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.95
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1471	3199	1661	3053	1661	3053	1662	1610	1554	1636	1554	1636
Flt Permitted	0.53	1.00	0.52	1.00	0.52	1.00	0.70	1.00	0.64	1.00	0.64	1.00
Satd. Flow (perm)	818	3199	908	3053	908	3053	1219	1610	1054	1636	1054	1636
Peak-Hour factor, PHF	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Adj. Flow (vph)	25	369	25	46	313	64	33	120	59	77	60	33
RTOR Reduction (vph)	0	11	0	0	39	0	0	19	0	0	0	16
Lane Group Flow (vph)	25	383	0	46	338	0	33	160	0	77	77	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4			8				2				6
Permitted Phases	11.7	11.7	11.7	11.7	11.7	11.7	29.0	29.0	29.0	29.0	29.0	29.0
Actuated Green, G (s)	11.7	11.7	11.7	11.7	11.7	11.7	29.0	29.0	29.0	29.0	29.0	29.0
Effective Green, g (s)	0.21	0.21	0.21	0.21	0.21	0.21	0.52	0.52	0.52	0.52	0.52	0.52
Actuated g/C Ratio	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Clearance Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Vehicle Extension (s)	172	674	191	643	191	643	636	841	550	854	550	854
Lane Grp Cap (vph)	c0.12			0.11			c0.10			0.05		0.05
v/s Ratio Prot	0.03			0.05			0.03			0.07		0.07
v/c Ratio	0.15	0.57	0.24	0.53	0.05	0.19	0.05	0.19	0.14	0.09	0.14	0.09
Uniform Delay, d1	17.8	19.6	18.2	19.4	6.5	7.0	6.5	7.0	6.8	6.6	6.8	6.6
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	0.9	0.5	0.6	0.2	0.5	0.2	0.5	0.5	0.2	0.5	0.2
Delay (s)	18.1	20.5	18.7	20.0	6.7	7.5	6.7	7.5	7.4	6.8	7.4	6.8
Level of Service	B	C	B	C	A	A	A	A	A	A	A	A
Approach Delay (s)	20.4			19.9			7.4			7.1		7.1
Approach LOS	C			B			A			A		A
Intersection Summary												
HCM 2000 Control Delay	16.1	HCM 2000 Level of Service B										
HCM 2000 Volume to Capacity ratio	0.30											
Actuated Cycle Length (s)	55.5	Sum of lost time (s) 14.8										
Intersection Capacity Utilization	51.9%	ICU Level of Service A										
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM BG 2025
01-25-2024


	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	50	359	58	156	247	47	81	225	324	85	243	46
Traffic Volume (vph)	50	359	58	156	247	47	81	225	324	85	243	46
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Length (m)	1	0	1	0	1	0	1	0	1	0	1	0
Storage Lanes	7.5	0	7.5	0	7.5	0	7.5	0	7.5	0	7.5	0
Taper Length (m)	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Lane Util. Factor	0.99	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.99	1.00	0.99	1.00
Ped Bike Factor	0.978	0.978	0.969	0.969	0.969	0.969	0.969	0.969	0.969	0.974	0.974	0.974
Flt Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1539	3068	0	1525	2980	0	1614	2917	0	1568	3144	0
Flt Permitted	0.529	0.320	0.320	0.544	0.544	0.544	0.544	0.544	0.544	0.277	0.277	0.277
Satd. Flow (perm)	848	3068	0	510	2980	0	916	2917	0	457	3144	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	16	27	30.3	50	50	282.2	282.2	282.2	282.2	282.2	282.2	282.2
Link Speed (km/h)	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8
Link Distance (m)	12	12	12	12	12	12	12	12	12	12	12	12
Travel Time (s)	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Conf. Peds. (#/hr)	8%	5%	9%	7%	9%	3%	3%	4%	6%	2%	5%	5%
Peak Hour Factor	56	339	67	195	298	77	89	265	410	110	286	60
Adj. Flow (vph)	56	339	67	195	298	77	89	265	410	110	286	60
Shared Lane Traffic (%)	56	466	0	195	375	0	89	675	0	110	346	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM BG 2025
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Total Split (%)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Maximum Green (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
Yellow Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Total Lost Time (s)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	29.6	18.3	38.0	25.7	42.5	30.4	44.3	33.0	44.3	33.0	44.3	33.0
Actuated g/C Ratio	0.33	0.20	0.42	0.28	0.47	0.34	0.49	0.37	0.49	0.37	0.49	0.37
v/c Ratio	0.17	0.74	0.55	0.43	0.18	0.57	0.33	0.30	0.33	0.30	0.33	0.30
Control Delay	17.1	40.6	23.2	26.7	14.5	16.4	16.4	22.8	16.4	22.8	16.4	22.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	17.1	40.6	23.2	26.7	14.5	16.4	16.4	22.8	16.4	22.8	16.4	22.8
LOS	B	D	C	C	B	B	B	C	B	C	B	C
Approach Delay	38.0	25.5	25.5	25.5	16.2	16.2	16.2	21.2	16.2	21.2	16.2	21.2
Approach LOS	D	C	C	C	B	B	B	C	B	C	B	C
Queue Length 50th (m)	5.9	40.3	22.7	27.6	7.9	27.4	10.0	22.5	10.0	22.5	10.0	22.5
Queue Length 95th (m)	13.5	63.7	34.6	39.5	20.2	50.7	20.2	39.7	20.2	39.7	20.2	39.7
Internal Link Dist (m)	264.9	264.9	267.8	267.8	258.2	258.2	258.2	204.1	258.2	204.1	258.2	204.1
Turn Bay Length (m)	25.0	121.3	499	1186	554	1182	381	1163	381	1163	381	1163
Base Capacity (vph)	551	1213	499	1186	554	1182	381	1163	381	1163	381	1163
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.10	0.38	0.39	0.32	0.16	0.57	0.29	0.30	0.29	0.30	0.29	0.30
Intersection Summary	Intersection LOS: C											
Area Type:	Other											
Cycle Length:	122											
Actuated Cycle Length:	90.2											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.74											
Intersection Signal Delay:	24.4											
Intersection Capacity Utilization	74.6%											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
103: Kalar Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	50	359	58	156	247	47	81	225	324	85	243	46
Future Volume (vph)	50	359	58	156	247	47	81	225	324	85	243	46
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.91	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1532	3071	1523	2984	1608	2917	1568	3146				
Flt Permitted	0.53	1.00	0.32	1.00	0.54	1.00	0.28	1.00				
Satd. Flow (perm)	853	3071	513	2984	921	2917	458	3146				
Peak-Hour factor, PHF	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Adj. Flow (vph)	56	399	67	195	298	77	89	265	410	110	286	60
RTOR Reduction (vph)	0	13	0	0	19	0	0	200	0	0	12	0
Lane Grp. Flow (vph)	56	453	0	195	356	0	89	475	0	110	334	0
Confl. Peds. (#/hr)	12	12	12	12	12	12	13	13				13
Heavy Vehicles (%)	8%	5%	9%	7%	9%	3%	3%	4%	6%	2%	5%	
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	24.8	18.9		34.6	25.7		37.7	31.0		41.7	33.0	
Effective Green, g (s)	24.8	18.9		34.6	25.7		37.7	31.0		41.7	33.0	
Actuated g/C Ratio	0.27	0.21		0.38	0.28		0.41	0.34		0.46	0.36	
Clearance Time (s)	3.0	7.0		3.0	7.0		3.0	7.0		3.0	7.0	
Vehicle Extension (s)	2.6	2.6		2.6	2.6		2.6	2.6		2.6	2.6	
Lane Grp Cap (vph)	275	635		334	839		430	900		314	1137	
v/s Ratio Prot	0.01	c0.15		c0.08	0.12		0.02	c0.16		c0.03	0.11	
v/s Ratio Perm	0.04			0.14			0.07			0.13		
v/c Ratio	0.20	0.71		0.58	0.42		0.21	0.48		0.35	0.29	
Uniform Delay, d1	25.1	33.7		20.6	26.8		16.7	23.8		15.1	20.8	
Progression Factor	1.00	1.00		1.00	1.00		1.00	1.00		1.00	1.00	
Incremental Delay, d2	0.3	3.6		2.2	0.3		0.2	1.7		0.5	0.7	
Delay (s)	25.4	37.3		22.8	27.0		16.8	25.5		15.7	21.5	
Level of Service	C	D		C	C		B	C		B	C	
Approach Delay (s)		36.0			25.6			24.4			20.1	
Approach LOS		D			C			C			C	
Intersection Summary												
HCM 2000 Control Delay												
HCM 2000 Volume to Capacity ratio												
Actuated Cycle Length (s)												
Intersection Capacity Utilization												
Analysis Period (min)												
c Critical Lane Group												

Lanes, Volumes, Timings 101: Garner Rd & Beaverdams Rd

PM BG 2025
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group												
Lane Configurations	4	178	46	37	171	18	24	135	21	27	174	7
Traffic Volume (vph)	4	178	46	37	171	18	24	135	21	27	174	7
Future Volume (vph)	4	178	46	37	171	18	24	135	21	27	174	7
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.974				0.986			0.982			0.994	
Fr Protected	0.999				0.992			0.995			0.994	
Satd. Flow (prot)	0	1703	0	0	1699	0	0	1710	0	0	1719	0
Fr Permitted	0.999				0.992			0.995			0.994	
Satd. Flow (perm)	0	1703	0	0	1699	0	0	1710	0	0	1719	0
Link Speed (k/h)	80				80			60			60	
Link Distance (m)	133.8				190.3			256.3			275.8	
Travel Time (s)	6.0				8.6			15.4			16.5	
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Heavy Vehicles (%)	0%	0%	0%	0%	1%	0%	0%	0%	0%	0%	0%	14%
Adj. Flow (vph)	4	212	51	46	204	30	25	175	30	35	242	12
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	267	0	0	280	0	0	230	0	0	289	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Right	Right
Median Width(m)	0.0				0.0			0.0			0.0	
Link Offset(m)	0.0				0.0			0.0			0.0	
Crosswalk Width(m)	4.8				4.8			4.8			4.8	
Two way Left Turn Lane												
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	25		15		25		15	25		15	25	
Sign Control	Stop		Stop		Stop		Stop	Stop		Stop	Stop	
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	52.6%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis 101: Garner Rd & Beaverdams Rd

PM BG 2025
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement												
Lane Configurations	4	178	46	37	171	18	24	135	21	27	174	7
Sign Control	Stop				Stop			Stop			Stop	
Traffic Volume (vph)	4	178	46	37	171	18	24	135	21	27	174	7
Future Volume (vph)	4	178	46	37	171	18	24	135	21	27	174	7
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Hourly flow rate (vph)	4	212	51	46	204	30	25	175	30	35	242	12
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	267	280	230	289								
Volume Left (vph)	4	46	25	35								
Volume Right (vph)	51	30	30	12								
Head (s)	-0.11	-0.02	-0.06	0.01								
Departure Headway (s)	6.0	6.1	6.2	6.1								
Degree Utilization, x	0.45	0.47	0.39	0.49								
Capacity (veh/h)	543	534	521	532								
Control Delay (s)	13.8	14.4	13.1	14.8								
Approach Delay (s)	13.8	14.4	13.1	14.8								
Approach LOS	B	B	B	B								
Intersection Summary												
Delay	14.1											
Level of Service	B											
Intersection Capacity Utilization	52.6%											
ICU Level of Service	A											
Analysis Period (min)	15											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM BG 2025

01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	17	471	42	51	411	91	20	104	42	71	122	22
Future Volume (vph)	17	471	42	51	411	91	20	104	42	71	122	22
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1	1	0	1	1	0	1	1	0	1	1	0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00	1.00		1.00	1.00		1.00		1.00		1.00	
Flt Protected	0.950			0.950		0.966		0.952		0.950		0.973
Satd Flow (prot)	1662	3182	0	1662	3164	0	1662	1639	0	1662	1688	0
Flt Permitted	0.364		0.417			0.640				0.642		
Satd Flow (perm)	637	3182	0	729	3164	0	1120	1639	0	1124	1688	0
Right Turn on Red		Yes			Yes		Yes		Yes		Yes	
Satd Flow (RTOR)	25		80		50		38		60		17	
Link Speed (km/h)	50		50		50		50		50		50	
Link Distance (m)	232.7		236.3		236.3		252.8		252.8		159.5	
Travel Time (s)	16.8		17.0		17.0		15.2		15.2		9.6	
Confl. Peds. (#/hr)	1		1		1		1		1		1	
Peak Hour Factor	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Heavy Vehicles (%)	0%	3%	0%	0%	1%	1%	0%	3%	0%	0%	0%	5%
Adj. Flow (vph)	25	481	55	64	457	136	25	124	59	81	153	33
Shared Lane Traffic (%)	25	536	0	64	593	0	25	183	0	81	186	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6		3.6		3.6		3.6		3.6		3.6	
Link Offset(m)	0.0		0.0		0.0		0.0		0.0		0.0	
Crosswalk Width(m)	4.8		4.8		4.8		4.8		4.8		4.8	
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4		9.4		9.4		9.4		9.4		9.4	
Detector 2 Size(m)	0.6		0.6		0.6		0.6		0.6		0.6	
Detector 2 Type	Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	


Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM BG 2025

01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases	4	4	4	8	8	8	2	2	2	6	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase	4	4	4	8	8	8	2	2	2	6	6	6
Switch Phase	10.0	10.0		5.0	5.0		8.0	8.0		8.0	8.0	
Minimum Initial (s)	27.0	27.0		27.0	27.0		36.8	36.8		36.8	36.8	
Minimum Split (s)	37.0	37.0		37.0	37.0		27.8	27.8		27.8	27.8	
Total Split (s)	57.1%	57.1%		57.1%	57.1%		42.9%	42.9%		42.9%	42.9%	
Total Split (%)	30.0	30.0		30.0	30.0		20.0	20.0		20.0	20.0	
Maximum Green (s)	4.5	4.5		4.5	4.5		4.5	4.5		4.5	4.5	
Yellow Time (s)	2.5	2.5		2.5	2.5		3.3	3.3		3.3	3.3	
All-Red Time (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Lost Time Adjust (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	
Total Lost Time (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	
Lead/Lag												
Lead-Lag Optimize?	2.5	2.5		2.5	2.5		2.5	2.5		2.5	2.5	
Vehicle Extension (s)	None	None		None	None		Max	Max		Max	Max	
Recall Mode	8.0	8.0		8.0	8.0		11.0	11.0		11.0	11.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		18.0	18.0		18.0	18.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	14.7	14.7		14.7	14.7		29.1	29.1		29.1	29.1	
Actuated g/C Ratio	0.16	0.66		0.35	0.70		0.05	0.22		0.15	0.22	
v/c Ratio	19.0	22.7		23.5	21.6		9.4	8.3		10.2	9.4	
Control Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Queue Delay	19.0	22.7		23.5	21.6		9.4	8.3		10.2	9.4	
Total Delay	19.0	22.7		23.5	21.6		9.4	8.3		10.2	9.4	
LOS	B	C		C	C		A	A		B	A	
Approach Delay	22.5			21.8			8.4			9.6		
Approach LOS	C			C			A			A		
Queue Length 50th (m)	2.2	26.9		5.9	27.2		1.3	8.1		4.5	9.6	
Queue Length 95th (m)	5.4	40.9		13.3	42.1		4.7	19.8		13.1	20.7	
Internal Link Dist (m)	208.7			212.3			228.8			135.5		
Turn Bay Length (m)	35.0			30.0			15.0			15.0		
Base Capacity (vph)	327	1645		374	1663		555	832		557	846	
Sanctuary Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.08	0.33		0.17	0.36		0.05	0.22		0.15	0.22	
Intersection Summary												
Area Type:	Other											
Cycle Length:	64.8											
Actuated Cycle Length:	58.7											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.70											
Intersection Signal Delay:	18.5											
Intersection Capacity Utilization	63.9%											
Intersection LOS:	B											
ICU Level of Service	B											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	17	47	47	42	51	41	91	20	104	42	71	122
Traffic Volume (vph)	17	47	47	42	51	41	91	20	104	42	71	122
Future Volume (vph)	17	47	47	42	51	41	91	20	104	42	71	122
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Flt Protected	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.97
Satd. Flow (prot)	1661	3181	1661	3163	1661	3163	1662	1638	1662	1662	1688	1688
Flt Permitted	0.36	1.00	0.42	1.00	0.64	1.00	0.64	1.00	0.64	1.00	0.64	1.00
Satd. Flow (perm)	636	3181	729	3163	1121	1638	1121	1638	1124	1688	1124	1688
Peak-Hour factor, PHF	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Adj. Flow (vph)	25	481	55	64	457	136	25	124	59	81	152	33
RTOR Reduction (vph)	0	19	0	0	60	0	0	19	0	0	0	9
Lane Group Flow (vph)	25	517	0	64	533	0	25	164	0	81	177	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	0%	3%	0%	0%	1%	1%	0%	1%	3%	0%	0%	5%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4	4	4	8	8	8	2	2	2	6	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Actuated Green, G (s)	14.7	14.7	14.7	14.7	14.7	14.7	29.1	29.1	29.1	29.1	29.1	29.1
Effective Green, g (s)	14.7	14.7	14.7	14.7	14.7	14.7	29.1	29.1	29.1	29.1	29.1	29.1
Actuated g/C Ratio	0.25	0.25	0.25	0.25	0.25	0.25	0.50	0.50	0.50	0.50	0.50	0.50
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	159	797	182	793	556	813	556	813	558	838	558	838
v/s Ratio Prot	0.16	0.16	0.16	0.17	0.17	0.17	0.10	0.10	0.11	0.11	0.11	0.11
v/s Ratio Perm	0.04	0.16	0.09	0.35	0.67	0.04	0.02	0.02	0.15	0.21	0.15	0.21
Uniform Delay, d1	17.1	19.6	18.0	19.8	18.0	19.8	7.6	8.3	8.0	8.3	8.0	8.3
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	1.6	0.9	2.0	0.2	0.6	0.2	0.6	0.5	0.6	0.5	0.6
Delay (s)	17.5	21.3	18.9	21.8	18.9	21.8	7.7	8.8	8.5	8.9	8.5	8.9
Level of Service	B	C	B	C	B	C	A	A	A	A	A	A
Approach Delay (s)	21.1	21.1	21.5	21.5	21.5	21.5	8.7	8.7	8.8	8.8	8.8	8.8
Approach LOS	C	C	C	C	C	C	A	A	A	A	A	A
Intersection Summary												
HCM 2000 Control Delay	17.8											
HCM 2000 Level of Service	B											
HCM 2000 Volume to Capacity ratio	0.37											
Actuated Cycle Length (s)	58.6											
Sum of lost time (s)	14.8											
Intersection Capacity Utilization	63.9%											
ICU Level of Service	B											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM BG 2025
01-25-2024


	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	100	442	75	324	463	79	94	261	264	95	342	58
Traffic Volume (vph)	100	442	75	324	463	79	94	261	264	95	342	58
Future Volume (vph)	100	442	75	324	463	79	94	261	264	95	342	58
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	30.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Per Bike Factor	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.99	0.99	0.99	0.99
Fit	0.977	0.977	0.975	0.975	0.975	0.975	0.922	0.922	0.922	0.922	0.973	0.973
Fit Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1662	3140	0	1662	3169	0	1662	2955	0	1630	3149	0
Fit Permitted	0.404	0.229	0.229	0.398	0.398	0.398	0.398	0.398	0.398	0.398	0.398	0.398
Satd. Flow (perm)	702	3140	0	395	3169	0	688	2955	0	577	3149	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	17	19	31	19	31	15	23	17	17	17	21	23
Link Speed (km/h)	50	50	50	50	50	50	50	50	50	50	50	50
Link Distance (m)	288.9	291.8	291.8	282.2	282.2	282.2	282.2	282.2	282.2	282.2	282.2	282.2
Travel Time (s)	20.8	21.0	21.0	20.3	20.3	20.3	20.3	20.3	20.3	20.3	20.3	20.3
Confl. Peds. (#/hr)	15	31	31	15	23	15	23	17	17	17	21	23
Peak Hour Factor	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.69
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	141	491	89	390	545	107	147	272	297	110	380	84
Shared Lane Traffic (%)	141	580	0	390	652	0	147	569	0	110	464	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Left	Right
Median Width (m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width (m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	15	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size (m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position (m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size (m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM BG 2025
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	37.9	23.8	51.7	34.6	45.5	31.3	43.6	30.4	43.6	30.4	43.6	30.4
Actuated g/C Ratio	0.36	0.23	0.49	0.33	0.43	0.30	0.41	0.29	0.41	0.29	0.41	0.29
v/c Ratio	0.41	0.80	0.88	0.62	0.38	0.55	0.33	0.50	0.33	0.50	0.33	0.50
Control Delay	19.6	47.1	42.0	31.8	22.6	22.8	22.4	34.0	22.4	34.0	22.4	34.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	19.6	47.1	42.0	31.8	22.6	22.8	22.4	34.0	22.4	34.0	22.4	34.0
LOS	B	D	D	C	C	C	C	C	C	C	C	C
Approach Delay	41.7	35.6	22.7	35.6	22.7	35.6	22.7	35.6	22.7	35.6	22.7	35.6
Approach LOS	D	D	D	D	D	D	D	D	D	D	D	D
Queue Length 50th (m)	16.5	62.2	54.5	60.7	19.1	33.9	14.0	43.2	14.0	43.2	14.0	43.2
Queue Length 95th (m)	21.5	86.0	80.9	77.9	26.1	60.9	28.3	68.5	28.3	68.5	28.3	68.5
Internal Link Dist (m)	264.9	264.9	267.8	267.8	267.8	267.8	267.8	267.8	267.8	267.8	267.8	267.8
Turn Bay Length (m)	25.0	567	1067	498	1166	416	1029	373	922	373	922	373
Base Capacity (vph)	0	0	0	0	0	0	0	0	0	0	0	0
Sanction Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.54	0.78	0.56	0.35	0.55	0.29	0.50	0.29	0.50	0.29	0.50
Intersection Summary	Intersection LOS: C ICU Level of Service E											
Area Type:	Other											
Cycle Length:	122											
Actuated Cycle Length:	105.4											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.88											
Intersection Signal Delay:	33.3											
Intersection Capacity Utilization	90.4%											

Analysis Period (min) 15



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	100	442	75	324	463	79	94	261	264	95	342	58
Future Volume (vph)	100	442	75	324	463	79	94	261	264	95	342	58
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.98	1.00	0.99	1.00	0.99
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.98	1.00	0.98	1.00	0.92	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1657	3142	1659	3173	1655	2958	1655	2958	1626	3151	1626	3151
Flt Permitted	0.40	1.00	0.23	1.00	0.40	1.00	0.40	1.00	0.34	1.00	0.34	1.00
Satd. Flow (perm)	705	3142	400	3173	693	2958	693	2958	581	3151	581	3151
Peak-Hour factor, PHF	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.89
Adj. Flow (vph)	141	491	89	390	545	107	147	272	297	110	380	84
RTOR Reduction (vph)	0	13	0	0	13	0	0	151	0	0	15	0
Lane Group Flow (vph)	141	567	0	390	639	0	147	418	0	110	449	0
Confl. Peds. (#/hr)	15	31	31	17	23	17	17	17	17	17	17	23
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	0%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4	3	8	5	2	2	1	6	1	6	6
Permitted Phases	4	8	8	8	8	8	8	8	8	8	8	8
Actuated Green, G (s)	33.9	23.8	47.7	34.6	41.4	31.3	39.6	30.4	39.6	30.4	39.6	30.4
Effective Green, g (s)	33.9	23.8	47.7	34.6	41.4	31.3	39.6	30.4	39.6	30.4	39.6	30.4
Actuated g/C Ratio	0.32	0.23	0.45	0.33	0.39	0.30	0.38	0.29	0.38	0.29	0.38	0.29
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	318	710	431	1043	365	880	310	910	310	910	310	910
v/s Ratio Prot	0.04	0.18	c0.18	0.20	c0.04	0.14	0.03	c0.14	0.03	c0.14	0.03	c0.14
v/s Ratio Perm	0.10	c0.23	0.12	0.12	0.12	0.10	0.10	0.10	0.10	0.10	0.10	0.10
v/c Ratio	0.44	0.80	0.90	0.61	0.40	0.47	0.35	0.49	0.35	0.49	0.35	0.49
Uniform Delay, d1	26.4	38.4	22.1	29.7	21.4	30.2	22.2	31.0	22.2	31.0	22.2	31.0
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.8	6.1	22.0	1.0	0.6	1.8	0.5	1.9	0.5	1.9	0.5	1.9
Delay (s)	27.2	44.5	44.1	30.6	22.0	32.1	22.7	32.9	22.7	32.9	22.7	32.9
Level of Service	C	D	D	C	C	C	C	C	C	C	C	C
Approach Delay (s)	41.1	35.7	30.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0	31.0
Approach LOS	D	D	D	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	34.8											
HCM 2000 Level of Service	C											
HCM 2000 Volume to Capacity ratio	0.73											
Actuated Cycle Length (s)	105.2											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	90.4%											
ICU Level of Service	E											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

AM BG 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	168	43	18	121	33	42	199	41	26	82	5
Traffic Volume (vph)	4	168	43	18	121	33	42	199	41	26	82	5
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Util. Factor	0.960			0.971			0.977				0.990	
Flt Protected	0.998			0.995			0.991				0.989	
Satd. Flow (prot)	0	1592	0	0	1654	0	0	1642	0	0	1634	0
Flt Permitted	0.998			0.995			0.991				0.989	
Satd. Flow (perm)	0	1592	0	0	1654	0	0	1642	0	0	1634	0
Link Speed (k/h)	80			80			60				60	
Link Distance (m)	133.8			190.3			256.3				275.8	
Travel Time (s)	6.0			8.6			15.4				16.5	
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Heavy Vehicles (%)	25%	2%	10%	0%	1%	7%	0%	2%	11%	0%	7%	0%
Adj. Flow (vph)	12	191	86	19	132	42	61	229	61	33	99	10
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	289	0	0	193	0	0	351	0	0	142	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)		0.0		0.0		0.0	0.0		0.0		0.0	
Link Offset(m)		0.0		0.0		0.0	0.0		0.0		0.0	
Crosswalk Width(m)		4.8		4.8		4.8	4.8		4.8		4.8	
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25		15		25		15		25		15	
Turning Speed (k/h)		Stop		Stop		Stop	Stop		Stop		Stop	
Sign Control												
Intersection Summary												
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	46.7%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

AM BG 2030
01-25-2024

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	4	168	43	18	121	33	42	199	41	26	82	5
Sign Control	Stop			Stop			Stop			Stop		
Traffic Volume (vph)	4	168	43	18	121	33	42	199	41	26	82	5
Future Volume (vph)	4	168	43	18	121	33	42	199	41	26	82	5
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Hourly flow rate (vph)	12	191	86	19	132	42	61	229	61	33	99	10
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	289	193	351	142								
Volume Left (vph)	12	19	61	33								
Volume Right (vph)	86	42	61	10								
Head (s)	-0.08	-0.07	-0.01	0.09								
Departure Headway (s)	5.6	5.8	5.6	6.1								
Degree Utilization, x	0.45	0.31	0.54	0.24								
Capacity (veh/h)	590	554	605	522								
Control Delay (s)	13.2	11.4	15.0	11.0								
Approach Delay (s)	13.2	11.4	15.0	11.0								
Approach LOS	B	B	B	B								
Intersection Summary												
Delay	13.2											
Level of Service	B											
Intersection Capacity Utilization	46.7%											
ICU Level of Service	A											
Analysis Period (min)	15											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM BG 2030
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	19	383	22	21	315	55	27	125	47	70	54	26
Future Volume (vph)	19	383	22	21	315	55	27	125	47	70	54	26
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00											
Frt Protected	0.950			0.950		0.974		0.950		0.950		0.945
Satd Flow (prot)	1471	3197	0	1662	3051	0	1662	1609	0	1564	1633	0
Flt Permitted	0.508			0.499			0.690			0.633		
Satd Flow (perm)	787	3197	0	872	3051	0	1208	1609	0	1035	1633	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd Flow (RTOR)	14		50		50		40		60		60	
Link Speed (km/h)		50		50		236.3		252.8		159.5		159.5
Link Distance (m)		232.7		236.3			15.2					9.6
Travel Time (s)		16.8		17.0								
Confl. Peds. (#/hr)		1		1								
Peak Hour Factor	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Adj. Flow (vph)	28	407	28	51	346	71	38	132	66	84	66	38
Shared Lane Traffic (%)												
Lane Group Flow (vph)	28	435	0	51	417	0	38	198	0	84	104	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6			3.6			3.6			3.6		3.6
Link Offset(m)	0.0			0.0			0.0			0.0		0.0
Crosswalk Width(m)	4.8			4.8			4.8			4.8		4.8
Two way Left Turn Lane												
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	25	15	25	15	25	15	25	15	25	15	25	15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Leading Detector (m)	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4			9.4			9.4			9.4		9.4
Detector 2 Size(m)	0.6			0.6			0.6			0.6		0.6
Detector 2 Type	Ch+Ex			Ch+Ex			Ch+Ex			Ch+Ex		Ch+Ex
Detector 2 Channel												
Detector 2 Extend (s)	0.0			0.0			0.0			0.0		0.0

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM BG 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases												
Permitted Phases	4	4		8	8		2	2		6	6	
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	5.0		8.0	8.0		8.0	8.0	
Minimum Split (s)	27.0	27.0		27.0	27.0		36.8	36.8		36.8	36.8	
Total Split (s)	37.0	37.0		37.0	37.0		27.8	27.8		27.8	27.8	
Total Split (%)	57.1%	57.1%		57.1%	57.1%		42.9%	42.9%		42.9%	42.9%	
Maximum Green (s)	30.0	30.0		30.0	30.0		20.0	20.0		20.0	20.0	
Yellow Time (s)	4.5	4.5		4.5	4.5		4.5	4.5		4.5	4.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.3	3.3		3.3	3.3	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	2.5	2.5		2.5	2.5		2.5	2.5		2.5	2.5	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	8.0	8.0		8.0	8.0		11.0	11.0		11.0	11.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		18.0	18.0		18.0	18.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	12.4	12.4		12.4	12.4		29.1	29.1		29.1	29.1	
Actuated g/C Ratio	0.22	0.22		0.22	0.22		0.52	0.52		0.52	0.52	
v/c Ratio	0.16	0.61		0.27	0.59		0.06	0.23		0.16	0.12	
Control Delay	19.8	23.0		21.8	20.7		8.0	7.3		8.9	5.9	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	19.8	23.0		21.8	20.7		8.0	7.3		8.9	5.9	
LOS	B	C		C	C		A	A		A	A	
Approach Delay	22.8			20.8			7.4			7.2		
Approach LOS	C			C			A			A		
Queue Length 50th (m)	2.4	21.4		4.6	18.4		1.8	8.1		4.2	3.2	
Queue Length 95th (m)	5.9	33.8		5.2	30.4		5.0	20.4		11.1	9.5	
Internal Link Dist (m)	208.7			212.3			228.8			135.5		
Turn Bay Length (m)	35.0			30.0			15.0			15.0		
Base Capacity (vph)	420	1713		465	1652		623	849		534	861	
Sanctuary Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.07	0.25		0.11	0.25		0.06	0.23		0.16	0.12	
Intersection Summary	Other											
Area Type:												
Cycle Length:	64.8											
Actuated Cycle Length:	56.3											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.61											
Intersection Signal Delay:	17.3											
Intersection LOS:	B											
Intersection Capacity Utilization	54.7%											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	19	383	22	21	315	55	27	125	47	70	54	26
Traffic Volume (vph)	19	383	22	21	315	55	27	125	47	70	54	26
Future Volume (vph)	19	383	22	21	315	55	27	125	47	70	54	26
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.99	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.95
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1471	3199	1661	3052	1662	1609	1554	1633				
Flt Permitted	0.51	1.00	0.50	1.00	0.69	1.00	0.63	1.00				
Satd. Flow (perm)	787	3199	873	3052	1207	1809	1036	1633				
Peak-Hour factor, PHF	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Adj. Flow (vph)	28	407	28	51	346	71	38	132	66	84	66	38
RTOR Reduction (vph)	0	11	0	0	39	0	0	19	0	0	18	0
Lane Group Flow (vph)	28	424	0	51	378	0	38	179	0	84	86	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4			8			2				6	
Permitted Phases	12.4	12.4	12.4	12.4	12.4	12.4	29.0	29.0	29.0	29.0	29.0	29.0
Actuated Green, G (s)	12.4	12.4	12.4	12.4	12.4	12.4	29.0	29.0	29.0	29.0	29.0	29.0
Effective Green, g (s)	0.22	0.22	0.22	0.22	0.22	0.22	0.52	0.52	0.52	0.52	0.52	0.52
Actuated g/C Ratio	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Clearance Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Vehicle Extension (s)	173	705	192	673	622	830	534	842				
Lane Grp Cap (vph)	c0.13			0.12			c0.11					
v/s Ratio Prot	0.04			0.06			0.03					
v/s Ratio Perm	0.16	0.60	0.27	0.56	0.06	0.22	0.16	0.10				
Uniform Delay, d1	17.7	19.7	18.1	19.5	6.8	7.4	7.2	6.9				
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00				
Incremental Delay, d2	0.3	1.2	0.5	0.9	0.2	0.6	0.6	0.2				
Delay (s)	18.0	20.9	18.7	20.4	7.0	8.0	7.8	7.2				
Level of Service	B	C	B	C	A	A	A	A				
Approach Delay (s)	20.7		20.2		7.8		7.5					
Approach LOS	C		C		A		A					
Intersection Summary												
HCM 2000 Control Delay	16.5						B					
HCM 2000 Volume to Capacity ratio	0.33											
Actuated Cycle Length (s)	56.2						14.8					
Intersection Capacity Utilization	54.7%						A					
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM BG 2030
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	4	4	5	4	4	5	4	4	5	4	4
Traffic Volume (vph)	55	396	64	172	273	52	89	248	357	94	268	50
Future Volume (vph)	55	396	64	172	273	52	89	248	357	94	268	50
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Ped Bike Factor	0.99	1.00	0.99	0.99	1.00	0.99	0.99	1.00	0.99	1.00	0.99	1.00
Frt	0.978	0.978	0.978	0.978	0.978	0.978	0.978	0.978	0.978	0.978	0.978	0.978
Flt Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1539	3068	0	1525	2980	0	1614	2917	0	1568	3144	0
Flt Permitted	0.509	0.287	0.287	0.509	0.287	0.287	0.509	0.287	0.287	0.509	0.287	0.287
Satd. Flow (perm)	817	3068	0	458	2980	0	886	2917	0	375	3144	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	16	50	26	16	50	26	16	50	26	16	50	26
Link Speed (km/h)	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9
Link Distance (m)	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.8
Travel Time (s)	12	12	12	12	12	12	12	12	12	12	12	12
Confl. Peds. (#/hr)	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Peak Hour Factor	8%	5%	9%	7%	9%	3%	3%	4%	6%	2%	5%	5%
Adj. Flow (vph)	61	440	74	215	329	85	98	292	452	122	315	65
Shared Lane Traffic (%)	61	514	0	215	414	0	98	744	0	122	380	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM BG 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	31.8	20.2	41.0	28.5	43.0	30.4	44.8	33.1	44.8	33.1	44.8	33.1
Actuated g/C Ratio	0.34	0.22	0.44	0.30	0.46	0.32	0.48	0.35	0.48	0.35	0.48	0.35
v/c Ratio	0.18	0.76	0.60	0.45	0.21	0.65	0.41	0.34	0.41	0.34	0.41	0.34
Control Delay	17.0	41.9	24.6	26.8	16.0	19.8	19.4	25.1	19.4	25.1	19.4	25.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	17.0	41.9	24.6	26.8	16.0	19.8	19.4	25.1	19.4	25.1	19.4	25.1
LOS	B	D	C	C	B	B	B	C	B	C	B	C
Approach Delay	39.3	26.0	26.0	26.0	19.4	19.4	23.7	23.7	23.7	23.7	23.7	23.7
Approach LOS	D	C	C	C	B	B	C	C	B	C	C	C
Queue Length 50th (m)	6.5	46.5	25.7	31.6	9.5	38.4	12.0	26.8	12.0	26.8	12.0	26.8
Queue Length 95th (m)	14.5	71.5	37.7	43.7	23.3	63.2	23.7	46.5	23.7	46.5	23.7	46.5
Internal Link Dist (m)	264.9	264.9	267.8	267.8	258.2	258.2	204.1	204.1	204.1	204.1	204.1	204.1
Turn Bay Length (m)	25.0	117.1	488	1159	526	1152	338	1122	338	1122	338	1122
Base Capacity (vph)	552	1171	488	1159	526	1152	338	1122	338	1122	338	1122
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.11	0.44	0.44	0.36	0.19	0.65	0.36	0.34	0.36	0.34	0.36	0.34
Intersection Summary	Intersection LOS: C											
Area Type:	Other											
Cycle Length:	122											
Actuated Cycle Length:	93.7											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.76											
Intersection Signal Delay:	26.4											
Intersection Capacity Utilization	76.8%											
ICU Level of Service D												

Analysis Period (min) 15



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	55	396	64	172	273	52	89	248	357	94	268	50
Future Volume (vph)	55	396	64	172	273	52	89	248	357	94	268	50
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.91	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1533	3071	1523	2984	1608	2917	1568	3147	1568	3147	1568	3147
Flt Permitted	0.51	1.00	0.29	1.00	0.53	1.00	0.53	1.00	0.23	1.00	0.23	1.00
Satd. Flow (perm)	822	3071	460	2984	891	2917	891	2917	375	3147	375	3147
Peak-Hour factor, PHF	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Adj. Flow (vph)	61	440	74	215	329	85	98	292	452	122	315	65
RTOR Reduction (vph)	0	12	0	0	18	0	0	205	0	0	12	0
Lane Group Flow (vph)	61	502	0	215	396	0	98	539	0	122	368	0
Confl. Peds. (#/hr)	12	12	12	12	12	12	13	13	13	13	13	13
Heavy Vehicles (%)	8%	5%	9%	9%	7%	9%	3%	3%	4%	6%	2%	5%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4	3	8	5	2	2	1	6	1	6	6
Permitted Phases	4	27.0	20.9	37.6	28.5	38.2	31.1	42.2	33.1	42.2	33.1	33.1
Actuated Green, G (s)	27.0	20.9	37.6	28.5	38.2	31.1	42.2	33.1	42.2	33.1	33.1	33.1
Effective Green, g (s)	0.28	0.22	0.40	0.30	0.40	0.33	0.40	0.33	0.45	0.35	0.45	0.35
Actuated g/C Ratio	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Clearance Time (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Vehicle Extension (s)	279	677	336	897	412	966	281	1098	60.04	0.12	0.12	0.12
Lane Grp Cap (vph)	0.01	c0.16	c0.09	0.13	0.02	c0.18	0.02	c0.18	0.15	0.43	0.33	0.33
v/s Ratio Prot	0.05	0.16	0.64	0.44	0.24	0.56	0.43	0.33	0.15	0.43	0.33	0.33
v/c Ratio	0.22	0.74	0.64	0.44	0.24	0.56	0.43	0.33	0.15	0.43	0.33	0.33
Uniform Delay, d1	25.2	34.4	20.7	26.7	18.0	26.3	16.9	22.7	10.0	1.00	1.00	1.00
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	4.2	3.6	0.3	0.2	2.4	0.8	0.8	0.8	0.8	0.8	0.8
Delay (s)	25.6	38.6	24.3	27.0	18.2	28.7	17.7	23.6	11.8	1.8	1.8	1.8
Level of Service	C	D	C	C	B	C	B	C	B	C	C	C
Approach Delay (s)	37.2	26.1	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4	27.4
Approach LOS	D	C	C	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	28.3											
HCM 2000 Level of Service	C											
HCM 2000 Volume to Capacity ratio	0.61											
Actuated Cycle Length (s)	94.8											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	76.8%											
ICU Level of Service	D											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

PM BG 2030
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	197	50	41	189	20	27	149	23	29	192	8
Traffic Volume (vph)	5	197	50	41	189	20	27	149	23	29	192	8
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Util. Factor	0.974	0.974	0.974	0.986	0.986	0.986	0.983	0.983	0.983	0.983	0.983	0.983
Flt Protected	0.999	0.999	0.999	0.992	0.992	0.992	0.995	0.995	0.995	0.995	0.995	0.995
Satd. Flow (prot)	0	1703	0	0	1699	0	0	1712	0	0	1718	0
Flt Permitted	0.999	0.999	0.999	0.992	0.992	0.992	0.995	0.995	0.995	0.995	0.995	0.995
Satd. Flow (perm)	0	1703	0	0	1699	0	0	1712	0	0	1718	0
Link Speed (k/h)	80	80	80	80	80	80	80	80	80	80	80	80
Link Distance (m)	133.8	133.8	133.8	190.3	190.3	190.3	256.3	256.3	256.3	256.3	256.3	256.3
Travel Time (s)	6.0	6.0	6.0	8.6	8.6	8.6	15.4	15.4	15.4	15.4	15.4	15.4
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Adj. Flow (vph)	5	235	56	51	225	33	28	194	32	37	267	14
Shared Lane Traffic (%)	0	296	0	0	309	0	0	254	0	0	318	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Right	Right
Median Width(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	25	15	25	25	15	25	25	15
Turning Speed (k/h)	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Intersection Summary	Other											
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	56.8%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

PM BG 2030
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	197	50	41	189	20	27	149	23	29	192	8
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Traffic Volume (vph)	5	197	50	41	189	20	27	149	23	29	192	8
Future Volume (vph)	5	197	50	41	189	20	27	149	23	29	192	8
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Hourly flow rate (vph)	5	235	56	51	225	33	28	194	32	37	267	14
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	296	309	254	318								
Volume Left (vph)	5	51	28	37								
Volume Right (vph)	56	33	32	14								
Head (s)	-0.11	-0.02	-0.05	0.01								
Departure Headway (s)	6.5	6.5	6.7	6.5								
Degree Utilization, x	0.53	0.56	0.47	0.58								
Capacity (veh/h)	500	499	489	499								
Control Delay (s)	16.6	17.5	15.4	18.2								
Approach Delay (s)	16.6	17.5	15.4	18.2								
Approach LOS	C	C	C	C								
Intersection Summary												
Delay	17.0											
Level of Service	C											
Intersection Capacity Utilization	56.8%											
Analysis Period (min)	15											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM BG 2030
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	19	520	47	56	453	101	22	115	47	78	135	25
Future Volume (vph)	19	520	47	56	453	101	22	115	47	78	135	25
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0	0.0	30.0	0.0	15.0	0.0	15.0	0.0	15.0	0.0	15.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Flt Protected	0.950	0.985	0.950	0.950	0.965	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1662	3182	0	1662	3161	0	1662	1637	0	1662	1686	0
Flt Permitted	0.318	0.370	0.370	0.370	0.370	0.370	0.370	0.370	0.370	0.370	0.370	0.370
Satd. Flow (perm)	556	3182	0	647	3161	0	1059	1637	0	1102	1686	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	25	81	0	81	0	0	39	0	0	18	0	0
Link Speed (km/h)	50	50	50	50	50	50	50	50	50	50	50	50
Link Distance (m)	232.7	236.3	236.3	236.3	236.3	236.3	252.8	252.8	252.8	252.8	252.8	252.8
Travel Time (s)	16.8	16.8	16.8	16.8	16.8	16.8	15.2	15.2	15.2	15.2	15.2	15.2
Conf. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Peak Hour Factor	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Heavy Vehicles (%)	0%	3%	0%	0%	1%	0%	1%	3%	0%	0%	0%	5%
Adj. Flow (vph)	28	531	61	70	503	151	28	137	66	89	169	38
Shared Lane Traffic (%)	28	592	0	70	654	0	28	203	0	89	207	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM BG 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases	4	4	4	8	8	8	2	2	2	6	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase	10.0	10.0	10.0	5.0	5.0	5.0	8.0	8.0	8.0	8.0	8.0	8.0
Switch Phase	27.0	27.0	27.0	27.0	27.0	27.0	36.8	36.8	36.8	36.8	36.8	36.8
Minimum Split (s)	37.0	37.0	37.0	37.0	37.0	37.0	27.8	27.8	27.8	27.8	27.8	27.8
Total Split (s)	57.1%	57.1%	57.1%	57.1%	57.1%	57.1%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%
Total Split (%)	30.0	30.0	30.0	30.0	30.0	30.0	20.0	20.0	20.0	20.0	20.0	20.0
Maximum Green (s)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Yellow Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Total Lost Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lead/Lag	None	None	None	None	None	None	Max	Max	Max	Max	Max	Max
Lead-Lag Optimize?	12.0	12.0	12.0	12.0	12.0	12.0	18.0	18.0	18.0	18.0	18.0	18.0
Vehicle Extension (s)	0	0	0	0	0	0	0	0	0	0	0	0
Recall Mode	16.0	16.0	16.0	16.0	16.0	16.0	29.1	29.1	29.1	29.1	29.1	29.1
Walk Time (s)	0.27	0.27	0.27	0.27	0.27	0.27	0.48	0.48	0.48	0.48	0.48	0.48
Flash Dont Walk (s)	0.19	0.68	0.41	0.73	0.05	0.25	0.05	0.25	0.17	0.25	0.17	0.25
Pedestrian Calls (#/hr)	19.6	23.0	25.4	22.3	10.2	9.2	11.2	10.3	11.2	10.3	11.2	10.3
Act Effct Green (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Aduated g/C Ratio	19.6	23.0	25.4	22.3	10.2	9.2	11.2	10.3	11.2	10.3	11.2	10.3
v/c Ratio	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Control Delay	19.6	23.0	25.4	22.3	10.2	9.2	11.2	10.3	11.2	10.3	11.2	10.3
Queue Delay	19.6	23.0	25.4	22.3	10.2	9.2	11.2	10.3	11.2	10.3	11.2	10.3
Total Delay	22.9	22.9	22.9	22.6	22.6	22.6	9.3	9.3	9.3	10.5	10.5	10.5
LOS	C	C	C	C	C	C	A	A	A	B	B	B
Approach Delay	2.5	30.6	6.6	31.3	1.6	9.9	5.2	11.5	5.2	11.5	5.2	11.5
Approach LOS	5.9	45.2	14.6	47.2	5.5	23.3	15.0	24.2	15.0	24.2	15.0	24.2
Queue Length 50th (m)	208.7	208.7	208.7	212.3	212.3	212.3	228.8	228.8	228.8	228.8	228.8	228.8
Queue Length 95th (m)	35.0	35.0	35.0	35.0	35.0	35.0	15.0	15.0	15.0	15.0	15.0	15.0
Internal Link Dist (m)	279	1611	325	1628	533	815	535	828	535	828	535	828
Turn Bay Length (m)	0	0	0	0	0	0	0	0	0	0	0	0
Base Capacity (vph)	0	0	0	0	0	0	0	0	0	0	0	0
Sanction Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.10	0.37	0.22	0.40	0.05	0.25	0.17	0.25	0.17	0.25	0.17	0.25
Intersection Summary	Intersection LOS: B ICU Level of Service C											
Area Type:	Other											
Cycle Length:	64.8											
Actuated Cycle Length:	60											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.73											
Intersection Signal Delay:	19.1											
Intersection Capacity Utilization	66.5%											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	1	1	1	1	1	1	1	1	1	1	1
Traffic Volume (vph)	19	520	47	56	453	101	22	115	47	78	135	25
Future Volume (vph)	19	520	47	56	453	101	22	115	47	78	135	25
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frft	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1662	3181	1661	3162	1662	3162	1662	1638	1662	1662	1662	1686
Flt Permitted	0.32	1.00	0.37	1.00	0.37	1.00	0.63	1.00	0.63	1.00	0.63	1.00
Satd. Flow (perm)	556	3181	647	3162	1099	1638	1103	1686	1103	1686	1103	1686
Peak-Hour factor, PHF	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Adj. Flow (vph)	28	531	61	70	503	151	28	137	66	89	169	38
RTOR Reduction (vph)	0	18	0	0	59	0	0	20	0	0	9	0
Lane Group Flow (vph)	28	574	0	70	595	0	28	183	0	89	198	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	0%	3%	0%	0%	1%	1%	0%	1%	3%	0%	0%	5%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4	4	8	8	8	8	2	2	6	6	6	6
Permitted Phases	4	4	8	8	8	8	2	2	6	6	6	6
Actuated Green, G (s)	16.0	16.0	16.0	16.0	16.0	16.0	29.1	29.1	29.1	29.1	29.1	29.1
Effective Green, g (s)	16.0	16.0	16.0	16.0	16.0	16.0	29.1	29.1	29.1	29.1	29.1	29.1
Actuated g/C Ratio	0.27	0.27	0.27	0.27	0.27	0.27	0.49	0.49	0.49	0.49	0.49	0.49
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	148	849	172	844	533	795	535	819	535	819	535	819
v/s Ratio Prot	0.18	0.18	0.11	0.19	0.11	0.11	0.08	0.12	0.08	0.12	0.08	0.12
v/s Ratio Perm	0.05	0.19	0.68	0.41	0.70	0.05	0.23	0.17	0.24	0.17	0.24	0.24
Uniform Delay, d1	16.9	19.6	18.0	19.8	8.1	8.9	8.6	9.0	8.6	9.0	8.6	9.0
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.5	1.9	1.1	2.5	0.2	0.7	0.7	0.7	0.7	0.7	0.7	0.7
Delay (s)	17.4	21.6	19.2	22.3	8.3	9.6	9.3	9.7	9.3	9.7	9.3	9.7
Level of Service	B	C	B	C	A	A	A	A	A	A	A	A
Approach Delay (s)	21.4	21.4	22.0	22.0	9.4	9.4	9.6	9.6	9.6	9.6	9.6	9.6
Approach LOS	C	C	C	C	A	A	A	A	A	A	A	A
Intersection Summary												
HCM 2000 Control Delay	18.3											
HCM 2000 Volume to Capacity ratio	0.41											
Actuated Cycle Length (s)	59.9											
Intersection Capacity Utilization	66.5%											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM BG 2030
01-25-2024


	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	4	4	1	4	4	1	4	4	1	4	4
Traffic Volume (vph)	110	488	83	357	511	87	104	288	292	105	377	64
Future Volume (vph)	110	488	83	357	511	87	104	288	292	105	377	64
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Per Bike Factor	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.99	0.99	0.99	0.99
Fit	0.977	0.977	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975	0.975
Fit Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1662	3139	0	1662	3169	0	1662	2955	0	1630	3149	0
Fit Permitted	0.378	0.196	0.196	0.196	0.196	0.196	0.342	0.196	0.196	0.276	0.196	0.196
Satd. Flow (perm)	658	3139	0	339	3169	0	592	2955	0	470	3149	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	17	19	31	19	31	15	23	214	17	17	21	23
Link Speed (km/h)	50	50	50	50	50	50	50	282.2	50	50	228.1	50
Link Distance (m)	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9
Travel Time (s)	20.8	20.8	20.8	20.8	20.8	20.8	20.8	20.3	20.8	20.3	16.4	20.8
Conf. Peds. (#/hr)	15	31	31	15	31	15	23	214	17	17	21	23
Peak Hour Factor	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.69
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	155	542	99	430	601	118	163	300	328	122	419	93
Shared Lane Traffic (%)	155	641	0	430	719	0	163	628	0	122	512	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Left	Right
Median Width (m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width (m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	15	15	25	15	15	25	15	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size (m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position (m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size (m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM BG 2030
01-25-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	4	3	8	8	5	2	1	6	1	6
Permitted Phases	4	4	4	8	8	8	2	2	6	6	6	6
Detector Phase	7	4	4	3	8	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	Max	None	Max	None	Max
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Eff. Green (s)	41.4	26.8	41.4	26.8	41.4	26.8	45.9	31.2	44.0	30.2	44.0	30.2
Actuated g/C Ratio	0.37	0.24	0.51	0.36	0.41	0.28	0.41	0.28	0.40	0.27	0.40	0.27
v/c Ratio	0.45	0.83	0.95	0.63	0.95	0.63	0.47	0.64	0.42	0.59	0.42	0.59
Control Delay	20.2	49.6	57.2	32.0	26.5	27.4	26.5	27.4	26.1	38.4	26.1	38.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	20.2	49.6	57.2	32.0	26.5	27.4	26.5	27.4	26.1	38.4	26.1	38.4
LOS	C	D	D	E	C	C	C	C	C	C	C	D
Approach Delay	43.9	43.9	41.4	41.4	41.4	41.4	27.2	27.2	27.2	36.0	27.2	36.0
Approach LOS	D	D	D	D	D	D	C	C	C	D	C	D
Queue Length 50th (m)	18.6	74.1	72.6	70.4	23.9	45.3	23.9	45.3	17.4	53.5	17.4	53.5
Queue Length 95th (m)	23.2	96.0	#116.5	88.1	29.5	73.1	29.5	73.1	32.0	78.4	32.0	78.4
Internal Link Dist (m)	264.9	264.9	264.9	267.8	267.8	267.8	258.2	258.2	204.1	204.1	204.1	204.1
Turn Bay Length (m)	25.0	100.7	474	1172	364	981	20.0	364	320	871	320	871
Base Capacity (vph)	553	1007	474	1172	364	981	0	364	320	871	320	871
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.28	0.64	0.91	0.61	0.45	0.64	0.45	0.64	0.38	0.59	0.38	0.59
Intersection Summary	Intersection LOS: D ICU Level of Service F											
Area Type:	Other											
Cycle Length:	122											
Actuated Cycle Length:	111.2											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.95											
Intersection Signal Delay:	37.7											
Intersection Capacity Utilization	93.6%											

Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	110	488	83	357	511	87	104	288	292	105	377	64
Future Volume (vph)	110	488	83	357	511	87	104	288	292	105	377	64
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frpb, ped/bikes	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.98	1.00	0.99	1.00	0.99
Flpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.98	1.00	0.98	1.00	0.92	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1658	3140	1660	3172	1657	2957	1657	2957	1627	3150	1627	3150
Flt Permitted	0.38	1.00	0.20	1.00	0.34	1.00	0.34	1.00	0.28	1.00	0.28	1.00
Satd. Flow (perm)	660	3140	343	3172	697	2957	697	2957	473	3150	473	3150
Peak-Hour factor, PHF	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.89
Adj. Flow (vph)	155	542	99	430	601	118	162	300	328	122	419	93
RTOR Reduction (vph)	0	13	0	0	12	0	0	154	0	0	15	0
Lane Group Flow (vph)	155	628	0	430	707	0	163	474	0	122	497	0
Confl. Peds. (#/hr)	15	31	31	31	31	15	23	17	17	17	23	23
Heavy Vehicles (%)	0%	3%	1%	0%	0%	0%	0%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	5	2	5	2	1	6	1	6
Permitted Phases	4	8	8	8	2	2	2	2	6	6	6	6
Actuated Green, G (s)	37.5	26.8	53.2	39.5	41.9	31.2	40.1	30.3	40.1	30.3	40.1	30.3
Effective Green, g (s)	37.5	26.8	53.2	39.5	41.9	31.2	40.1	30.3	40.1	30.3	40.1	30.3
Actuated g/C Ratio	0.34	0.24	0.48	0.36	0.38	0.28	0.36	0.27	0.36	0.27	0.36	0.27
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	318	756	441	1126	326	829	272	858	272	858	272	858
v/s Ratio Prot	0.05	0.20	c0.21	0.22	c0.05	c0.16	0.04	0.16	0.04	0.16	0.04	0.16
v/s Ratio Perm	0.12	0.26	0.26	0.26	0.14	0.12	0.12	0.12	0.12	0.12	0.12	0.12
v/c Ratio	0.49	0.83	0.98	0.63	0.50	0.57	0.45	0.58	0.45	0.58	0.45	0.58
Uniform Delay, d1	26.9	40.0	27.2	29.7	24.3	34.3	25.1	34.9	25.1	34.9	25.1	34.9
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.9	7.6	36.1	1.0	0.9	2.9	0.9	2.8	0.9	2.8	0.9	2.8
Delay (s)	27.9	47.7	63.2	30.7	25.3	37.1	26.0	37.8	26.0	37.8	26.0	37.8
Level of Service	C	D	E	C	C	D	C	D	C	D	C	D
Approach Delay (s)	43.8	42.9	34.7	34.7	34.7	34.7	34.7	34.7	34.7	34.7	34.7	34.7
Approach LOS	D	D	C	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	39.8											
HCM 2000 Level of Service	D											
HCM 2000 Volume to Capacity ratio	0.82											
Actuated Cycle Length (s)	111.2											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	93.6%											
ICU Level of Service	F											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

AM TT 2025
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔		↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	4	105	14	19	109	30	44	185	43	23	77	4
Future Volume (vph)	4	105	14	19	109	30	44	185	43	23	77	4
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	0.976	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971
Flt Protected	0.996	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994
Satd. Flow (prot)	0	1618	0	0	1653	0	0	1637	0	0	1635	0
Flt Permitted	0.996	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994	0.994
Satd. Flow (perm)	0	1618	0	0	1653	0	0	1637	0	0	1635	0
Link Speed (k/h)	80	80	80	80	80	80	80	80	80	80	80	80
Link Distance (m)	133.8	190.3	190.3	256.3	275.8	275.8	275.8	275.8	275.8	275.8	275.8	275.8
Travel Time (s)	6.0	8.6	8.6	15.4	16.5	16.5	16.5	16.5	16.5	16.5	16.5	16.5
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Heavy Vehicles (%)	25%	2%	10%	0%	1%	7%	0%	2%	11%	0%	7%	0%
Adj. Flow (vph)	12	119	28	20	118	38	64	213	64	29	93	8
Shared Lane Traffic (%)	0	159	0	0	176	0	0	341	0	0	130	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	25	15	25	15	25	25	15	15
Turning Speed (k/h)	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Intersection Summary	Other											
Area Type:	Other											
Control Type:	Unsignalized											
Intersection Capacity Utilization	42.3%											
Analysis Period (min)	15											

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

AM TT 2025
01-25-2024

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔			↔	
Sign Control		Stop			Stop			Stop			Stop	
Traffic Volume (vph)	4	105	14	19	109	30	44	185	43	23	77	4
Future Volume (vph)	4	105	14	19	109	30	44	185	43	23	77	4
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Hourly flow rate (vph)	12	119	28	20	118	38	64	213	64	29	93	8
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	159	176	341	130								
Volume Left (vph)	12	20	64	29								
Volume Right (vph)	28	38	64	8								
Head (s)	0.00	-0.07	-0.02	0.09								
Departure Headway (s)	5.4	5.4	5.0	5.4								
Degree Utilization, x	0.24	0.26	0.48	0.20								
Capacity (veh/h)	598	611	674	602								
Control Delay (s)	10.2	10.2	12.5	9.8								
Approach Delay (s)	10.2	10.2	12.5	9.8								
Approach LOS	B	B	B	A								
Intersection Summary												
Delay	11.1											
Level of Service	B											
Intersection Capacity Utilization	42.3%											
Analysis Period (min)	15											
ICU Level of Service												A

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM TT 2025
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	24	347	20	19	285	69	24	116	42	100	54	36
Future Volume (vph)	24	347	20	19	285	69	24	116	42	100	54	36
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Pad Bike Factor	1.00											
Frt Protected	0.950			0.950		0.967		0.951		0.950		0.934
Satd. Flow (prot)	1471	3197	0	1662	3036	0	1662	1611	0	1554	1616	0
Flt Permitted	0.516		0.519				0.681			0.643		
Satd. Flow (perm)	799	3197	0	907	3036	0	1192	1611	0	1052	1616	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)	14		74		50		39		60		52	
Link Speed (km/h)	50		50		236.3		252.8		159.5		159.5	
Link Distance (m)	232.7		16.8		17.0		15.2		9.6		9.6	
Travel Time (s)												
Confl. Peds. (#/hr)		1										
Peak Hour Factor	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Heavy Vehicles (%)	13%	3%	0%	7%	2%	0%	1%	8%	7%	2%	0%	5%
Adj. Flow (vph)	36	369	25	46	313	88	33	122	59	120	66	52
Shared Lane Traffic (%)												
Lane Group Flow (vph)	36	394	0	46	401	0	33	181	0	120	118	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6		3.6		3.6		3.6		3.6		3.6	
Link Offset(m)	0.0		0.0		0.0		0.0		0.0		0.0	
Crosswalk Width(m)	4.8		4.8		4.8		4.8		4.8		4.8	
Two way Left Turn Lane												
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	25	15	25	15	25	15	25	15	25	15	25	15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Leading Detector (m)	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4		9.4		9.4		9.4		9.4		9.4	
Detector 2 Size(m)	0.6		0.6		0.6		0.6		0.6		0.6	
Detector 2 Type	Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	


Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM TT 2025
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases												
Permitted Phases	4	4		8	8		2	2		6	6	
Detector Phase												
Switch Phase	10.0	10.0		5.0	5.0		8.0	8.0		8.0	8.0	
Minimum Initial (s)	27.0	27.0		27.0	27.0		36.8	36.8		36.8	36.8	
Minimum Split (s)	37.0	37.0		37.0	37.0		27.8	27.8		27.8	27.8	
Total Split (s)												
Total Split (%)	57.1%	57.1%		57.1%	57.1%		42.9%	42.9%		42.9%	42.9%	
Maximum Green (s)	30.0	30.0		30.0	30.0		20.0	20.0		20.0	20.0	
Yellow Time (s)	4.5	4.5		4.5	4.5		4.5	4.5		4.5	4.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.3	3.3		3.3	3.3	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	2.5	2.5		2.5	2.5		2.5	2.5		2.5	2.5	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	8.0	8.0		8.0	8.0		11.0	11.0		11.0	11.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		18.0	18.0		18.0	18.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	11.7	11.7		11.7	11.7		29.0	29.0		29.0	29.0	
Actuated g/C Ratio	0.21	0.21		0.21	0.21		0.52	0.52		0.52	0.52	
v/c Ratio	0.21	0.58		0.24	0.57		0.05	0.21		0.22	0.14	
Control Delay	21.3	22.5		21.5	19.4		7.5	6.7		9.1	5.2	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	21.3	22.5		21.5	19.4		7.5	6.7		9.1	5.2	
LOS	C	C		C	B		A	A		A	A	
Approach Delay	22.4			19.6			6.8			7.1		
Approach LOS	C			B			A			A		
Queue Length 50th (m)	3.2	19.1		4.1	16.2		1.5	6.9		6.0	3.1	
Queue Length 95th (m)	7.1	30.7		4.9	27.9		4.4	18.0		14.5	9.4	
Internal Link Dist (m)		208.7			212.3			228.8			135.5	
Turn Bay Length (m)	35.0			30.0			15.0			15.0		
Base Capacity (vph)	431	1733		489	1674		622	860		549	869	
Sanctuary Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.08	0.23		0.09	0.24		0.05	0.21		0.22	0.14	
Intersection Summary	Other											
Area Type:												
Cycle Length:	64.8											
Actuated Cycle Length:	55.6											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.58											
Intersection Signal Delay:	16.2											
Intersection Capacity Utilization	56.6%											
Intersection LOS:	B											
ICU Level of Service B												

Analysis Period (min) 15

Splits and Phases: 102: Garner Rd & Lundy's Ln




HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	24	347	20	19	285	69	24	116	42	100	54	36
Future Volume (vph)	24	347	20	19	285	69	24	116	42	100	54	36
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.99	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.93
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1471	3199	1661	3036	1661	3036	1662	1612	1554	1616	1554	1616
Flt Permitted	0.52	1.00	0.52	1.00	0.52	1.00	0.68	1.00	0.64	1.00	0.64	1.00
Satd. Flow (perm)	799	3199	908	3036	799	3036	1192	1612	1052	1616	1052	1616
Peak-Hour factor, PHF	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Adj. Flow (vph)	36	369	25	46	313	88	33	122	59	120	66	52
RTOR Reduction (vph)	0	11	0	0	58	0	0	19	0	0	25	0
Lane Group Flow (vph)	36	383	0	46	343	0	33	162	0	120	93	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4	4	4	8	8	8	2	2	2	2	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	2	6	6
Actuated Green, G (s)	11.7	11.7	11.7	11.7	11.7	11.7	29.0	29.0	29.0	29.0	29.0	29.0
Effective Green, g (s)	11.7	11.7	11.7	11.7	11.7	11.7	29.0	29.0	29.0	29.0	29.0	29.0
Actuated g/C Ratio	0.21	0.21	0.21	0.21	0.21	0.21	0.52	0.52	0.52	0.52	0.52	0.52
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	168	674	191	640	640	622	842	842	549	844	549	844
v/s Ratio Prot	c0.12	c0.12	c0.12	0.11	0.11	0.11	0.10	0.10	c0.11	c0.11	c0.11	c0.11
v/s Ratio Perm	0.05	0.05	0.05	0.05	0.05	0.05	0.03	0.03	0.03	0.03	0.03	0.03
Uniform Delay, d1	18.1	19.6	18.2	19.5	19.5	19.5	6.5	7.0	7.1	6.7	7.1	6.7
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.5	0.9	0.5	0.7	0.7	0.7	0.2	0.5	0.9	0.3	0.9	0.3
Delay (s)	18.6	20.5	18.7	20.2	20.2	20.2	6.7	7.5	8.1	7.0	8.1	7.0
Level of Service	B	C	B	C	C	C	A	A	A	A	A	A
Approach Delay (s)	20.4	20.4	20.4	20.0	20.0	20.0	7.4	7.4	7.5	7.5	7.5	7.5
Approach LOS	C	C	C	C	C	C	A	A	A	A	A	A
Intersection Summary												
HCM 2000 Control Delay	15.9											
HCM 2000 Volume to Capacity ratio	0.32											
Actuated Cycle Length (s)	55.5											
Intersection Capacity Utilization	56.6%											
Analysis Period (min)	15											
c Critical Lane Group												

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	50	395	58	156	266	47	81	225	324	85	243	46
Traffic Volume (vph)	50	395	58	156	266	47	81	225	324	85	243	46
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Length (m)	1	0	1	0	1	0	1	0	1	0	1	0
Storage Lanes	7.5	0	7.5	0	7.5	0	7.5	0	7.5	0	7.5	0
Taper Length (m)	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Lane Util. Factor	0.99	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.99	1.00	0.99	1.00
Ped Bike Factor	0.980	0.980	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971
Flt Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1539	3077	0	1525	2988	0	1614	2917	0	1568	3144	0
Flt Permitted	0.518	0.295	0.295	0.544	0.544	0.544	0.544	0.544	0.544	0.274	0.274	0.544
Satd. Flow (perm)	831	3077	0	471	2988	0	916	2917	0	452	3144	0
Right Turn on Red	14	Yes	Yes	24	Yes	Yes	30.3	Yes	Yes	19	Yes	Yes
Satd. Flow (RTOR)	50	288.9	291.8	282.2	282.2	282.2	282.2	282.2	282.2	282.2	282.2	282.2
Link Speed (km/h)	20.8	20.8	21.0	20.3	20.3	20.3	20.3	20.3	20.3	20.3	20.3	20.3
Link Distance (m)	12	12	12	12	12	12	12	12	12	12	12	12
Travel Time (s)	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Peak Hour Factor	8%	5%	9%	9%	7%	9%	3%	3%	4%	6%	2%	5%
Heavy Vehicles (%)	56	439	67	195	320	77	89	265	410	110	286	60
Adj. Flow (vph)	56	506	0	195	397	0	89	675	0	110	346	0
Shared Lane Traffic (%)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	5	2	1	6	2	1	6	2
Permitted Phases	4	4	8	8	2	6	6	6	6	6	6	6
Detector Phase	7	4	3	8	5	2	1	6	2	1	6	2
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	10.0	6.0	10.0	6.0	10.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	28.0	42.0	28.0	42.0	28.0	42.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%
Total Split (%)	25.0	35.0	25.0	35.0	25.0	35.0	25.0	35.0	25.0	35.0	25.0	35.0
Maximum Green (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
Yellow Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Total Lost Time (s)	Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lag
Lead/Lag	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lead-Lag Optimize?	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Vehicle Extension (s)	None	None	None	None	None	None	None	None	None	None	None	None
Recall Mode	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Walk Time (s)	19.0	19.0	11.0	11.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Flash Dont Walk (s)	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrian Calls (#/hr)	31.0	19.7	39.5	27.2	42.6	30.4	44.4	33.0	44.4	33.0	44.4	33.0
Act Effct Green (s)	0.34	0.21	0.43	0.30	0.46	0.33	0.48	0.36	0.48	0.36	0.48	0.36
Actuated g/C Ratio	0.17	0.76	0.56	0.44	0.18	0.58	0.34	0.30	0.34	0.30	0.34	0.30
v/c Ratio	16.9	41.0	23.4	26.8	15.2	17.0	17.2	23.6	15.2	17.0	17.2	23.6
Control Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	16.9	41.0	23.4	26.8	15.2	17.0	17.2	23.6	15.2	17.0	17.2	23.6
Total Delay	B	D	C	C	B	B	B	C	B	B	C	C
LOS	Approach Delay	38.6	25.7	25.7	16.8	16.8	22.1	22.1	16.8	16.8	22.1	22.1
Approach Delay	Approach LOS	D	C	C	B	B	C	C	B	B	C	C
Queue Length 50th (m)	5.9	44.8	22.7	29.9	8.2	28.3	10.3	23.1	8.2	28.3	10.3	23.1
Queue Length 95th (m)	13.4	69.5	34.5	42.0	20.8	52.0	21.1	40.9	20.8	52.0	21.1	40.9
Internal Link Dist (m)	264.9	264.9	267.8	267.8	258.2	258.2	204.1	204.1	258.2	258.2	204.1	204.1
Turn Bay Length (m)	25.0	553	1197	493	1174	546	1168	372	1143	372	1143	372
Base Capacity (vph)	0	0	0	0	0	0	0	0	0	0	0	0
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.10	0.42	0.40	0.34	0.16	0.58	0.30	0.30	0.16	0.58	0.30	0.30
Intersection Summary	Area Type:	Other										
Area Type:	Cycle Length:	122										
Actuated Cycle Length:	91.7											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.76											
Intersection Signal Delay:	25.2											
Intersection LOS:	C											
Intersection Capacity Utilization:	75.4%											
ICU Level of Service:	D											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
103: Kalar Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↶	↷	↷	↶	↷	↷	↶	↷	↷	↶	↷	↷
Traffic Volume (vph)	50	395	58	156	266	47	81	225	324	85	243	46
Future Volume (vph)	50	395	58	156	266	47	81	225	324	85	243	46
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	7.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.91	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1533	3079	1523	2990	1608	2917	1568	3146	1568	3146	1568	3146
Flt Permitted	0.52	1.00	0.29	1.00	0.54	1.00	0.54	1.00	0.27	1.00	0.27	1.00
Satd. Flow (perm)	836	3079	473	2990	921	2917	453	3146	453	3146	453	3146
Peak-Hour factor, PHF	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Adj. Flow (vph)	56	439	67	195	320	77	89	265	410	110	286	60
RTOR Reduction (vph)	0	11	0	0	17	0	0	202	0	0	12	0
Lane Group Flow (vph)	56	495	0	195	380	0	89	473	0	110	334	0
Confl. Peds. (#/hr)	12	12	12	12	12	12	13	13	13	13	13	13
Heavy Vehicles (%)	8%	5%	9%	7%	9%	3%	3%	4%	6%	2%	5%	5%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4	3	8	5	2	1	6	1	6	1	6
Permitted Phases	4	8	8	2	2	2	2	2	2	2	2	2
Actuated Green, G (s)	26.3	20.4	36.1	27.2	37.9	31.1	41.7	33.0	41.7	33.0	41.7	33.0
Effective Green, g (s)	26.3	20.4	36.1	27.2	37.9	31.1	41.7	33.0	41.7	33.0	41.7	33.0
Actuated g/C Ratio	0.28	0.22	0.39	0.29	0.41	0.33	0.45	0.36	0.45	0.36	0.45	0.36
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	280	676	327	875	426	976	307	1117	307	1117	307	1117
v/s Ratio Prot	0.01	c0.16	c0.08	0.13	0.02	c0.16	c0.03	0.11	c0.03	0.11	c0.03	0.11
v/s Ratio Perm	0.04	0.15	0.15	0.13	0.07	0.13	0.07	0.13	0.07	0.13	0.07	0.13
v/c Ratio	0.20	0.73	0.60	0.43	0.21	0.49	0.36	0.30	0.36	0.30	0.36	0.30
Uniform Delay, d1	24.8	33.7	20.5	26.6	17.2	24.5	15.8	21.6	15.8	21.6	15.8	21.6
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	3.9	2.5	0.3	0.2	1.7	0.6	0.7	0.6	0.7	0.6	0.7
Delay (s)	25.1	37.6	23.0	26.9	17.4	26.3	16.4	22.3	16.4	22.3	16.4	22.3
Level of Service	C	D	C	C	B	C	B	C	B	C	B	C
Approach Delay (s)	36.4	25.6	25.2	20.9	20.9	20.9	20.9	20.9	20.9	20.9	20.9	20.9
Approach LOS	D	C	C	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	27.1											
HCM 2000 Volume to Capacity ratio	0.56											
Actuated Cycle Length (s)	92.9											
Intersection Capacity Utilization	75.4%											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings 104: Garner Rd & Site Driveway

AM TT 2025
01-25-2024

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	55	16	181	28	9	136
Future Volume (vph)	55	16	181	28	9	136
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Flt	0.970		0.982			
Flt Protected	0.963					0.997
Satd. Flow (prot)	1603	0	1685	0	0	1711
Flt Permitted	0.963					0.997
Satd. Flow (perm)	1603	0	1685	0	0	1711
Link Speed (k/h)	50		60			60
Link Distance (m)	155.3		159.5			245.6
Travel Time (s)	11.2		9.6			14.7
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	60	17	197	30	10	148
Shared Lane Traffic (%)	77	0	227	0	0	158
Lane Group Flow (vph)	No	No	No	No	No	No
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.6		3.6			3.6
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	4.8		4.8			4.8
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	100	100	100	100	100	100
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilization	26.8%					
Analysis Period (min)	15					
ICU Level of Service A						

HCM Unsignalized Intersection Capacity Analysis 104: Garner Rd & Site Driveway

AM TT 2025
01-25-2024

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		P			4
Traffic Volume (veh/h)	55	16	181	28	9	136
Future Volume (Veh/h)	55	16	181	28	9	136
Sign Control	Stop		Free			Free
Grade	0%		0%			0%
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	60	17	197	30	10	148
Pedestrians						
Lane Width (m)						
Walking Speed (m/s)						
Percent Blockage						
Right turn flare (veh)						
Median type			None			None
Median storage (veh)						
Upstream signal (m)			159			
pK platoon unblocked						
VC, conflicting volume	380	212			227	
VC1, stage 1 conf vol						
VC2, stage 2 conf vol						
VCu, unblocked vol	380	212			227	
IC, single (s)	6.4	6.2			4.1	
IC, 2 stage (s)						
IF (s)	3.5	3.3			2.2	
p0 queue free %	90	98			99	
dM capacity (veh/h)	617	828			1341	
Direction, Lane #	WB 1	NB 1	SB 1			
Volume Total	77	227	158			
Volume Left	60	0	10			
Volume Right	17	30	0			
cSH	654	1700	1341			
Volume to Capacity	0.12	0.13	0.01			
Queue Length 95th (m)	3.2	0.0	0.2			
Control Delay (s)	11.2	0.0	0.5			
Lane LOS	B		A			
Approach Delay (s)	11.2	0.0	0.5			
Approach LOS	B					
Intersection Summary						
Average Delay			2.1			
Intersection Capacity Utilization			26.8%			A
Analysis Period (min)			15			

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

PM TT 2025
01-26-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	4	178	53	44	171	18	31	140	27	27	181	7	
Traffic Volume (vph)	4	178	53	44	171	18	31	140	27	27	181	7	
Future Volume (vph)	4	178	53	44	171	18	31	140	27	27	181	7	
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Fr	0.971				0.986			0.980			0.995		
Fr Protected	0.999				0.991			0.994			0.994		
Satd. Flow (prot)	0	1698	0	0	1698	0	0	1705	0	0	1721	0	
Fr Permitted	0.999				0.991			0.994			0.994		
Satd. Flow (perm)	0	1698	0	0	1698	0	0	1705	0	0	1721	0	
Link Speed (k/h)	80				80			60			60		
Link Distance (m)	133.8				190.3			256.3			275.8		
Travel Time (s)	6.0				8.6			15.4			16.5		
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58	
Heavy Vehicles (%)	0%	0%	0%	0%	1%	0%	0%	0%	0%	0%	0%	14%	
Adj. Flow (vph)	4	212	59	55	204	30	32	182	38	35	251	12	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	0	275	0	0	289	0	0	252	0	0	298	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right	
Median Width(m)													
Link Offset(m)	0.0				0.0			0.0			0.0		
Crosswalk Width(m)	4.8				4.8			4.8			4.8		
Two way Left Turn Lane													
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	
Turning Speed (k/h)	25	15	15	25	15	25	15	25	15	25	15	15	
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	
Intersection Summary													
Area Type: Other													
Control Type: Unsignalized													
Intersection Capacity Utilization 54.2%													
Analysis Period (min) 15													

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

PM TT 2025
01-26-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations	4	178	53	44	171	18	31	140	27	27	181	7	
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	
Traffic Volume (vph)	4	178	53	44	171	18	31	140	27	27	181	7	
Future Volume (vph)	4	178	53	44	171	18	31	140	27	27	181	7	
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58	
Hourly flow rate (vph)	4	212	59	55	204	30	32	182	38	35	251	12	
Direction, Lane #	EB 1	WB 1	NB 1	SB 1									
Volume Total (vph)	275	289	252	298									
Volume Left (vph)	4	55	32	35									
Volume Right (vph)	59	30	38	12									
Head (s)	-0.13	-0.01	-0.07	0.01									
Departure Headway (s)	6.2	6.3	6.3	6.3									
Degree Utilization, x	0.47	0.50	0.44	0.52									
Capacity (veh/h)	517	515	507	516									
Control Delay (s)	14.7	15.5	14.3	15.9									
Approach Delay (s)	14.7	15.5	14.3	15.9									
Approach LOS	B	C	B	C									
Intersection Summary													
Delay	15.1												
Level of Service	C												
Intersection Capacity Utilization	54.2%												
Analysis Period (min)	15												
	A												

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM TT 2025
01-26-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	35	471	42	51	411	139	20	110	42	111	127	37
Future Volume (vph)	35	471	42	51	411	139	20	110	42	111	127	37
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Ped Bike Factor	1.00	1.00		1.00	0.99							
Flt Protected	0.950			0.950		0.953		0.953		0.950		0.961
Satd. Flow (prot)	1662	3182	0	1662	3116	0	1662	1641	0	1662	1660	0
Flt Permitted	0.305		0.418			0.624				0.638		
Satd. Flow (perm)	533	3182	0	731	3116	0	1092	1641	0	1116	1660	0
Right Turn on Red		Yes			Yes			Yes				Yes
Satd. Flow (RTOR)	25		151		50		36		60		28	
Link Speed (km/h)		50		50		236.3		252.8		159.5		159.5
Link Distance (m)		232.7		236.3			15.2		15.2		9.6	
Travel Time (s)		16.8		17.0								
Confl. Peds. (#/hr)	1		1		1		1		1		1	
Peak Hour Factor	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Heavy Vehicles (%)	0%	3%	0%	1%	1%	0%	1%	3%	0%	0%	5%	5%
Adj. Flow (vph)	52	481	55	64	457	207	25	131	59	126	159	56
Shared Lane Traffic (%)	52	536	0	64	664	0	25	190	0	126	215	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left
Number of Detectors	1	2	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left
Detector Template	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Leading Detector (m)	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4		9.4		9.4		9.4		9.4		9.4	
Detector 2 Size(m)	0.6		0.6		0.6		0.6		0.6		0.6	
Detector 2 Type	Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM TT 2025
01-26-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases												
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase	4	4	4	8	8	8	2	2	2	6	6	6
Switch Phase	10.0	10.0		5.0	5.0		8.0	8.0		8.0	8.0	8.0
Minimum Initial (s)	27.0	27.0		27.0	27.0		36.8	36.8		36.8	36.8	36.8
Minimum Split (s)	37.0	37.0		37.0	37.0		27.8	27.8		27.8	27.8	27.8
Total Split (s)	57.1%	57.1%		57.1%	57.1%		42.9%	42.9%		42.9%	42.9%	42.9%
Total Split (%)	30.0	30.0		30.0	30.0		20.0	20.0		20.0	20.0	20.0
Maximum Green (s)	4.5	4.5		4.5	4.5		4.5	4.5		4.5	4.5	4.5
Yellow Time (s)	2.5	2.5		2.5	2.5		3.3	3.3		3.3	3.3	3.3
All-Red Time (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	0.0
Lost Time Adjust (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	7.8
Total Lost Time (s)												
Lead/Lag												
Lead-Lag Optimize?	2.5	2.5		2.5	2.5		2.5	2.5		2.5	2.5	2.5
Vehicle Extension (s)	None	None		None	None		Max	Max		Max	Max	Max
Recall Mode	8.0	8.0		8.0	8.0		11.0	11.0		11.0	11.0	11.0
Walk Time (s)	12.0	12.0		12.0	12.0		18.0	18.0		18.0	18.0	18.0
Flash Dont Walk (s)	0	0		0	0		0	0		0	0	0
Pedestrian Calls (#/hr)	15.2	15.2		15.2	15.2		29.2	29.2		29.2	29.2	29.2
Act Effct Green (s)	0.26	0.26		0.26	0.26		0.49	0.49		0.49	0.49	0.49
Actuated g/C Ratio	0.38	0.64		0.34	0.73		0.05	0.23		0.23	0.26	0.26
v/c Ratio	26.4	22.2		22.9	20.3		9.8	8.8		11.4	9.6	9.6
Control Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	0.0
Queue Delay	26.4	22.2		22.9	20.3		9.8	8.8		11.4	9.6	9.6
Total Delay	26.4	22.2		22.9	20.3		9.8	8.8		11.4	9.6	9.6
LOS	C	C		C	C		A	A		B	A	A
Approach Delay	22.6			20.5			8.9			10.3		
Approach LOS	C			C			A			B		
Queue Length 50th (m)	4.8	26.9		5.9	27.4		1.3	8.9		7.4	11.0	
Queue Length 95th (m)	9.6	40.6		13.2	43.4		5.0	21.6		19.9	23.7	
Internal Link Dist (m)	208.7			212.3			228.8			135.5		
Turn Bay Length (m)	35.0			30.0			15.0			15.0		
Base Capacity (vph)	271	1633		372	1661		537	826		549	831	
Sanctuary Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.19	0.33		0.17	0.40		0.05	0.23		0.23	0.26	
Intersection Summary												
Area Type:	Other											
Cycle Length:	64.8											
Actuated Cycle Length:	59.2											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.73											
Intersection Signal Delay:	17.9											
Intersection LOS:	B											
Intersection Capacity Utilization	66.6%											
ICU Level of Service	C											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	35	471	42	51	411	139	20	110	42	111	127	37
Future Volume (vph)	35	471	42	51	411	139	20	110	42	111	127	37
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.96
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1662	3181	1661	3117	1662	3117	1662	1642	1662	1662	1660	1660
Flt Permitted	0.31	1.00	0.42	1.00	0.62	1.00	0.62	1.00	0.64	1.00	0.64	1.00
Satd. Flow (perm)	534	3181	731	3117	1091	1642	1091	1642	1116	1660	1116	1660
Peak-Hour factor, PHF	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Adj. Flow (vph)	52	481	55	64	457	207	25	131	59	126	159	56
RTOR Reduction (vph)	0	19	0	0	112	0	0	18	0	0	14	0
Lane Group Flow (vph)	52	517	0	64	552	0	25	172	0	126	201	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	0%	3%	0%	0%	1%	1%	0%	1%	3%	0%	0%	5%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4			8			2			6		
Permitted Phases												
Actuated Green, G (s)	15.2	15.2	15.2	15.2	15.2	15.2	29.1	29.1	29.1	29.1	29.1	29.1
Effective Green, g (s)	15.2	15.2	15.2	15.2	15.2	15.2	29.1	29.1	29.1	29.1	29.1	29.1
Actuated g/C Ratio	0.26	0.26	0.26	0.26	0.26	0.26	0.49	0.49	0.49	0.49	0.49	0.49
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	137	818	188	801	537	808	537	808	549	817	549	817
v/s Ratio Prot	0.16			0.18			0.10			0.12		
v/s Ratio Perm	0.10			0.09			0.02			0.11		
v/c Ratio	0.38	0.63	0.34	0.69	0.05	0.21	0.23	0.25				
Uniform Delay, d1	18.1	19.5	17.9	19.8	7.8	8.5	8.6	8.7				
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	1.3	1.4	0.8	2.3	0.2	0.6	1.0	0.7				
Delay (s)	19.3	20.9	18.7	22.1	8.0	9.1	9.6	9.4				
Level of Service	B	C	B	C	A	A	A	A	A	A	A	A
Approach Delay (s)	20.7		21.8				9.0			9.4		
Approach LOS	C		C				A			A		
Intersection Summary												
HCM 2000 Control Delay		17.7								B		
HCM 2000 Volume to Capacity ratio		0.40										
Actuated Cycle Length (s)		59.1								14.8		
Intersection Capacity Utilization		66.6%								C		
Analysis Period (min)		15										
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM TT 2025
01-26-2024


	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	100	482	75	324	510	79	94	261	264	95	342	58
Traffic Volume (vph)	100	482	75	324	510	79	94	261	264	95	342	58
Future Volume (vph)	100	482	75	324	510	79	94	261	264	95	342	58
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	30.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Per Bike Factor	0.99	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.99	0.99	0.99	0.99
Fit	0.979	0.979	0.977	0.977	0.977	0.977	0.922	0.922	0.922	0.922	0.973	0.973
Fit Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1662	3147	0	1662	3177	0	1662	2955	0	1630	3149	0
Fit Permitted	0.378	0.378	0.378	0.378	0.378	0.378	0.378	0.378	0.378	0.378	0.378	0.378
Satd. Flow (perm)	658	3147	0	359	3177	0	677	2955	0	567	3149	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	15	15	17	17	17	17	215	215	17	17	21	23
Link Speed (km/h)	50	50	50	50	50	50	282.2	282.2	297	297	282.2	282.2
Link Distance (m)	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9	288.9
Travel Time (s)	20.8	20.8	21.0	21.0	21.0	21.0	20.3	20.3	20.3	20.3	16.4	16.4
Confl. Peds. (#/hr)	15	31	31	15	23	15	23	17	17	17	17	23
Peak Hour Factor	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.69
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	141	536	89	390	600	107	147	272	297	110	380	84
Shared Lane Traffic (%)	141	625	0	390	707	0	147	569	0	110	464	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Left	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	15	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM TT 2025
01-26-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	39.9	25.7	54.0	36.8	45.7	31.4	43.7	30.4	43.7	30.4	43.7	30.4
Actuated g/C Ratio	0.37	0.24	0.50	0.34	0.42	0.29	0.41	0.28	0.41	0.28	0.41	0.28
v/c Ratio	0.42	0.82	0.90	0.65	0.90	0.56	0.39	0.56	0.34	0.51	0.39	0.51
Control Delay	19.6	47.9	46.0	32.2	23.8	23.7	23.6	35.4	23.6	35.4	23.6	35.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	19.6	47.9	46.0	32.2	23.8	23.7	23.6	35.4	23.6	35.4	23.6	35.4
LOS	B	D	D	C	C	C	C	C	C	C	C	D
Approach Delay	42.6	37.1	37.1	37.1	37.1	37.1	37.1	37.1	37.1	37.1	37.1	37.1
Approach LOS	D	D	D	D	D	D	D	D	D	D	D	C
Queue Length 50th (m)	16.6	69.4	57.8	68.0	20.0	35.3	14.7	45.0	14.7	45.0	14.7	45.0
Queue Length 95th (m)	21.3	93.3	#88.0	85.5	26.9	62.5	29.2	70.2	29.2	70.2	29.2	70.2
Internal Link Dist (m)	264.9	264.9	264.9	264.9	264.9	264.9	264.9	264.9	264.9	264.9	264.9	264.9
Turn Bay Length (m)	25.0	104.5	486	1182	403	1011	362	902	362	902	362	902
Base Capacity (vph)	557	1045	486	1182	403	1011	362	902	362	902	362	902
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.60	0.80	0.60	0.36	0.56	0.30	0.51	0.30	0.51	0.30	0.51
Intersection Summary	Intersection LOS: C											
Area Type:	Other											
Cycle Length:	122											
Actuated Cycle Length:	107.8											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.90											
Intersection Signal Delay:	34.7											
Intersection Capacity Utilization	90.8%											

Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↰	↰	↰	↰	↰	↰	↰	↰	↰	↰	↰	↰
Traffic Volume (vph)	100	482	75	324	510	79	94	261	264	95	342	58
Future Volume (vph)	100	482	75	324	510	79	94	261	264	95	342	58
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	7.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frpb, ped/bikes	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.98	1.00	0.99	1.00	0.99
Flpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.98	1.00	0.98	1.00	0.92	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1658	3148	1660	3179	1656	2958	1656	2958	1626	3150	1626	3150
Flt Permitted	0.38	1.00	0.21	1.00	0.39	1.00	0.39	1.00	0.33	1.00	0.33	1.00
Satd. Flow (perm)	660	3148	364	3179	684	2958	684	2958	570	3150	570	3150
Peak-Hour factor, PHF	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.69
Adj. Flow (vph)	141	536	89	390	600	107	147	272	297	110	380	84
RTOR Reduction (vph)	0	11	0	0	11	0	0	162	0	0	15	0
Lane Group Flow (vph)	141	614	0	390	696	0	147	417	0	110	449	0
Confl. Peds. (#/hr)	15	31	31	31	31	15	23	17	17	23	23	23
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	0%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4	3	8	5	2	2	5	2	1	6	6
Permitted Phases	4	8	8	8	8	2	2	8	8	6	6	6
Actuated Green, G (s)	35.8	25.7	49.9	36.8	41.5	31.3	39.7	30.4	35.7	30.4	35.7	30.4
Effective Green, g (s)	35.8	25.7	49.9	36.8	41.5	31.3	39.7	30.4	35.7	30.4	35.7	30.4
Actuated g/C Ratio	0.33	0.24	0.46	0.34	0.39	0.29	0.37	0.28	0.37	0.28	0.37	0.28
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	313	752	424	1088	356	861	301	890	301	890	301	890
v/s Ratio Prot	0.04	0.19	c0.18	0.22	c0.04	0.14	0.03	c0.14	0.03	c0.14	0.03	c0.14
v/s Ratio Perm	0.11	0.11	c0.25	0.04	0.12	0.10	0.10	0.10	0.10	0.10	0.10	0.10
v/c Ratio	0.45	0.82	0.92	0.64	0.41	0.48	0.37	0.50	0.37	0.50	0.37	0.50
Uniform Delay, d1	26.1	38.7	23.6	29.8	22.4	31.4	23.2	32.2	23.2	32.2	23.2	32.2
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.8	6.7	24.7	1.1	0.6	1.9	0.6	2.0	0.6	2.0	0.6	2.0
Delay (s)	26.9	45.4	48.3	30.9	23.0	33.4	23.8	34.3	23.8	34.3	23.8	34.3
Level of Service	C	D	D	C	C	C	C	C	C	C	C	C
Approach Delay (s)	42.0	37.1	31.3	32.3	32.3	32.3	32.3	32.3	32.3	32.3	32.3	32.3
Approach LOS	D	D	D	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	36.1											
HCM 2000 Volume to Capacity ratio	0.74											
Actuated Cycle Length (s)	107.5											
Intersection Capacity Utilization	90.8%											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings 104: Garner Rd & Site Driveway

PM TT 2025

01-26-2024

	WBL	WBR	NBT	NBR	SBL	SBT
Lane Group						
Lane Configurations	W		P			4
Traffic Volume (vph)	60	18	212	72	21	215
Future Volume (vph)	60	18	212	72	21	215
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.968		0.966			
Fr Protected	0.963					0.996
Satd. Flow (prot)	1599	0	1657	0	0	1709
Fr Permitted	0.963					0.996
Satd. Flow (perm)	1599	0	1657	0	0	1709
Link Speed (k/h)	50		60			60
Link Distance (m)	155.3		159.5			245.6
Travel Time (s)	11.2		9.6			14.7
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	65	20	230	78	23	234
Shared Lane Traffic (%)						
Lane Group Flow (vph)	85	0	308	0	0	257
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.6		3.6			3.6
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	4.8		4.8			4.8
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	100	100	100	100	100	100
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilization	42.7%					
Analysis Period (min)	15					
	ICU Level of Service A					

HCM Unsignalized Intersection Capacity Analysis 104: Garner Rd & Site Driveway

PM TT 2025

01-26-2024

	WBL	WBR	NBT	NBR	SBL	SBT
Movement						
Lane Configurations	W		P			4
Traffic Volume (veh/h)	60	18	212	72	21	215
Future Volume (Veh/h)	60	18	212	72	21	215
Sign Control	Stop		Free			Free
Grade	0%		0%			0%
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	65	20	230	78	23	234
Pedestrians						
Lane Width (m)						
Walking Speed (m/s)						
Percent Blockage						
Right turn flare (veh)						
Median type			None			None
Median storage (veh)						
Upstream signal (m)			159			
pK platoon unblocked						
VC, conflicting volume	549	269			308	
VC1, stage 1 conf vol						
VC2, stage 2 conf vol						
VCu, unblocked vol	549	269			308	
IC, single (s)	6.4	6.2			4.1	
IC, 2 stage (s)						
IF (s)	3.5	3.3			2.2	
p0 queue free %	87	97			98	
dm capacity (veh/h)	488	770			1253	
Direction, Lane #	WB 1	NB 1	SB 1			
Volume Total	85	308	257			
Volume Left	65	0	23			
Volume Right	20	78	0			
cSH	534	1700	1253			
Volume to Capacity	0.16	0.18	0.02			
Queue Length 95th (m)	4.5	0.0	0.4			
Control Delay (s)	13.0	0.0	0.9			
Lane LOS	B		A			
Approach Delay (s)	13.0	0.0	0.9			
Approach LOS	B					
Intersection Summary						
Average Delay			2.0			
Intersection Capacity Utilization			42.7%			A
Analysis Period (min)			15			

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

AM TT 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	116	15	21	121	33	48	204	47	26	85	5
Traffic Volume (vph)	5	116	15	21	121	33	48	204	47	26	85	5
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Lane Util. Factor	0.977	0.996	0.977	0.971	0.971	0.971	0.975	0.991	0.991	0.991	0.991	0.991
Flt Protected	0	1617	0	0	1653	0	0	1637	0	0	1635	0
Satd. Flow (prot)	0	1617	0	0	1653	0	0	1637	0	0	1635	0
Flt Permitted	0	1617	0	0	1653	0	0	1637	0	0	1635	0
Satd. Flow (perm)	0	1617	0	0	1653	0	0	1637	0	0	1635	0
Link Speed (k/h)	80	80	80	80	80	80	80	80	80	80	80	80
Link Distance (m)	133.8	133.8	133.8	190.3	190.3	190.3	256.3	256.3	256.3	256.3	256.3	256.3
Travel Time (s)	6.0	6.0	6.0	8.6	8.6	8.6	15.4	15.4	15.4	15.4	15.4	15.4
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Heavy Vehicles (%)	25%	2%	10%	0%	1%	7%	0%	2%	11%	0%	7%	0%
Adj. Flow (vph)	15	132	30	22	132	42	70	234	70	33	102	10
Shared Lane Traffic (%)	0	177	0	0	196	0	0	374	0	0	145	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Left	Right	Left	Right	Right
Median Width(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	25	15	25	25	15	25	15	15
Turning Speed (k/h)	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Intersection Summary												
Area Type: Other												
Control Type: Unsignalized												
Intersection Capacity Utilization 47.2%												
Analysis Period (min) 15												

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

AM TT 2030
01-25-2024

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	116	15	21	121	33	48	204	47	26	85	5
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop	Stop
Traffic Volume (vph)	5	116	15	21	121	33	48	204	47	26	85	5
Future Volume (vph)	5	116	15	21	121	33	48	204	47	26	85	5
Peak Hour Factor	0.33	0.88	0.50	0.94	0.92	0.78	0.69	0.87	0.67	0.79	0.83	0.50
Hourly flow rate (vph)	15	132	30	22	132	42	70	234	70	33	102	10
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	177	196	374	145								
Volume Left (vph)	15	22	70	33								
Volume Right (vph)	30	42	70	10								
Head (s)	0.01	-0.07	-0.02	0.09								
Departure Headway (s)	5.7	5.6	5.2	5.7								
Degree Utilization, x	0.28	0.30	0.54	0.23								
Capacity (veh/h)	588	581	651	570								
Control Delay (s)	10.9	11.0	14.2	10.4								
Approach Delay (s)	10.9	11.0	14.2	10.4								
Approach LOS	B	B	B	B								
Intersection Summary												
Delay	12.2											
Level of Service	B											
Intersection Capacity Utilization	47.2%											
Analysis Period (min)	15											
ICU Level of Service	A											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM TT 2030
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	26	383	22	21	315	74	27	127	47	106	59	39
Future Volume (vph)	26	383	22	21	315	74	27	127	47	106	59	39
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00											
Frt Protected	0.950			0.950		0.968		0.950		0.950		0.934
Satd. Flow (prot)	1471	3197	0	1662	3039	0	1662	1609	0	1564	1616	0
Flt Permitted	0.496			0.499		0.674		0.674		0.632		0
Satd. Flow (perm)	768	3197	0	872	3039	0	1180	1609	0	1034	1616	0
Right Turn on Red		Yes			Yes		Yes		Yes		Yes	
Satd. Flow (RTOR)	14		72		72		40		40		57	
Link Speed (km/h)	50		50		50		60		60		60	
Link Distance (m)	232.7		236.3		236.3		252.8		252.8		159.5	
Travel Time (s)	16.8		17.0		17.0		15.2		15.2		9.6	
Confl. Peds. (#/hr)		1		1								
Peak Hour Factor	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Adj. Flow (vph)	39	407	28	51	346	95	38	134	66	128	72	57
Shared Lane Traffic (%)												
Lane Group Flow (vph)	39	435	0	51	441	0	38	200	0	128	129	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)		3.6		3.6		3.6		3.6		3.6		3.6
Link Offset(m)		0.0		0.0		0.0		0.0		0.0		0.0
Crosswalk Width(m)		4.8		4.8		4.8		4.8		4.8		4.8
Two way Left Turn Lane												
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	25	15	25	15	25	15	25	15	25	15	25	15
Number of Detectors	1	2		1	2		1	2		1	2	
Detector Template	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Leading Detector (m)	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)		9.4		9.4		9.4		9.4		9.4		9.4
Detector 2 Size(m)		0.6		0.6		0.6		0.6		0.6		0.6
Detector 2 Type		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex
Detector 2 Channel												
Detector 2 Extend (s)		0.0		0.0		0.0		0.0		0.0		0.0

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

AM TT 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases												
Permitted Phases	4	4		8	8		2	2		6	6	
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		5.0	5.0		8.0	8.0		8.0	8.0	
Minimum Split (s)	27.0	27.0		27.0	27.0		36.8	36.8		36.8	36.8	
Total Split (s)	37.0	37.0		37.0	37.0		27.8	27.8		27.8	27.8	
Total Split (%)	57.1%	57.1%		57.1%	57.1%		42.9%	42.9%		42.9%	42.9%	
Maximum Green (s)	30.0	30.0		30.0	30.0		20.0	20.0		20.0	20.0	
Yellow Time (s)	4.5	4.5		4.5	4.5		4.5	4.5		4.5	4.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		3.3	3.3		3.3	3.3	
Lost Time Adjust (s)	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Lost Time (s)	7.0	7.0		7.0	7.0		7.8	7.8		7.8	7.8	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	2.5	2.5		2.5	2.5		2.5	2.5		2.5	2.5	
Recall Mode	None	None		None	None		Max	Max		Max	Max	
Walk Time (s)	8.0	8.0		8.0	8.0		11.0	11.0		11.0	11.0	
Flash Dont Walk (s)	12.0	12.0		12.0	12.0		18.0	18.0		18.0	18.0	
Pedestrian Calls (#/hr)	0	0		0	0		0	0		0	0	
Act Effct Green (s)	12.4	12.4		12.4	12.4		29.1	29.1		29.1	29.1	
Actuated g/C Ratio	0.22	0.22		0.22	0.22		0.52	0.52		0.52	0.52	
v/c Ratio	0.23	0.61		0.27	0.61		0.06	0.24		0.24	0.15	
Control Delay	21.5	23.0		21.8	20.2		8.0	7.3		9.7	5.4	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	21.5	23.0		21.8	20.2		8.0	7.3		9.7	5.4	
LOS	C	C		C	C		A	A		A	A	
Approach Delay	22.8			20.3			7.4			7.6		
Approach LOS	C			C			A			A		
Queue Length 50th (m)	3.5	21.4		4.6	18.5		1.8	8.2		6.8	3.5	
Queue Length 95th (m)	7.5	33.8		5.2	31.0		5.0	20.6		16.1	10.4	
Internal Link Dist (m)		208.7			212.3			228.8			135.5	
Turn Bay Length (m)	35.0			30.0			15.0			15.0		
Base Capacity (vph)	410	1713		465	1656		609	849		533	861	
Sanctuary Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.10	0.25		0.11	0.27		0.06	0.24		0.24	0.15	
Intersection Summary	Other											
Area Type:												
Cycle Length:	64.8											
Actuated Cycle Length:	56.3											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.61											
Intersection Signal Delay:	16.8											
Intersection LOS:	B											
Intersection Capacity Utilization	59.3%											
ICU Level of Service	B											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	26	383	22	21	315	74	27	127	47	106	59	39
Future Volume (vph)	26	383	22	21	315	74	27	127	47	106	59	39
Ideal Flow (vphpb)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.99	1.00	0.97	1.00	0.97	1.00	0.95	1.00	0.95	1.00	0.93
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1471	3199	1661	3038	1661	3038	1662	1610	1554	1616	1554	1616
Flt Permitted	0.50	1.00	0.50	1.00	0.50	1.00	0.67	1.00	0.63	1.00	0.63	1.00
Satd. Flow (perm)	769	3199	873	3038	769	3038	1180	1610	1034	1616	1034	1616
Peak-Hour factor, PHF	0.67	0.94	0.79	0.41	0.91	0.78	0.72	0.95	0.71	0.83	0.82	0.69
Adj. Flow (vph)	39	407	28	51	346	95	38	134	66	128	72	57
RTOR Reduction (vph)	0	11	0	0	56	0	0	19	0	0	0	28
Lane Group Flow (vph)	39	424	0	51	385	0	38	181	0	128	101	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	13%	3%	0%	0%	7%	2%	0%	1%	8%	7%	2%	0%
Turn Type	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4				8							
Permitted Phases							2			6		
Actuated Green, G (s)	12.4	12.4	12.4	12.4	12.4	12.4	29.0	29.0	29.0	29.0	29.0	29.0
Effective Green, g (s)	12.4	12.4	12.4	12.4	12.4	12.4	29.0	29.0	29.0	29.0	29.0	29.0
Actuated g/C Ratio	0.22	0.22	0.22	0.22	0.22	0.22	0.52	0.52	0.52	0.52	0.52	0.52
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	169	705	192	670	608	830	533	833	533	833	533	833
v/s Ratio Prot												
v/s Ratio Perm	0.05		0.06		0.03		0.11			0.12		0.06
v/c Ratio	0.23	0.60	0.27	0.57	0.06	0.22	0.24	0.12		0.12		0.12
Uniform Delay, d1	18.0	19.7	18.1	19.5	6.8	7.4	7.5	7.0		7.5		7.0
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.5	1.2	0.5	1.0	0.2	0.6	1.1	0.3		1.1		0.3
Delay (s)	18.5	20.9	18.7	20.5	7.0	8.0	8.6	7.3		8.6		7.3
Level of Service	B	C	B	C	A	A	A	A	A	A	A	A
Approach Delay (s)		20.7		20.3		7.9				7.9		
Approach LOS		C		C		A				A		
Intersection Summary												
HCM 2000 Control Delay		16.2										B
HCM 2000 Volume to Capacity ratio		0.35										
Actuated Cycle Length (s)		56.2								14.8		
Intersection Capacity Utilization		59.3%										B
Analysis Period (min)		15										
c Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM TT 2030
01-25-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	55	432	64	172	292	52	89	248	357	94	268	50
Traffic Volume (vph)	55	432	64	172	292	52	89	248	357	94	268	50
Future Volume (vph)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Ideal Flow (vphpl)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Length (m)	7.5	0	1	7.5	0	1	7.5	0	1	7.5	0	0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Lane Util. Factor	0.99	1.00	0.99	0.99	0.99	0.99	0.99	1.00	0.95	1.00	0.95	0.95
Ped Bike Factor	0.980	0.980	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971	0.971
Flt Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1539	3077	0	1525	2988	0	1614	2917	0	1568	3144	0
Flt Permitted	0.498	0.264	0.264	0.264	0.264	0.264	0.264	0.264	0.264	0.264	0.264	0.264
Satd. Flow (perm)	799	3077	0	421	2988	0	886	2917	0	368	3144	0
Right Turn on Red	14	50	24	50	24	50	305	50	24	50	19	50
Satd. Flow (RTOR)	288.9	291.8	282.2	291.8	282.2	291.8	282.2	291.8	282.2	291.8	282.2	291.8
Link Speed (km/h)	20.8	20.8	21.0	20.8	21.0	20.8	20.3	20.3	20.8	21.0	20.8	20.3
Travel Time (s)	12	12	12	12	12	12	13	13	12	12	13	13
Confl. Peds. (#/hr)	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Peak Hour Factor	8%	5%	9%	9%	7%	9%	3%	3%	4%	6%	2%	5%
Heavy Vehicles (%)	61	480	74	215	352	85	98	292	452	122	315	65
Adj. Flow (vph)	61	554	0	215	437	0	98	744	0	122	380	0
Shared Lane Traffic (%)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size(m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

AM TT 2030
01-25-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	3	8	3	8	5	2	1	6	1	6
Permitted Phases	4	4	8	8	2	2	6	6	6	6	6	6
Detector Phase	7	4	3	8	3	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	11.0	11.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	33.3	21.7	42.5	30.0	43.1	30.4	44.9	33.2	44.9	33.2	44.9	33.2
Actuated g/C Ratio	0.35	0.23	0.45	0.31	0.45	0.32	0.47	0.35	0.47	0.35	0.47	0.35
v/c Ratio	0.18	0.78	0.62	0.46	0.21	0.65	0.42	0.34	0.42	0.34	0.42	0.34
Control Delay	16.8	42.4	25.1	26.8	16.8	20.5	20.3	25.9	20.3	25.9	20.3	25.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	16.8	42.4	25.1	26.8	16.8	20.5	20.3	25.9	20.3	25.9	20.3	25.9
LOS	B	D	C	C	B	C	C	C	C	C	C	C
Approach Delay	39.9	26.2	26.2	20.1	26.2	20.1	24.6	24.6	24.6	24.6	24.6	24.6
Approach LOS	D	D	C	C	D	C	C	C	C	C	C	C
Queue Length 50th (m)	6.6	51.5	25.8	34.2	9.8	37.6	12.5	27.6	12.5	27.6	12.5	27.6
Queue Length 95th (m)	14.3	77.8	37.7	46.4	24.1	64.8	24.5	47.6	24.5	47.6	24.5	47.6
Internal Link Dist (m)	264.9	264.9	267.8	267.8	264.9	264.9	258.2	258.2	258.2	258.2	258.2	258.2
Turn Bay Length (m)	25.0	1154	481	1154	20.0	518	1138	331	1106	331	1106	331
Base Capacity (vph)	553	1154	481	1154	518	1138	331	1106	331	1106	331	1106
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.11	0.48	0.45	0.38	0.19	0.65	0.37	0.34	0.37	0.34	0.37	0.34
Intersection Summary	Other											
Area Type:	Cycle Length: 122											
Actual Cycle Length:	95.3											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.78											
Intersection Signal Delay:	27.1											
Intersection Capacity Utilization	77.6%											
Intersection LOS:	C											
ICU Level of Service D												

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
103: Kalar Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↰	↰	↰	↰	↰	↰	↰	↰	↰	↰	↰	↰
Traffic Volume (vph)	55	432	64	172	292	52	89	248	357	94	268	50
Future Volume (vph)	55	432	64	172	292	52	89	248	357	94	268	50
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frb. ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.97	1.00	0.97	1.00	0.91	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1533	3078	1524	2990	1608	2917	1568	3147	1568	3147	1568	3147
Flt Permitted	0.50	1.00	0.26	1.00	0.53	1.00	0.53	1.00	0.22	1.00	0.22	1.00
Satd. Flow (perm)	804	3078	423	2990	891	2917	368	3147	368	3147	368	3147
Peak-Hour factor, PHF	0.90	0.90	0.86	0.80	0.83	0.61	0.91	0.85	0.79	0.77	0.85	0.77
Adj. Flow (vph)	61	480	74	215	352	85	98	292	452	122	315	65
RTOR Reduction (vph)	0	11	0	0	17	0	0	206	0	0	12	0
Lane Group Flow (vph)	61	543	0	215	420	0	98	538	0	122	368	0
Confl. Peds. (#/hr)	12	12	12	12	12	12	13	13	13	13	13	13
Heavy Vehicles (%)	8%	5%	9%	7%	9%	3%	3%	4%	6%	2%	5%	5%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4	3	8	5	2	1	6	1	6	1	6
Permitted Phases	4	8	8	8	2	2	2	2	2	2	2	2
Actuated Green, G (s)	28.5	22.4	39.1	30.0	38.4	31.2	42.4	33.2	42.4	33.2	42.4	33.2
Effective Green, g (s)	28.5	22.4	39.1	30.0	38.4	31.2	42.4	33.2	42.4	33.2	42.4	33.2
Actuated g/C Ratio	0.30	0.23	0.41	0.31	0.40	0.32	0.44	0.34	0.44	0.34	0.44	0.34
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	283	714	327	929	408	943	276	1082	276	1082	276	1082
v/s Ratio Prot	0.01	c0.18	c0.09	0.14	0.02	c0.18	c0.04	0.12	c0.04	0.12	c0.04	0.12
v/s Ratio Perm	0.05	0.17	0.17	0.17	0.08	0.08	0.15	0.15	0.08	0.08	0.15	0.15
v/c Ratio	0.22	0.76	0.66	0.45	0.24	0.57	0.44	0.34	0.44	0.34	0.44	0.34
Uniform Delay, d1	25.0	34.6	20.7	26.7	18.6	27.1	17.6	23.5	17.6	23.5	17.6	23.5
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	0.3	4.6	4.3	0.3	0.2	2.5	0.9	0.9	0.9	0.9	0.9	0.9
Delay (s)	25.3	39.2	25.0	26.9	18.9	29.6	18.5	24.4	18.5	24.4	18.5	24.4
Level of Service	C	D	C	C	B	C	B	C	B	C	B	C
Approach Delay (s)	37.8	26.3	26.3	26.3	26.3	26.3	22.9	22.9	22.9	22.9	22.9	22.9
Approach LOS	D	D	C	C	C	C	C	C	C	C	C	C
Intersection Summary												
HCM 2000 Control Delay	29.0											
HCM 2000 Level of Service	C											
HCM 2000 Volume to Capacity ratio	0.63											
Actuated Cycle Length (s)	96.5											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	77.6%											
ICU Level of Service	D											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
104: Garner Rd & Site Driveway

AM TT 2030
01-25-2024

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↔		↔			↔
Traffic Volume (vph)	55	16	199	28	9	150
Future Volume (vph)	55	16	199	28	9	150
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.970		0.984			
Fr Protected	0.963					0.997
Satd. Flow (prot)	1603	0	1688	0	0	1711
Fr Permitted	0.963					0.997
Satd. Flow (perm)	1603	0	1688	0	0	1711
Link Speed (k/h)	50		60			60
Link Distance (m)	155.3		159.5			245.6
Travel Time (s)	11.2		9.6			14.7
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	60	17	216	30	10	163
Shared Lane Traffic (%)						
Lane Group Flow (vph)	77	0	246	0	0	173
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.6		3.6			3.6
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	4.8		4.8			4.8
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	100	100	100	100	100	100
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilization	27.6%					
Analysis Period (min)	15					
ICU Level of Service A						

HCM Unsignalized Intersection Capacity Analysis
104: Garner Rd & Site Driveway

AM TT 2030
01-25-2024

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (Veh/h)	55	16	199	28	9	150
Future Volume (Veh/h)	55	16	199	28	9	150
Sign Control	Stop		Free			Free
Grade	0%		0%			0%
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	60	17	216	30	10	163
Pedestrians						
Lane Width (m)						
Walking Speed (m/s)						
Percent Blockage						
Right turn flare (veh)						
Median type			None			None
Median storage (veh)						
Upstream signal (m)			159			
pX: platoon unblocked						
VC: conflicting volume	414	231			246	
VC1: stage 1 conf vol						
VC2: stage 2 conf vol						
VCu: unblocked vol	414	231			246	
IC: single (s)	6.4	6.2			4.1	
IC: 2 stage (s)						
IF (s)	3.5	3.3			2.2	
p0 queue free %	90	98			99	
dM capacity (veh/h)	590	808			1320	
Direction_Lane #	WB 1	NB 1	SB 1			
Volume Total	77	246	173			
Volume Left	60	0	10			
Volume Right	17	30	0			
cSH	628	1700	1320			
Volume to Capacity	0.12	0.14	0.01			
Queue Length 95th (m)	3.3	0.0	0.2			
Control Delay (s)	11.5	0.0	0.5			
Lane LOS	B		A			
Approach Delay (s)	11.5	0.0	0.5			
Approach LOS	B					
Intersection Summary						
Average Delay	2.0					
Intersection Capacity Utilization	27.6%					
Analysis Period (min)	15					
				ICU Level of Service		
				A		

Lanes, Volumes, Timings
101: Garner Rd & Beaverdams Rd

PM TT 2030
01-26-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	197	58	48	189	20	33	154	29	29	199	8
Traffic Volume (vph)	5	197	58	48	189	20	33	154	29	29	199	8
Future Volume (vph)	5	197	58	48	189	20	33	154	29	29	199	8
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Fr	0.972			0.986			0.980			0.994		
Fr Protected	0.999			0.991			0.994			0.994		
Satd. Flow (prot)	0	1699	0	0	1698	0	0	1705	0	0	1719	0
Fr Permitted	0.999			0.991			0.994			0.994		
Satd. Flow (perm)	0	1699	0	0	1698	0	0	1705	0	0	1719	0
Link Speed (k/h)	80			80			60			60		
Link Distance (m)	133.8			190.3			256.3			275.8		
Travel Time (s)	6.0			8.6			15.4			16.5		
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Heavy Vehicles (%)	0%	0%	0%	0%	1%	0%	0%	0%	0%	0%	0%	14%
Adj. Flow (vph)	5	235	64	60	225	33	34	200	41	37	276	14
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	304	0	0	318	0	0	275	0	0	327	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	0.0			0.0			0.0			0.0		
Link Offset(m)	0.0			0.0			0.0			0.0		
Crosswalk Width(m)	4.8			4.8			4.8			4.8		
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25			15			25			25		
Turning Speed (k/h)	Stop			Stop			Stop			Stop		
Sign Control	Stop			Stop			Stop			Stop		
Intersection Summary												
Area Type: Other												
Control Type: Unsignalized												
Intersection Capacity Utilization 58.5%												
Analysis Period (min) 15												

HCM Unsignalized Intersection Capacity Analysis
101: Garner Rd & Beaverdams Rd

PM TT 2030
01-26-2024

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	5	197	58	48	189	20	33	154	29	29	199	8
Sign Control	Stop			Stop			Stop			Stop		
Traffic Volume (vph)	5	197	58	48	189	20	33	154	29	29	199	8
Future Volume (vph)	5	197	58	48	189	20	33	154	29	29	199	8
Peak Hour Factor	1.00	0.84	0.90	0.80	0.84	0.61	0.96	0.77	0.71	0.78	0.72	0.58
Hourly flow rate (vph)	5	235	64	60	225	33	34	200	41	37	276	14
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total (vph)	304	318	275	327								
Volume Left (vph)	5	60	34	37								
Volume Right (vph)	64	33	41	14								
Head (s)	-0.12	-0.01	-0.06	0.01								
Departure Headway (s)	6.8	6.8	6.9	6.8								
Degree Utilization, x	0.57	0.60	0.53	0.62								
Capacity (veh/h)	481	483	480	484								
Control Delay (s)	18.3	19.6	17.3	20.3								
Approach Delay (s)	18.3	19.6	17.3	20.3								
Approach LOS	C	C	C	C								
Intersection Summary												
Delay	19.0											
Level of Service	C											
Intersection Capacity Utilization	58.5%											
Analysis Period (min)	15											
ICU Level of Service	B											

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM TT 2030
01-26-2024


Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔	↔
Traffic Volume (vph)	36	520	47	56	453	148	22	121	47	118	140	40
Future Volume (vph)	36	520	47	56	453	148	22	121	47	118	140	40
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	35.0		0.0	30.0		0.0	15.0		0.0	15.0		0.0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (m)	7.5		7.5		7.5		7.5		7.5		7.5	
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00
Per Bike Factor	1.00	1.00		1.00	0.99							
Flt Protected	0.950			0.950		0.954		0.953		0.950		0.961
Satd. Flow (prot)	1662	3182	0	1662	3120	0	1662	1641	0	1662	1660	0
Flt Permitted	0.270		0.373				0.612			0.626		
Satd. Flow (perm)	472	3182	0	652	3120	0	1071	1641	0	1096	1660	0
Right Turn on Red		Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)	25		143		50		37		60		28	
Link Speed (km/h)	50		236.3		252.8		159.5		15.2		9.6	
Link Distance (m)	16.8											
Travel Time (s)	1		1		1		1		1		1	
Confl. Peds. (#/hr)	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Peak Hour Factor	0%	3%	0%	0%	1%	1%	0%	3%	0%	0%	5%	61
Heavy Vehicles (%)	54	531	61	70	503	221	28	144	66	134	175	61
Adj. Flow (vph)	54	531	61	70	503	221	28	144	66	134	175	61
Shared Lane Traffic (%)	54	592	0	70	724	0	28	210	0	134	236	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Left	Right	Right
Median Width(m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width(m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	25	15	25	15	25	15	25	15	25	15
Turning Speed (k/h)	1	2	1	2	1	2	1	2	1	2	1	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size(m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel												
Detector 1 Extend(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue(s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position(m)	9.4		9.4		9.4		9.4		9.4		9.4	
Detector 2 Size(m)	0.6		0.6		0.6		0.6		0.6		0.6	
Detector 2 Type	Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex		Ch+Ex	
Detector 2 Channel												
Detector 2 Extend (s)	0.0		0.0		0.0		0.0		0.0		0.0	

Lanes, Volumes, Timings
102: Garner Rd & Lundy's Ln

PM TT 2030
01-26-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	Perm	NA	4	Perm	NA	8	Perm	NA	2	Perm	NA	6
Protected Phases	4	4	4	8	8	8	2	2	2	6	6	6
Permitted Phases	4	4	4	8	8	8	2	2	2	6	6	6
Detector Phase	10.0	10.0	5.0	5.0	5.0	8.0	8.0	8.0	8.0	8.0	8.0	8.0
Minimum Initial (s)	27.0	27.0	27.0	27.0	27.0	36.8	36.8	36.8	36.8	36.8	36.8	36.8
Minimum Split (s)	37.0	37.0	37.0	37.0	37.0	27.8	27.8	27.8	27.8	27.8	27.8	27.8
Total Split (s)	57.1%	57.1%	57.1%	57.1%	57.1%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%	42.9%
Total Split (%)	30.0	30.0	30.0	30.0	30.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0
Maximum Green (s)	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
Yellow Time (s)	2.5	2.5	2.5	2.5	2.5	3.3	3.3	3.3	3.3	3.3	3.3	3.3
All-Red Time (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Lost Time Adjust (s)	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8	7.8
Total Lost Time (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lead/Lag	None	None	None	None	None	None	None	None	None	None	None	None
Lead-Lag Optimize?	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Vehicle Extension (s)	None	None	None	None	None	None	None	None	None	None	None	None
Recall Mode	8.0	8.0	8.0	8.0	8.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Walk Time (s)	12.0	12.0	12.0	12.0	12.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0
Flash Dont Walk (s)	0	0	0	0	0	0	0	0	0	0	0	0
Pedestrian Calls (#/hr)	17.0	17.0	17.0	17.0	17.0	29.2	29.2	29.2	29.2	29.2	29.2	29.2
Act Effct Green (s)	0.28	0.28	0.28	0.28	0.28	0.48	0.48	0.48	0.48	0.48	0.48	0.48
Actuated g/C Ratio	0.41	0.65	0.39	0.75	0.05	0.05	0.26	0.26	0.26	0.26	0.26	0.26
v/c Ratio	27.7	22.0	24.0	20.8	11.0	10.0	12.8	10.9	10.0	0.0	0.0	0.0
Control Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Queue Delay	27.7	22.0	24.0	20.8	11.0	10.0	12.8	10.9	10.0	0.0	0.0	0.0
Total Delay	27.7	22.0	24.0	20.8	11.0	10.0	12.8	10.9	10.0	0.0	0.0	0.0
LOS	C	C	C	C	C	B	B	B	B	B	B	B
Approach Delay	22.4	21.1	21.1	21.1	21.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1
Approach LOS	C	C	C	C	C	B	B	B	B	B	B	B
Queue Length 50th (m)	5.1	30.6	6.6	32.1	1.7	11.2	8.8	13.8	8.8	13.8	8.8	13.8
Queue Length 95th (m)	9.8	44.9	14.3	49.0	5.8	26.0	23.1	28.5	23.1	28.5	23.1	28.5
Internal Link Dist (m)	208.7	212.3	212.3	212.3	212.3	228.8	228.8	228.8	228.8	228.8	228.8	228.8
Turn Bay Length (m)	35.0	322	1614	511	803	523	807	523	807	523	807	523
Base Capacity (vph)	233	1585	322	1614	511	803	523	807	523	807	523	807
Survation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.23	0.37	0.22	0.45	0.05	0.26	0.26	0.26	0.26	0.26	0.26	0.26
Intersection Summary	Intersection LOS: B ICU Level of Service C											
Area Type:	Other											
Cycle Length:	64.8											
Actuated Cycle Length:	61.1											
Natural Cycle:	65											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.75											
Intersection Signal Delay:	18.5											
Intersection Capacity Utilization	69.1%											

Analysis Period (min) 15



HCM Signalized Intersection Capacity Analysis
102: Garner Rd & Lundy's Ln

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	36	520	47	56	453	148	22	121	47	118	140	40
Future Volume (vph)	36	520	47	56	453	148	22	121	47	118	140	40
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Flt	1.00	0.98	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.96
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1662	3181	1661	3121	1662	3121	1662	1641	1662	1662	1661	1661
Flt Permitted	0.27	1.00	0.37	1.00	0.61	1.00	0.61	1.00	0.63	1.00	0.63	1.00
Satd. Flow (perm)	472	3181	652	3121	1071	1641	1071	1641	1096	1661	1096	1661
Peak-hour factor, PHF	0.67	0.98	0.77	0.80	0.90	0.67	0.79	0.84	0.71	0.88	0.80	0.66
Adj. Flow (vph)	54	531	61	70	503	221	28	144	66	134	175	61
RTOR Reduction (vph)	0	18	0	0	103	0	0	19	0	0	15	0
Lane Group Flow (vph)	54	574	0	70	621	0	28	191	0	134	221	0
Confl. Peds. (#/hr)	1	1	1	1	1	1	1	1	1	1	1	1
Heavy Vehicles (%)	0%	3%	0%	0%	1%	1%	0%	1%	3%	0%	0%	5%
Turn Type	Perm	NA	Perm	Perm	NA	Perm	Perm	NA	Perm	NA	Perm	NA
Protected Phases	4			8			2			6		6
Permitted Phases		4			8			2			6	
Actuated Green, G (s)	17.0	17.0	17.0	17.0	17.0	17.0	29.2	29.2	29.2	29.2	29.2	29.2
Effective Green, g (s)	17.0	17.0	17.0	17.0	17.0	17.0	29.2	29.2	29.2	29.2	29.2	29.2
Actuated g/C Ratio	0.28	0.28	0.28	0.28	0.28	0.28	0.48	0.48	0.48	0.48	0.48	0.48
Clearance Time (s)	7.0	7.0	7.0	7.0	7.0	7.0	7.8	7.8	7.8	7.8	7.8	7.8
Vehicle Extension (s)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Lane Grp Cap (vph)	131	886	181	869	512	785	512	785	524	795	524	795
v/s Ratio Prot	0.18			0.20			0.12			0.13		
v/s Ratio Perm	0.11		0.11		0.03			0.12		0.12		
v/c Ratio	0.41	0.65	0.39	0.71	0.05	0.24	0.05	0.24	0.26	0.28	0.26	0.28
Uniform Delay, d1	17.9	19.4	17.8	19.8	8.5	9.4	8.5	9.4	9.4	9.6	9.4	9.6
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	1.5	1.5	1.0	2.6	0.2	0.7	1.2	0.7	1.2	0.9	1.2	0.9
Delay (s)	19.5	20.8	18.8	22.4	8.7	10.1	8.7	10.1	10.6	10.4	10.6	10.4
Level of Service	B	C	B	C	A	B	A	B	B	B	B	B
Approach Delay (s)	20.7		22.1				9.9		10.5			
Approach LOS	C		C				A		B			
Intersection Summary												
HCM 2000 Control Delay	18.2		HCM 2000 Level of Service		B							
HCM 2000 Volume to Capacity ratio	0.44											
Actuated Cycle Length (s)	61.0		Sum of lost time (s)		14.8							
Intersection Capacity Utilization	69.1%		ICU Level of Service		C							
Analysis Period (min)	15											
Critical Lane Group												

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln

PM TT 2030
01-26-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	4	4	1	4	4	1	4	4	1	4	4
Traffic Volume (vph)	110	528	83	357	558	87	104	288	292	105	377	64
Future Volume (vph)	110	528	83	357	558	87	104	288	292	105	377	64
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Storage Length (m)	25.0	0.0	30.0	0.0	30.0	0.0	20.0	0.0	30.0	0.0	30.0	0.0
Storage Lanes	1	0	1	0	1	0	1	0	1	0	1	0
Taper Length (m)	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0	7.5	0.0
Lane Util. Factor	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95	1.00	0.95	0.95
Ped Bike Factor	1.00	0.99	0.99	0.99	0.99	0.99	0.99	0.98	0.99	0.99	0.99	0.99
Frt	0.978	0.978	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.977	0.973
Flt Protected	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950	0.950
Satd. Flow (prot)	1662	3144	0	1662	3177	0	1662	2955	0	1630	3149	0
Flt Permitted	0.347	0.177	0.177	0.347	0.177	0.177	0.347	0.177	0.177	0.347	0.177	0.177
Satd. Flow (perm)	604	3144	0	306	3177	0	579	2955	0	455	3149	0
Right Turn on Red	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Satd. Flow (RTOR)	16	17	17	16	17	17	16	17	17	16	17	17
Link Speed (km/h)	50	50	50	50	50	50	50	50	50	50	50	50
Link Distance (m)	288.9	291.8	291.8	288.9	291.8	291.8	288.9	291.8	291.8	288.9	291.8	291.8
Travel Time (s)	20.8	21.0	21.0	20.8	21.0	21.0	20.8	21.0	21.0	20.8	21.0	21.0
Confl. Peds. (#/hr)	15	31	31	15	23	23	15	23	17	17	23	23
Peak Hour Factor	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.69
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	155	587	99	430	656	118	163	300	328	122	419	93
Shared Lane Traffic (%)	155	686	0	430	774	0	163	628	0	122	512	0
Lane Group Flow (vph)	No	No	No	No	No	No	No	No	No	No	No	No
Enter Blocked Intersection	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Lane Alignment	Left	Left	Right	Left	Right	Left	Left	Right	Left	Right	Left	Right
Median Width (m)	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6
Link Offset (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Crosswalk Width (m)	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
Two way Left Turn Lane	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11	1.11
Headway Factor	25	15	15	25	15	15	25	15	15	25	15	15
Turning Speed (km/h)	1	2	2	1	2	2	1	2	1	2	2	2
Number of Detectors	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru	Left	Thru
Detector Template	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0	2.0	10.0
Leading Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Trailing Detector (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Position (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Size (m)	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6	2.0	0.6
Detector 1 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 1 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Position (m)	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4	9.4
Detector 2 Size (m)	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Detector 2 Type	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex	Ch+Ex
Detector 2 Channel	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Detector 2 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

PM TT 2030 (2205:71) 8885 Lundy's Lane 1:45 pm 11-21-2022 PM - Total 2030
Paradigm Transportation Solutions Limited

Synchro 11 Report
Page 7

Lanes, Volumes, Timings
103: Kalar Rd & Lundy's Ln


PM TT 2030
01-26-2024

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Turn Type	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA
Protected Phases	7	4	4	3	8	8	5	2	1	6	1	6
Permitted Phases	4	4	4	8	8	8	2	2	6	6	6	6
Detector Phase	7	4	4	3	8	8	5	2	1	6	1	6
Switch Phase	6.0	10.0	6.0	10.0	6.0	10.0	6.0	8.0	6.0	8.0	6.0	8.0
Minimum Initial (s)	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0	9.0	37.0
Minimum Split (s)	28.0	42.0	28.0	42.0	28.0	42.0	15.0	37.0	15.0	37.0	15.0	37.0
Total Split (s)	23.0%	34.4%	23.0%	34.4%	23.0%	34.4%	12.3%	30.3%	12.3%	30.3%	12.3%	30.3%
Maximum Green (s)	25.0	35.0	25.0	35.0	25.0	35.0	12.0	30.0	12.0	30.0	12.0	30.0
Yellow Time (s)	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1	3.0	4.1
All-Red Time (s)	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9	0.0	2.9
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lead/Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag	Lead	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Recall Mode	None	None	None	None	None	None	None	None	None	None	None	None
Walk Time (s)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Flash Dont Walk (s)	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0
Pedestrian Calls (#/hr)	0	0	0	0	0	0	0	0	0	0	0	0
Act Effct Green (s)	43.5	28.6	43.5	28.6	43.5	28.6	45.9	31.1	44.1	30.2	44.1	30.2
Actuated g/C Ratio	0.38	0.25	0.37	0.25	0.37	0.25	0.40	0.27	0.39	0.27	0.39	0.27
v/c Ratio	0.47	0.85	0.96	0.66	0.96	0.66	0.49	0.65	0.44	0.60	0.44	0.60
Control Delay	20.3	51.0	61.5	32.8	27.9	28.4	27.9	28.4	27.4	39.8	27.4	39.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	20.3	51.0	61.5	32.8	27.9	28.4	27.9	28.4	27.4	39.8	27.4	39.8
LOS	C	D	E	C	C	C	C	C	C	C	C	D
Approach Delay	45.4	43.0	43.0	43.0	43.0	43.0	28.3	28.3	37.4	37.4	37.4	37.4
Approach LOS	D	D	D	D	D	D	C	C	D	D	D	D
Queue Length 50th (m)	18.6	81.0	76.7	78.0	24.7	46.6	18.0	54.8	18.0	54.8	18.0	54.8
Queue Length 95th (m)	23.2	104.3	#122.6	98.4	29.5	73.1	32.0	78.4	32.0	78.4	32.0	78.4
Internal Link Dist (m)	264.9	264.9	267.8	267.8	267.8	267.8	258.2	258.2	204.1	204.1	204.1	204.1
Turn Bay Length (m)	25.0	98.4	460	1190	352	963	308	851	308	851	308	851
Base Capacity (vph)	538	984	460	1190	352	963	308	851	308	851	308	851
Sanctuary Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.29	0.70	0.93	0.65	0.46	0.65	0.40	0.60	0.40	0.60	0.40	0.60
Intersection Summary	Other											
Area Type:	Cycle Length: 122											
Actual Cycle Length:	113.7											
Natural Cycle:	95											
Control Type:	Actuated-Uncoordinated											
Maximum v/c Ratio:	0.96											
Intersection Signal Delay:	39.2											
Intersection LOS:	D											
Intersection Capacity Utilization	94.0%											
ICU Level of Service	F											

PM TT 2030 (2205:71) 8885 Lundy's Lane 1:45 pm 11-21-2022 PM - Total 2030
Paradigm Transportation Solutions Limited

Synchro 11 Report
Page 8

Analysis Period (min) 15
95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	←	←	←	←	←	←	←	←	←	←	←	←
Traffic Volume (vph)	110	528	83	357	558	87	104	288	292	105	377	64
Future Volume (vph)	110	528	83	357	558	87	104	288	292	105	377	64
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750	1750
Total Lost time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Lane Util. Factor	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95
Frpb, ped/bikes	1.00	0.99	1.00	0.99	1.00	0.99	1.00	0.98	1.00	0.99	1.00	0.99
Flpb, ped/bikes	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.98	1.00	0.98	1.00	0.98	1.00	0.92	1.00	0.97	1.00	0.97
Flt Protected	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00	0.95	1.00
Satd. Flow (prot)	1658	3146	1660	3178	1657	2956	1627	3149	1627	3149	1627	3149
Flt Permitted	0.35	1.00	0.18	1.00	0.34	1.00	0.27	1.00	0.34	1.00	0.27	1.00
Satd. Flow (perm)	605	3146	310	3178	584	2956	458	3149	584	2956	458	3149
Peak-Hour factor, PHF	0.71	0.90	0.84	0.83	0.85	0.74	0.64	0.96	0.89	0.86	0.90	0.89
Adj. Flow (vph)	155	587	99	430	656	118	162	300	328	122	419	93
RTOR Reduction (vph)	0	12	0	0	11	0	0	165	0	0	15	0
Lane Group Flow (vph)	155	674	0	430	763	0	163	473	0	122	497	0
Confl. Peds. (#/hr)	15	31	31	31	31	15	23	17	17	23	17	23
Heavy Vehicles (%)	0%	3%	1%	0%	2%	0%	0%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	pm+pt	NA	NA
Protected Phases	7	4	3	8	5	2	1	6	1	6	1	6
Permitted Phases	4	8	8	8	2	2	2	2	2	2	2	2
Actuated Green, G (s)	39.6	28.7	55.7	41.8	41.9	31.1	40.1	30.2	40.1	30.2	40.1	30.2
Effective Green, g (s)	39.6	28.7	55.7	41.8	41.9	31.1	40.1	30.2	40.1	30.2	40.1	30.2
Actuated g/C Ratio	0.35	0.25	0.49	0.37	0.37	0.27	0.35	0.27	0.35	0.27	0.35	0.27
Clearance Time (s)	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0	3.0	7.0
Vehicle Extension (s)	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
Lane Grp Cap (vph)	311	794	436	1168	317	808	263	836	317	808	263	836
v/s Ratio Prot	0.05	0.21	c0.21	0.24	c0.05	c0.16	0.04	0.16	c0.05	c0.16	0.04	0.16
v/s Ratio Perm	0.13	0.27	c0.27	0.65	0.14	0.12	0.12	0.12	0.14	0.12	0.12	0.12
v/c Ratio	0.50	0.85	0.99	0.65	0.51	0.58	0.46	0.59	0.51	0.58	0.46	0.59
Uniform Delay, d1	26.6	40.4	29.2	29.9	25.6	35.7	26.4	36.4	25.6	35.7	26.4	36.4
Progression Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	1.0	8.3	39.1	1.2	1.1	3.1	1.0	3.1	1.0	3.1	1.0	3.1
Delay (s)	27.6	48.8	68.3	31.1	26.7	38.8	27.4	39.5	26.7	38.8	27.4	39.5
Level of Service	C	D	E	C	C	D	C	D	C	D	C	D
Approach Delay (s)	44.9	44.4	44.4	36.3	37.2	37.2	37.2	37.2	36.3	37.2	37.2	37.2
Approach LOS	D	D	D	D	D	D	D	D	D	D	D	D
Intersection Summary												
HCM 2000 Control Delay	41.4											
HCM 2000 Level of Service	D											
HCM 2000 Volume to Capacity ratio	0.83											
Actuated Cycle Length (s)	113.7											
Sum of lost time (s)	20.0											
Intersection Capacity Utilization	94.0%											
ICU Level of Service	F											
Analysis Period (min)	15											
c Critical Lane Group												

Lanes, Volumes, Timings
104: Garner Rd & Site Driveway

PM TT 2030
01-26-2024

Lane Group	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations						
Traffic Volume (vph)	60	18	235	72	21	238
Future Volume (vph)	60	18	235	72	21	238
Ideal Flow (vphpl)	1750	1750	1750	1750	1750	1750
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00
Flt	0.968		0.968			
Flt Protected	0.963					0.996
Satd. Flow (prot)	1599	0	1661	0	0	1709
Flt Permitted	0.963					0.996
Satd. Flow (perm)	1599	0	1661	0	0	1709
Link Speed (k/h)	50		60			60
Link Distance (m)	155.3		159.5			245.6
Travel Time (s)	11.2		9.6			14.7
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	65	20	255	78	23	259
Shared Lane Traffic (%)						
Lane Group Flow (vph)	85	0	333	0	0	282
Enter Blocked Intersection	No	No	No	No	No	No
Lane Alignment	Left	Right	Left	Right	Left	Left
Median Width(m)	3.6		3.6			3.6
Link Offset(m)	0.0		0.0			0.0
Crosswalk Width(m)	4.8		4.8			4.8
Two way Left Turn Lane						
Headway Factor	1.11	1.11	1.11	1.11	1.11	1.11
Turning Speed (k/h)	100	100	100	100	100	100
Sign Control	Stop		Free			Free
Intersection Summary						
Area Type:	Other					
Control Type: Unsignalized						
Intersection Capacity Utilization 43.9%						
Analysis Period (min) 15						
ICU Level of Service A						

HCM Unsignalized Intersection Capacity Analysis
104: Garner Rd & Site Driveway


PM TT 2030
01-26-2024

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		P			4
Traffic Volume (veh/h)	60	18	235	72	21	238
Future Volume (Veh/h)	60	18	235	72	21	238
Sign Control	Stop		Free			Free
Grade	0%		0%			0%
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	65	20	255	78	23	259
Pedestrians						
Lane Width (m)						
Walking Speed (m/s)						
Percent Blockage						
Right turn flare (veh)						
Median type			None			None
Median storage (veh)						
Upstream signal (m)			159			
pK platoon unblocked						
VC, conflicting volume	599	294			333	
VC1, stage 1 conf vol						
VC2, stage 2 conf vol						
VCu, unblocked vol	599	294			333	
IC, single (s)	6.4	6.2			4.1	
IC, 2 stage (s)						
IF (s)	3.5	3.3			2.2	
p0 queue free %	86	97			98	
dM capacity (veh/h)	456	745			1226	
Direction, Lane #	WB 1	NB 1	SB 1			
Volume Total	85	333	282			
Volume Left	65	0	23			
Volume Right	20	78	0			
cSH	502	1700	1226			
Volume to Capacity	0.17	0.20	0.02			
Queue Length 95th (m)	4.8	0.0	0.5			
Control Delay (s)	13.6	0.0	0.8			
Lane LOS	B		A			
Approach Delay (s)	13.6	0.0	0.8			
Approach LOS	B					
Intersection Summary						
Average Delay			2.0			
Intersection Capacity Utilization			43.9%			A
Analysis Period (min)			15			

Appendix E

Left-Turn Lane Nomographs

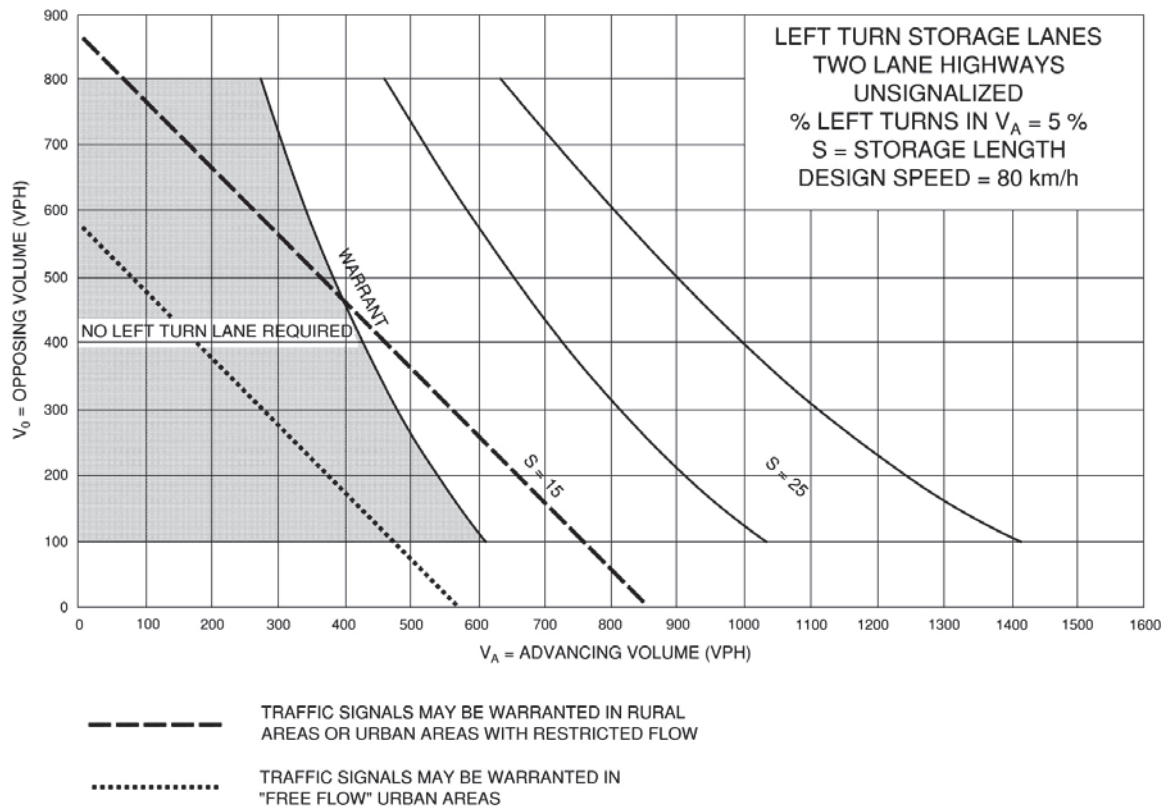

Exhibit 9A-14

AM Peak Hour

PM Peak Hour

